



DEVELOPER GUIDE FOXIT PDF SDK

For .NET

TABLE OF CONTENTS

1	Introduction to Foxit PDF SDK	1
1.1	Why Choose Foxit PDF SDK.....	1
1.2	Foxit PDF SDK for .NET.....	2
1.3	Evaluation	2
1.4	License	2
1.5	About this guide.....	2
2	Getting Started.....	3
2.1	System Requirements.....	3
2.2	What is in the package	3
2.3	How to run a demo	4
2.4	How to create a simple project.....	6
3	Working with SDK API.....	11
3.1	Initialize Library	11
3.1.1	How to initialize Foxit PDF SDK	11
3.2	Document.....	11
3.2.1	How to create a PDF document from scratch	11
3.2.2	How to load an existing PDF document from file path	12
3.2.3	How to load an existing PDF document from a memory buffer	12
3.2.4	How to load an existing PDF document from a file read callback object	12
3.2.5	How to load PDF document and get the first page of the PDF document	13
3.2.6	How to save a PDF to a file	14
3.2.7	How to save a document into memory buffer by FileWriterCallback	14
3.3	Page.....	15
3.3.1	How to get page size	15
3.3.2	How to calculate bounding box of page contents	15

3.3.3	How to create a PDF page and set the size	16
3.3.4	How to delete a PDF page.....	16
3.3.5	How to flatten a PDF page	16
3.3.6	How to get and set page thumbnails in a PDF document	17
3.4	Render.....	17
3.4.1	How to render a page to a bitmap	17
3.4.2	How to render page and annotation.....	18
3.5	Attachment.....	19
3.5.1	How to export the embedded attachment file from a PDF and save it as a single file	19
3.5.2	How to remove all the attachments of a PDF.....	19
3.6	Text Page	20
3.6.1	How to extract text from a PDF page	20
3.6.2	How to get the text within a rectangle area in a PDF	21
3.7	Text Search.....	21
3.7.1	How to search a text pattern in a page.....	21
3.8	Search and Replace	22
3.8.1	System requirements.....	22
3.8.2	How to work with the search and replace function.....	22
3.9	Text Link.....	23
3.9.1	How to retrieve hyperlinks in a PDF page.....	23
3.10	Bookmark	23
3.10.1	How to find and list all bookmarks of a PDF	24
3.10.2	How to insert a new bookmark.....	24
3.10.3	How to create a table of contents based on bookmark information in PDFs	25
3.11	Form (AcroForm)	25
3.11.1	How to load the forms in a PDF	26
3.11.2	How to count form fields and get the properties	26
3.11.3	How to export the form data in a PDF to a XML file	27
3.11.4	How to import form data from a XML file	27

3.11.5	How to get and set the properties of form fields	27
3.11.6	How to get coordinates of a form field	28
3.12	XFA Form.....	29
3.12.1	How to load XFADoc and represent an Interactive XFA form.....	29
3.12.2	How to export and import XFA form data	30
3.13	Form Filler.....	30
3.14	Form Design	30
3.14.1	How to add a text form field to a PDF.....	31
3.14.2	How to remove a text form field from a PDF	31
3.15	Annotations	31
3.15.1	General.....	31
3.15.2	Import annotations from or export annotations to a FDF file	37
3.16	Image Conversion.....	37
3.16.1	How to convert PDF pages to bitmap files.....	37
3.16.2	How to convert an image file to PDF file.....	39
3.17	Watermark.....	39
3.17.1	How to create a text watermark and insert it into the first page	39
3.17.2	How to create an image watermark and insert it into the first page	40
3.17.3	How to remove all watermarks from a page.....	41
3.18	Barcode.....	41
3.18.1	How to generate a barcode bitmap from a string	41
3.19	Security	42
3.19.1	How to encrypt a PDF file with user password "123" and owner password "456"	42
3.19.2	How to encrypt a PDF file with Certificate	43
3.19.3	How to encrypt a PDF file with Foxit DRM	43
3.20	Reflow	44
3.20.1	How to create a reflow page and render it to a bmp file.....	44
3.21	Asynchronous PDF	45
3.22	Pressure Sensitive Ink.....	45

3.22.1	How to create a PSI and set the related properties for it	45
3.23	Wrapper	46
3.23.1	How to open a document including wrapper data.....	46
3.24	PDF Objects	47
3.24.1	How to remove some properties from catalog dictionary	47
3.25	Page Object	47
3.25.1	How to create a text object in a PDF page	48
3.25.2	How to add an image logo to a PDF page.....	48
3.26	Marked content	49
3.26.1	How to get marked content in a page and get the tag name.....	49
3.27	Layer	49
3.27.1	How to create a PDF layer.....	50
3.27.2	How to set all the layer nodes information	50
3.27.3	How to edit layer tree.....	51
3.28	Signature.....	51
3.28.1	How to sign the PDF document with a signature	52
3.28.2	How to sign the PDF with a X509 certificate from Windows Certificate Store	53
3.29	Long term validation (LTV)	60
3.29.1	How to establish long term validation of signatures using the default signature callback for subfilter "ETSI.RFC3161" and the default RevocationCallback.....	60
3.30	PADES	62
3.31	PDF Action	63
3.31.1	How to create a URI action and insert to a link annot.....	63
3.31.2	How to create a GoTo action and insert to a link annot	63
3.32	JavaScript	64
3.32.1	How to add JavaScript Action to Document	65
3.32.2	How to add JavaScript Action to Annotation	65
3.32.3	How to add JavaScript Action to FormField	65
3.32.4	How to add a new annotation to PDF using JavaScript.....	66

3.32.5	How to get/set properties of annotations (strokeColor, fillColor, readOnly, rect, type) using JavaScript.....	67
3.32.6	How to destroy annotation using JavaScript	67
3.33	Redaction.....	68
3.33.1	How to redact the text "PDF" on the first page of a PDF	69
3.34	Comparison.....	70
3.34.1	How to compare two PDF documents and save the differences between them into a PDF file	70
3.35	OCR.....	71
3.35.1	System requirements.....	72
3.35.2	Trial Limit for SDK OCR Add-on Module.....	72
3.35.3	OCR resource files	72
3.35.4	How to run the OCR demo	73
3.35.5	OCRTool	75
3.36	Compliance.....	78
3.36.1	System Requirements	79
3.36.2	Compliance resource files	79
3.36.3	How to run the compliance or preflight demo	80
3.37	Optimization.....	83
3.37.1	How to optimize PDF files by compressing the color/grayscale/monochrome images.....	83
3.38	HTML to PDF Conversion.....	84
3.38.1	System requirements.....	84
3.38.2	HTML to PDF engine files	84
3.38.3	How to run the html2pdf demo.....	84
3.38.4	How to work with Html2PDF API.....	88
3.38.5	How to get HTML data from stream and convert it to a PDF file.....	89
3.39	Office to PDF Conversion with third-party engines	90
3.39.1	System requirements.....	91
3.39.2	How to convert Word to PDF.....	92
3.39.3	How to convert Excel to PDF	92

3.39.4	How to convert PowerPoint to PDF	92
3.40	Office to PDF Conversion with Foxit's self-developed engines	93
3.40.1	System requirements	93
3.40.2	Office to PDF resource files (Foxit PDF Conversion SDK)	93
3.40.3	How to run the office2pdf demo using Foxit PDF Conversion SDK	93
3.40.4	How to convert office files to PDF with Foxit's self-developed engines	94
3.41	Output Preview	94
3.41.1	System requirements	94
3.41.2	How to run the output preview demo	95
3.41.3	How to do output preview using Foxit PDF SDK	95
3.42	Combination	96
3.42.1	How to combine several PDF files into one PDF file	96
3.43	PDF Portfolio	96
3.43.1	System requirements	96
3.43.2	How to create a new and blank PDF portfolio	97
3.43.3	How to create a Portfolio object from a PDF portfolio	97
3.43.4	How to get portfolio nodes	98
3.43.5	How to add file node or folder node	99
3.43.6	How to remove a node	100
3.44	Table Maker	100
3.44.1	System requirements	100
3.44.2	How to add table to a PDF document	100
3.45	Accessibility	102
3.45.1	System requirements	102
3.45.2	How to tag a PDF document	102
3.46	PDF to Office Conversion	103
3.46.1	System requirements	103
3.46.2	PDF to Office resource files	103
3.46.3	How to run the pdf2office demo	104

3.46.4	How to work with PDF2office API	105
3.47	DWG to PDF Conversion	107
3.47.1	System requirements	107
3.47.2	DWG To PDF engine files	107
3.47.3	How to run the dwg2pdf demo	107
3.47.4	How to convert DWG to PDF	107
3.48	OFD	108
3.48.1	System requirements	109
3.48.2	OFD engine file	109
3.48.3	How to run the ofd demo	109
3.48.4	How to implement the conversion between OFD file and PDF file	109
3.48.5	How to render OFD page	110
3.49	Paragraph Editing	110
3.49.1	System requirements	111
3.49.2	How to work with paragraph editing	111
3.50	3D Rendering	114
3.50.1	System requirements	114
3.50.2	How to display the 3D annotation	115
3.50.3	How to set render mode and controller	115
FAQ	116
Appendix	121
	Supported JavaScript List	121
References	135
Support	136

1 INTRODUCTION TO FOXIT PDF SDK

Have you ever thought about building your own application that can do everything you want with PDF files? If your answer is "Yes", congratulations! You just found the best solution in the industry that allows you to build stable, secure, efficient and full-featured PDF applications.

Foxit PDF SDK provides high-performance libraries to help any software developer add robust PDF functionality to their enterprise, mobile and cloud applications across all platforms (includes Windows, Mac, Linux, Web, Android, iOS, and UWP), using the most popular development languages and environments.

1.1 Why Choose Foxit PDF SDK

Foxit is a leading software provider of solutions for reading, editing, creating, organizing, and securing PDF documents. Foxit PDF SDK libraries have been used in many of today's leading apps, and are proven, robust, and battle-tested to provide the quality, performance, and features that the industry's largest apps demand. Customers choose Foxit PDF SDK product for the following reasons:

- **Easy to integrate**

Developers can seamlessly integrate Foxit PDF SDK into their own applications.

- **Lightweight footprint**

Does not exhaust system resource and deploys quickly.

- **Cross-platform support**

Support current mainstream platforms, such as Windows, Mac, Linux, Web, Android, iOS, and UWP.

- **Powered by Foxit's high fidelity rendering PDF engine**

The core technology of the SDK is based on Foxit's PDF engine, which is trusted by a large number of the world's largest and well-known companies. Foxit's powerful engine makes the app fast on parsing, rendering, and makes document viewing consistent on a variety of devices.

- **Premium World-side Support**

Foxit offers premium support for its developer products because when you are developing mission critical products you need the best support. Foxit has one of the PDF industry's largest team of support engineers. Updates are released on a regular basis to improve user experience by adding new features and enhancements.

1.2 Foxit PDF SDK for .NET

Application developers who use Foxit PDF SDK can leverage Foxit's powerful, standard-compliant PDF technology to securely display, create, edit, annotate, format, organize, print, share, secure, search documents as well as to fill PDF forms. Additionally, Foxit PDF SDK (for C++ and .NET) includes a built-in, embeddable PDF Viewer, making the development process easier and faster. For more detailed information, please visit the website <https://developers.foxitsoftware.com/pdf-sdk/>.

In this guide, we focus on the introduction of Foxit PDF SDK for Windows platform with .NET framework.

Foxit PDF SDK for .NET is a Component for Windows which ships with simple-to-use APIs that can help .NET developers seamlessly integrate powerful PDF technology into their own projects based on .NET Framework 4.0 or higher. It provides rich features on PDF documents, such as PDF viewing, bookmark navigating, text selecting/copying/searching, PDF signatures, PDF forms, rights management, PDF annotations, and full text search.

1.3 Evaluation

Foxit PDF SDK allows users to download a trial version to evaluate the SDK. The trial version has no difference from a standard version except for the 10-day limitation trial period and the trail watermarks that will be generated on the PDF pages. After the evaluation period expires, customers should contact Foxit sales team and purchase licenses to continue using Foxit PDF SDK.

1.4 License

Developers should purchase licenses to use Foxit PDF SDK in their solutions. Licenses grant users permissions to release their applications based on PDF SDK libraries. However, users are prohibited to distribute any documents, sample codes, or source codes in the SDK released package to any third party without the permission from Foxit Software Incorporated.

1.5 About this guide

This guide is intended for developers who need to integrate Foxit PDF .NET SDK into their own applications. It aims at introducing the installation package, and the usage of SDK.

2 GETTING STARTED

It's very easy to setup Foxit PDF SDK and see it in action! This guide will provide you with a brief introduction on how to integrate Foxit PDF SDK into the projects based on .NET Framework 4.0 or higher. The following sections introduce the contents of system requirements, the installation package as well as how to run a demo, and create your own project.

2.1 System Requirements

Windows 8, 10 and 11 (32-bit and 64-bit)

Windows Server 2012 or later (32-bit and 64-bit)

The release package includes a 32-bit version and native 64-bit version DLL library for Windows 32/64.

Visual Studio 2010/2015/2017/2019/2022 installed with .NET Framework 4.0 or higher

Note:

- *It only supports for Windows 8/10 classic style, but not for Store App or UWP app.*
- *If you are using an older version of Windows (for example, Windows 7 and Windows Server 2008), you may need to visit this link <https://support.microsoft.com/en-us/help/4019990/update-for-the-d3dcompiler-47-dll-component-on-windows> to download and install the "D3DCOMPILER_47.dll". If you do not do this, you may encounter errors.*

2.2 What is in the package

Download the Foxit PDF SDK zip for .NET package and extract it to a new directory. The release package contains the following folders:

doc:	API references, developer guide
examples:	sample projects and demos
lib:	libraries and license files
res:	the default icc profile files used for output preview demo

In the "examples" folder, there are two types of demos. "examples\simple_demo" contains more than 30 demos that cover a wide range of PDF applications. "examples\view_demo" contains a UI demo that realizes a lite PDF viewer.

Note: You can obtain this package directly from NuGet.

2.3 How to run a demo

Simple Demo

Simple demo projects provide examples to show .NET developers about how to effectively apply Foxit PDF SDK APIs to complete their applications.

To run a demo in Visual Studio 2010/2015/2017/2019/2022 (except ocr, compliance, preflight, html2pdf, office2pdf, output preview, pdf2office, dwg2pdf and ofd demos which will be introduced in section 3), you can follow the steps below:

- 1) Load the visual studio solution file "simple_demo_vs2010.sln" or "simple_demo_vs2015.sln" or "simple_demo_vs2017.sln" or "simple_demo_vs2019.sln" or "simple_demo_vs2022.sln" (depending on your Visual Studio version) in the "examples\simple_demo" folder.
- 2) Build all the demos by clicking "Build > Build Solution". Alternatively, if you merely want to build a specific demo, you can right-click it and then choose "Build" or load the "*.csproj" file in the folder of a specific demo project and then build it.

After building, the executable file ".exe" will be generated in the "examples\simple_demo\bin" folder. The names of the executable files depend on the build configurations.

- 3) Run a specific executable file by double-clicking it. If you want to see the detailed executing processes, you can run it in command line. Start "cmd.exe", navigate to "examples\simple_demo\bin", and run a specific executable file.

"examples\simple_demo\input_files" contains all the input files used among these demos. Some demos will generate output files (pdf, text or image files) to a folder named by the project name under "examples\simple_demo\output_files\" folder.

In "examples\simple_demo\output_files\security" folder, if you want to open the "certificate_encrypt.pdf" document, you should install the certificates "foxit.cer" and "foxit_all.pfx" found in "examples\simple_demo\input_files" folder at first. Please follow the steps below:

- a) To install "foxit.cer", double-click it to start the certificate import wizard. Then select "Install certificate... > Next > Next > Finish".
- b) To install "foxit_all.pfx", double-click it to start the certificate import wizard. Then select "Next > Next > (Type the password for the private key in the textbox) and click Next > Next > Finish".

OCR and Compliance/Preflight demos

For **ocr** and **compliance/preflight** demos, you should build a resource directory at first, please contact Foxit support team or sales team to get the resource files packages. For more details about how to run the demos, please refer to section "[OCR](#)" and section "[Compliance](#)".

HTML to PDF demo

For html2pdf demo, you should contact Foxit support team or sales team to get the engine files package for converting from HTML to PDF at first. For more details about how to run the demo, please refer to section "[HTML to PDF Conversion](#)".

Office to PDF demo

For **office2pdf** demo, you need to refer to section "[Office to PDF Conversion with third-party engines](#)" and "[Office to PDF Conversion with Foxit's self-developed engines](#)".

Output Preview demo

For output preview demo, you should set the folder path which contains default icc profile files. For more details about how to run the demo, please refer to section "[Output Preview](#)".

PDF to Office demo

For **pdf2office** demo, you should contact Foxit support team or sales team to get the engine files package for converting from PDF to office at first. For more details about how to run the demo, please refer to section "[PDF to Office Conversion](#)".

DWG to PDF demo

For dwg2pdf demo, you should contact Foxit support team or sales team to get the engine files package for converting from DWG to PDF at first. For more details about how to run the demo, please refer to section "[DWG to PDF Conversion](#)".

OFD demo

For ofd demo, you should contact Foxit support team or sales team to get the OFD engine files package at first. For more details about how to run the demo, please refer to section "[OFD](#)".

[View Demo](#)

This view demo provides an example for .NET developers to realize a PDF reader using PDF SDK APIs.

To run the demo in Visual Studio, load "PDFReader_VS2010.sln" or "PDFReader_VS2015.sln" or "PDFReader_VS2017.sln" or "PDFReader_VS2019.sln" or "PDFReader_VS2022.sln" (depending on your Visual Studio version) in the "examples\view_demo\PDFReader" folder, and then click "Debug > Start Without Debugging" to run it.

After the demo runs successfully, you can click on **File > Open** or click the directory icon to open a PDF file. This demo provides the features like rendering a PDF document, zooming, page rotation, text selection and search, and page turning.

2.4 How to create a simple project

In this section, we will show you how to use Foxit PDF .NET SDK to create a simple project that renders the first page of a PDF to a bitmap and saves it as a JPG image. Please follow the steps below:

- 1) Open Visual Studio and create a new C# Console Application named "test_dotnet".
- 2) Copy the "**lib**" folder from the "foxitpdfsdk_11_1_win_dotnet" folder to the project "test_dotnet" folder.
- 3) Add Foxit PDF SDK dynamic library to **References**. In order to use Foxit PDF SDK APIs in the project, you must first add a reference to it.
 - i. In Solution Explorer, right-click the "test_dotnet" project and click **Add Reference...**
 - ii. In the **Add Reference** dialog, click **Browse** tab, navigate to the "test_dotnet\lib\x64_vc17", "test_dotnet\lib\x86_vc17" or "test_dotnet\lib\anycpu_vc17" folder depending on your build configurations, select **fsdk_dotnet.dll** dynamic library, and then click **OK**.

Note: Please make sure that the "fsdk_dotnet.dll" architecture needs to match the platform target (Win32, Win64 or AnyCPU) of the application.

- 4) Add "fsdk.dll" to the project.

For the *Win32* or *Win64* platform target, right-click the "test_dotnet" project and click **Add > Existing Item...**, navigate to the "test_dotnet\lib\x64_vc17" or "test_dotnet\lib\x86_vc17" folder depending on your build configurations, select **fsdk.dll** dynamic library, and click **Add**.

For the *AnyCPU* platform target:

- Right-click the "test_dotnet" project and click **Add > New Folder...** to add a folder named "x64". Then right-click the "x64" folder and click **Add > Existing Item...**, navigate to the "test_dotnet\lib\x64_vc17\", select **fsdk.dll** dynamic library, and click **Add**.
- Right-click the "test_dotnet" project and click **Add > New Folder...** to add a folder named "x86". Then right-click the "x86" folder and click **Add > Existing Item...**, navigate to the "test_dotnet\lib\x86_vc17\", select **fsdk.dll** dynamic library, and click **Add**.

Note:

- *Please make sure to set the property "Copy to Output Directory" of "fsdk.dll" to "Copy if newer". Otherwise, you should copy it to the same folder with the executable file manually before running the project.*
- *For AnyCPU, it is necessary to successfully call **Library.Initialize** before creating the SDK object.*

- 5) Add using statement to the beginning of the "Program.cs".

```
using foxit;  
using foxit.common;  
using foxit.common.fxcr;  
using foxit.pdf;
```

- 6) Initialize Foxit PDF SDK library. It is necessary for apps to initialize Foxit PDF SDK using a license before calling any APIs. The trial license files can be found in the "lib" folder.

```
string sn = " ";  
string key = " ";  
ErrorCode error_code = Library.Initialize(sn, key);  
if (error_code != ErrorCode.e_ErrSuccess)  
{  
    return;  
}
```

Note The value of "sn" can be got from "**gsdk_sn.txt**" (the string after "SN=") and the value of "key" can be got from "**gsdk_key.txt**" (the string after "Sign=").

- 7) Load a PDF document, and parse the first page of the document. Let us assume that you have already put a "Sample.pdf" to the "test_dotnet\test_dotnet" folder.

```
PDFDoc doc = new PDFDoc("../Sample.pdf");  
error_code = doc.LoadW("");  
if (error_code != ErrorCode.e_ErrSuccess)
```

```
{
    return;
}

// Get the first page of the document.
PDFPage page = doc.GetPage(0);

// Parse page.
page.StartParse((int)foxit.pdf.PDFPage.ParseFlags.e_ParsePageNormal, null, false);
```

- 8) Render a Page to a bitmap and save it as a JPG file.

```
int width = (int)(page.GetWidth());
int height = (int)(page.GetHeight());
Matrix2D matrix = page.GetDisplayMatrix(0, 0, width, height, page.GetRotation());

// Prepare a bitmap for rendering.
foxit.common.Bitmap bitmap = new foxit.common.Bitmap(width, height,
foxit.common.Bitmap.DIBFormat.e_DIBArgb, System.IntPtr.Zero, 0);
bitmap.FillRect(0xFFFFFFFF, null);

// Render page
Renderer render = new Renderer(bitmap, false);
render.StartRender(page, matrix, null);

// Add the bitmap to image and save the image.
foxit.common.Image image = new foxit.common.Image();
image.AddFrame(bitmap);
image.SaveAs("testpage.jpg");
```

- 9) Click "Build > Build Solution" to build the project. The executable file "test_dotnet.exe" will be generated in "test_dotnet\test_dotnet\bin\Debug" or "test_dotnet\test_dotnet\bin\Release" folder depending on the build configurations.

Note:

- For the Win32 or Win64 platform target, please check whether the "fsdk.dll" and "fsdk_dotnet.dll" have been copied to the same folder with the "test_dotnet.exe".
- For the AnyCPU platform target, please check whether the "fsdk_dotnet.dll" has been copied to the same folder as the "test_dotnet.exe". Additionally, ensure that the "fsdk.dll" from the "x64_vc17" folder has been correctly placed in the "x64" folder, and the "fsdk.dll"

from the "x86_vc17" folder is appropriately located in the "x86" folder along with the "test_dotnet.exe". If not, you should put the dynamic libraries to the folder manually.

- 10) Double-click the executable file "test_dotnet.exe" to run this project, and then the "testpage.jpg" will be generated in the current folder.

The final contents of "Program.cs" is as follow:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;

using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

namespace test_dotnet
{
    class Program
    {
        static void Main(string[] args)
        {
            // The value of "sn" can be got from "gsdk_sn.txt" (the string after "SN=").
            // The value of "key" can be got from "gsdk_key.txt" (the string after "Sign=").
            string sn = " ";
            string key = " ";
            ErrorCode error_code = Library.Initialize(sn, key);
            if (error_code != ErrorCode.e_ErrSuccess)
            {
                return;
            }

            using (PDFDoc doc = new PDFDoc("../Sample.pdf"))
            {
                error_code = doc.LoadW("");
                if (error_code != ErrorCode.e_ErrSuccess)
                {
                    Library.Release();
                    return;
                }

                using (PDFPage page = doc.GetPage(0))
                {
                    // Parse page.
                    page.StartParse((int)foxit.pdf.PDFPage.ParseFlags.e_ParsePageNormal, null, false);

                    int width = (int)(page.GetWidth());
                    int height = (int)(page.GetHeight());
                }
            }
        }
    }
}
```

```
Matrix2D matrix = page.GetDisplayMatrix(0, 0, width, height, page.GetRotation());

// Prepare a bitmap for rendering.
foxit.common.Bitmap bitmap = new foxit.common.Bitmap(width, height,
foxit.common.Bitmap.DIBFormat.e_DIBArgb, System.IntPtr.Zero, 0);
bitmap.FillRect(0xFFFFFFFF, null);

// Render page
Renderer render = new Renderer(bitmap, false);
render.StartRender(page, matrix, null);

// Add the bitmap to image and save the image.
foxit.common.Image image = new foxit.common.Image();
image.AddFrame(bitmap);
image.SaveAs("testpage.jpg");
    }
}
Library.Release();
}
}
```

3 WORKING WITH SDK API

In this section, we will introduce a set of major features and list some examples for each feature to show you how to integrate powerful PDF capabilities with your applications based on .NET Framework 4.0 or higher. You can refer to the API reference ^[2] to get more details about the APIs used in all of the examples.

3.1 Initialize Library

It is necessary for applications to initialize Foxit PDF SDK before calling any APIs. The function [foxit.common.Library.Initialize](#) is provided to initialize Foxit PDF SDK. A license should be purchased for the application and pass unlock key and code to get proper support. When there is no need to use Foxit PDF SDK any more, please call function [foxit.common.Library.Release](#) to release it.

Note: The parameter "sn" can be found in the "**gsdk_sn.txt**" (the string after "SN=") and the "key" can be found in the "**gsdk_key.txt**" (the string after "Sign=").

Example:

3.1.1 How to initialize Foxit PDF SDK

```
using foxit.common;

string sn = " ";
string key = " ";
ErrorCode error_code = Library.Initialize(sn, key);
if (error_code != ErrorCode.e_ErrSuccess)
    return;
...
```

3.2 Document

A PDF document object can be constructed with an existing PDF file from file path, memory buffer, a custom implemented ReaderCallback object and an input file stream. Then call function [PDFDoc.Load](#) or [PDFDoc.StartLoad](#) to load document content. A PDF document object is used for document level operation, such as opening and closing files, getting page, annotation, metadata and etc.

Example:

3.2.1 How to create a PDF document from scratch

```
using foxit.pdf;
...
```

```
PDFDoc doc = new PDFDoc();
```

Note: It creates a new PDF document without any pages.

3.2.2 How to load an existing PDF document from file path

```
using foxit.pdf;
using foxit.common;
...

PDFDoc doc = new PDFDoc("Sample.pdf");
error_code = doc.Load(null);
if (error_code != ErrorCode.e_ErrSuccess) return;
```

3.2.3 How to load an existing PDF document from a memory buffer

```
using foxit;
using foxit.pdf;
using foxit.common;
...

byte[] byte_buffer = File.ReadAllBytes(input_file);
IntPtr buffer = System.Runtime.InteropServices.Marshal.AllocHGlobal(byte_buffer.Length);
try
{
    System.Runtime.InteropServices.Marshal.Copy(byte_buffer, 0, buffer, byte_buffer.Length);
    PDFDoc doc = new PDFDoc(buffer, (uint)byte_buffer.Length);
    error_code = doc.Load(null);
    if (error_code != ErrorCode.e_ErrSuccess) return;
    ...
}
catch (foxit.PDFException e)
{
    Console.WriteLine("Error:{0}", e.GetErrorCode());
}
catch (System.Exception e)
{
    Console.WriteLine(e.Message);
}
finally
{
    System.Runtime.InteropServices.Marshal.FreeHGlobal(buffer);
}
...
```

3.2.4 How to load an existing PDF document from a file read callback object

```
using foxit.pdf;
using foxit.common;
...
```

```
class FileReader : FileReaderCallback
{
    private FileStream file_ = null;
    private long offset_ = 0;

    public FileReader(long offset)
    {
        this.offset_ = offset;
    }

    public Boolean LoadFile(String file_path)
    {
        file_ = new FileStream(file_path, FileMode.OpenOrCreate);
        return true;
    }

    public override long GetSize()
    {
        return this.offset_;
    }

    public override bool ReadBlock(IntPtr buffer, long offset, uint size)
    {
        int read_size = 0;
        file_.Seek(offset, SeekOrigin.Begin);
        byte[] array = new byte[size + 1];
        read_size = file_.Read(array, 0, (int)size);
        Marshal.Copy(array, 0, buffer, (int)size);
        return read_size == size ? true : false;
    }

    public override void Release()
    {
        {
            this.file_.Close();
        }
    }
}

...

FileReader file_reader = new FileReader(offset);
file_reader.LoadFile(file_name);

PDFDoc doc_real = new PDFDoc(file_reader, false)
error_code = doc.Load(null);
if (error_code != ErrorCode.e_ErrSuccess) return;

...
```

3.2.5 How to load PDF document and get the first page of the PDF document

```
using foxit.pdf;
using foxit.common;

...
```

```
PDFDoc doc = new PDFDoc("Sample.pdf");
error_code = doc.Load(null);
if (error_code != ErrorCode.e_ErrSuccess) return;
...
// Get the first page of the document.
PDFPage page = doc.GetPage(0);
// Parse page.
page.StartParse((int)foxit.pdf.PDFPage.ParseFlags.e_ParsePageNormal, null, false);
...
```

3.2.6 How to save a PDF to a file

```
using foxit.pdf;
using foxit.common;
...

PDFDoc doc = new PDFDoc("Sample.pdf");
error_code = doc.Load(null);
if (error_code != ErrorCode.e_ErrSuccess) return;
...
// Do operations for the PDF document.
...
// Save the changes for the PDF document.
string newPdf = "the output path for the saved PDF";
doc.SaveAs(newPdf, (int)PDFDoc.SaveFlags.e_SaveFlagNoOriginal);
```

3.2.7 How to save a document into memory buffer by FileWriterCallback

```
using foxit.pdf;
using foxit.common;
using foxit.common.fxcr;
using System.IO;
using System.Runtime.InteropServices;
...

class FileWriter : FileWriterCallback
{
    private MemoryStream memoryfilestream = new MemoryStream();
    public FileWriter()
    {
    }

    public override long GetSize()
    {
        return this.memoryfilestream.Length;
    }

    public override bool WriteBlock(IntPtr pData, long offset, uint size)
    {
        byte[] ys = new byte[size];
        Marshal.Copy(pData, ys, 0, (int)size);
    }
}
```

```
memoryfilestream.Write(ys, 0, (int)size);
return true;
}

public override bool Flush()
{
    return true;
}

public override void Release()
{
}
}
...

FileWriter fileWriter = new FileWriter();

// Assuming PDFDoc doc has been loaded.
...

doc.StartSaveAs(fileWriter, (int) PDFDoc.SaveFlags.e_SaveFlagNoOriginal, null);
...
```

3.3 Page

PDF Page is the basic and important component of PDF Document. A [PDFPage](#) object is retrieved from a PDF document by function [PDFDoc.GetPage](#). Page level APIs provide functions to parse, render, edit (includes creating, deleting and flattening) a page, retrieve PDF annotations, read and set the properties of a page, and etc. For most cases, A PDF page needs to be parsed before it is rendered or processed.

Example:

3.3.1 How to get page size

```
using foxit.pdf;
using foxit.common;
...

// Assuming PDFPage page has been loaded and parsed.
...
int width = (int)(page.GetWidth());
int height = (int)(page.GetHeight());
...
```

3.3.2 How to calculate bounding box of page contents

```
using foxit.pdf;
```

```
...  
  
// Assuming PDFPage page has been loaded and parsed.  
...  
  
RectF ret = page.CalcContentBBox(PDFPage.CalcMarginMode.e_CalcContentsBox);  
...  

```

3.3.3 How to create a PDF page and set the size

```
using foxit.pdf;  
...  
  
// Assuming PDFDoc doc has been loaded.  
  
PDFPage page = doc.InsertPage(index, PageWidth, PageHeight);  

```

3.3.4 How to delete a PDF page

```
using foxit.pdf;  
...  
  
// Assuming PDFDoc doc has been loaded.  
  
// Remove a PDF page by page index.  
doc.RemovePage(index);  
  
// Remove a specified PDF page.  
doc.RemovePage(page);  
...  

```

3.3.5 How to flatten a PDF page

```
using foxit.pdf;  
...  
  
// Assuming PDFPage page has been loaded and parsed.  
  
// Flatten all contents of a PDF page.  
page.Flatten(true, (int)PDFPage.FlattenOptions.e_FlattenAll);  
  
// Flatten a PDF page without annotations.  
page.Flatten(true, (int)PDFPage.FlattenOptions.e_FlattenNoAnnot);  
  
// Flatten a PDF page without form controls.  
page.Flatten(true, (int)PDFPage.FlattenOptions.e_FlattenNoFormControl);  
  
// Flatten a PDF page without annotations and form controls (Equals to nothing to be flattened).  
page.Flatten(true, (int)(PDFPage.FlattenOptions.e_FlattenNoAnnot |  
PDFPage.FlattenOptions.e_FlattenNoFormControl));  
...  

```


3.3.6 How to get and set page thumbnails in a PDF document

```
using foxit.pdf;
...

// Assuming PDFPage page has been loaded and parsed.

// Get page thumbnails.
page.LoadThumbnail();

// Set thumbnails to the page.
// Assuming Bitmap bitmap has been created.
page.SetThumbnail(bitmap);
...
```

3.4 Render

PDF rendering is realized through the Foxit renderer, a graphic engine that is used to render page to a bitmap or platform graphics device. Foxit PDF SDK provides APIs to set rendering options/flags, for example set flag to decide whether to render form fields and signature, whether to draw image anti-aliasing and path anti-aliasing. To do rendering, you can use the following APIs:

- To render page and annotations, first use function [Renderer.SetRenderContentFlags](#) to decide whether to render page and annotation both or not, and then use function [Renderer.StartRender](#) to do the rendering. Function [Renderer.StartQuickRender](#) can also be used to render page but only for thumbnail purpose.
- To render a single annotation, use function [Renderer.RenderAnnot](#).
- To render on a bitmap, use function [Renderer.StartRenderBitmap](#).
- To render a reflowed page, use function [Renderer.StartRenderReflowPage](#).

Widget annotation is always associated with form field and form control in Foxit PDF SDK. For how to render widget annotations, here is a recommended flow:

- After loading a PDF page, first render the page and all annotations in this page (including widget annotations).
- Then, if use [pdf.interform.Filler](#) object to fill the form, the function [pdf.interform.Filler.Render](#) should be used to render the focused form control instead of the function [Renderer.RenderAnnot](#).

Example:

3.4.1 How to render a page to a bitmap

```
using foxit;
```

```
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

// Assuming PDFPage page has been loaded and parsed.

int width = (int)(page.GetWidth());
int height = (int)(page.GetHeight());
Matrix2D matrix = page.GetDisplayMatrix(0, 0, width, height, page.GetRotation());

// Prepare a bitmap for rendering.
foxit.common.Bitmap bitmap = new foxit.common.Bitmap(width, height,
foxit.common.Bitmap.DIBFormat.e_DIBArgb, System.IntPtr.Zero, 0);
bitmap.FillRect(0xFFFFFFFF, null);

// Render page.
Renderer render = new Renderer(bitmap, false);
render.StartRender(page, matrix, null);
...
```

3.4.2 How to render page and annotation

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

// Assuming PDFPage page has been loaded and parsed.
...

int width = (int)(page.GetWidth());
int height = (int)(page.GetHeight());
Matrix2D matrix = page.GetDisplayMatrix(0, 0, width, height, page.GetRotation());

// Prepare a bitmap for rendering.
foxit.common.Bitmap bitmap = new foxit.common.Bitmap(width, height,
foxit.common.Bitmap.DIBFormat.e_DIBArgb, System.IntPtr.Zero, 0);
bitmap.FillRect(0xFFFFFFFF, null);

// Render page
Renderer render = new Renderer(bitmap, false);
render.SetRenderContentFlags((int)Renderer.ContentFlag.e_RenderAnnot |
(int)Renderer.ContentFlag.e_RenderPage);
render.StartRender(page, matrix, null);
...
```

3.5 Attachment

In Foxit PDF SDK, attachments are only referred to attachments of documents rather than file attachment annotation, which allow whole files to be encapsulated in a document, much like email attachments. PDF SDK provides applications APIs to access attachments such as loading attachments, getting attachments, inserting/removing attachments, and accessing properties of attachments.

Example:

3.5.1 How to export the embedded attachment file from a PDF and save it as a single file

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.objects;

// Assuming PDFDoc doc has been loaded.

string text_path = "The input path of the attached file you need to insert";
using (Attachments attachments = new Attachments(doc, new PDFNameTree()))
{
    int count = attachments.GetCount();
    for (int i = 0; i < count; i++)
    {
        string key = attachments.GetKey(i);
        using (FileSpec file_spec = attachments.GetEmbeddedFile(key))
        {
            if (!file_spec.IsEmpty())
            {
                string name = file_spec.GetFileName();
                if (file_spec.IsEmbedded())
                {
                    String exFilePath = "output_directory";
                    file_spec.ExportToFile(exFilePath);
                }
            }
        }
    }
}
...
```

3.5.2 How to remove all the attachments of a PDF

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.objects;

// Assuming PDFDoc doc has been loaded.
```

```
...
using (Attachments attachments = new Attachments(doc, new PDFNameTree()))
{
    int count = attachments.GetCount();
    for (int i = 0; i < count; i++)
    {
        string key = attachments.GetKey(i);
        attachment.RemoveEmbeddedFile(key);
    }
}
...
```

3.6 Text Page

Foxit PDF SDK provides APIs to extract, select, search and retrieve text in PDF documents. PDF text contents are stored in [TextPage](#) objects which are related to a specific page. [TextPage](#) class can be used to retrieve information about text in a PDF page, such as single character, single word, text content within specified character range or rectangle and so on. It also can be used to construct objects of other text related classes to do more operations for text contents or access specified information from text contents:

- To search text in text contents of a PDF page, construct a [TextSearch](#) object with [TextPage](#) object.
- To access text such like hypertext link, construct a [PageTextLinks](#) object with [TextPage](#) object.

Example:

3.6.1 How to extract text from a PDF page

```
using foxit.common;
using foxit.pdf;
...

// Assuming PDFPage page has been loaded and parsed.

using (var text_page = new TextPage(page, (int)TextPage.TextParseFlags.e_ParseTextNormal))
{
    int count = text_page.GetCharCount();
    if (count > 0)
    {
        String chars = text_page.GetChars(0, count);
        writer.Write(chars);
    }
}
...
```

3.6.2 How to get the text within a rectangle area in a PDF

```
using foxit.common;
using foxit.pdf;
using foxit.common.fxcr;
...

RectF rect = new RectF(100, 50, 220, 100);
TextPage text_page = new TextPage(page, (int)foxit.pdf.TextPage.TextParseFlags.e_ParseTextNormal);
String str_text = text_page.GetTextInRect(rect);
...
```

3.7 Text Search

Foxit PDF SDK provides APIs to search text in a PDF document, a XFA document, a text page or in a PDF annotation's appearance. It offers functions to do a text search and get the searching result:

- To specify the searching pattern and options, use functions [TextSearch.SetPattern](#), [TextSearch.SetStartPage](#) (only useful for a text search in PDF document), [TextSearch.SetEndPage](#) (only useful for a text search in PDF document) and [TextSearch.SetSearchFlags](#).
- To do the searching, use function [TextSearch.FindNext](#) or [TextSearch.FindPrev](#).
- To get the searching result, use function [TextSearch.GetMatchXXX\(\)](#).

Example:

3.7.1 How to search a text pattern in a page

```
using foxit.common;
using foxit.pdf;
...

// Assuming PDFDoc doc has been loaded.

using (TextSearch search = new TextSearch(doc, null, (int)TextPage.TextParseFlags.e_ParseTextNormal))
{
    int start_index = 0;
    int end_index = doc.GetPageCount() - 1;
    search.SetStartPage(0);
    search.SetEndPage(doc.GetPageCount() - 1);

    String pattern = "Foxit";
    search.SetPattern(pattern);

    Int32 flags = (int)TextSearch.SearchFlags.e_SearchNormal;
    search.SetSearchFlags(flags);
    int match_count = 0;
    while (search.FindNext())
```

```
{
    RectFArray rect_array = search.GetMatchRects();
    match_count++;
}
...
```

3.8 Search and Replace

The Search and Replace feature allows you to search for specific text content within a PDF document and replace it with new content.

3.8.1 System requirements

Platform: Windows, Linux, Mac

Programming Language: C, C++, Java, C#, Python, Objective-C, Node.js, Go

License Key requirement: 'AdvEdit' module permission in the license key

SDK Version: Foxit PDF SDK (C, C++, C#, Java, Python, Objective-C) 9.0 or higher; Foxit PDF SDK (Node.js) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

3.8.2 How to work with the search and replace function

```
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.addon.pageeditor;
...

using (PDFDoc doc = new PDFDoc(input_file))
{
    error_code = doc.Load(null);

    // Instantiate a TextSearchReplace object.
    using (TextSearchReplace searchreplace = new TextSearchReplace(doc))

        // Configure search options, match whole words only, whether to set match only whole words and match
        case.
        using (FindOption find_option = new FindOption(true, true))

            using (ReplaceCallbackImpl replace_callback = new ReplaceCallbackImpl())
            // Set replacing callback function.
            searchreplace.SetReplaceCallback(replace_callback);

            // Set keywords and page index to do searching and replacing.
            searchreplace.SetPattern("PDF", 0, find_option);

            // Replace with new text.
            while (searchreplace.ReplaceNext("PDC") == true) {}
}
```

3.9 Text Link

In a PDF page, some text contents that represent a hypertext link to a website or a resource on the internet, or an email address are the same with common texts. Prior to text link processing, user should first call [PageTextLinks.GetTextLink](#) to get a textlink object.

Example:

3.9.1 How to retrieve hyperlinks in a PDF page

```
using foxit.common;
using foxit.pdf;
...

// Assuming PDFPage page has been loaded and parsed.

// Get the text page object.
TextPage text_page = new TextPage(page, (int)foxit.pdf.TextPage.TextParseFlags.e_ParseTextNormal);
PageTextLinks page_textlinks = new PageTextLinks(text_page);
TextLink text_link = page_textlinks.GetTextLink(index); // specify an index.
string str_url = text_link.GetURI();
...
```

3.10 Bookmark

Foxit PDF SDK provides navigational tools called Bookmarks to allow users to quickly locate and link their point of interest within a PDF document. PDF bookmark is also called outline, and each bookmark contains a destination or actions to describe where it links to. It is a tree-structured hierarchy, so function [pdf.PDFDoc.GetRootBookmark](#) must be called first to get the root of the whole bookmark tree before accessing to the bookmark tree. Here, “root bookmark” is an abstract object which can only have some child bookmarks without next sibling bookmarks and any data (includes bookmark data, destination data and action data). It cannot be shown on the application UI since it has no data. Therefore, a root bookmark can only call function [Bookmark.GetFirstChild](#).

After the root bookmark is retrieved, following functions can be called to access other bookmarks:

- To access the parent bookmark, use function [Bookmark.GetParent](#).
- To access the first child bookmark, use function [Bookmark.GetFirstChild](#).
- To access the next sibling bookmark, use function [Bookmark.GetNextSibling](#).
- To insert a new bookmark, use function [Bookmark.Insert](#).
- To move a bookmark, use function [Bookmark.MoveTo](#).

Example:

3.10.1 How to find and list all bookmarks of a PDF

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.actions;
...

//Assuming PDFDoc doc has been loaded.
...
Bookmark root = doc.GetRootBookmark();
Bookmark first_bookmark = root.GetFirstChild();
if (first_bookmark != null)
{
    TraverseBookmark(first_bookmark, 0);
}

Private void TraverseBookmark(Bookmark root, int iLevel)
{
    if (root != null)
    {
        Bookmark child = root.GetFirstChild();
        while (child != null)
        {
            TraverseBookmark(child, iLevel + 1);
            child = child.GetNextSibling();
        }
    }
}
...
```

3.10.2 How to insert a new bookmark

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.actions;

// Assuming PDFDoc doc has been loaded.

Bookmark root = doc.GetRootBookmark();
if (root.IsEmpty())
{
    root = doc.CreateRootBookmark();
}
using (Destination dest = Destination.CreateFitPage(doc, 0))
{
    string ws_title = string.Format("A bookmark to a page (index: {0})", 0);

    Bookmark child;
```



```

using (child = root.Insert(ws_title, Bookmark.Position.e_PosLastChild))
{
    child.SetDestination(dest);
    child.SetColor(0xF68C21);
}
}

```

3.10.3 How to create a table of contents based on bookmark information in PDFs

```

using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.actions;

static void AddTOCToPDF(PDFDoc doc)
{
    //Set the table of contents configuration.
    using (var intarray = new Int32Array())
    {
        int depth = doc.GetBookmarkLevelDepth();
        if (depth > 0)
        {
            for (int i = 1; i <= depth; i++)
            {
                intarray.Add(i);
            }
        }
        string title = "";
        using (var toc_config = new TableOfContentsConfig(title, intarray, true, false))
        {
            //Add the table of contents
            doc.AddTableOfContents(toc_config);
        }
    }
}

```

3.11 Form (AcroForm)

PDF currently supports two different forms for gathering information interactively from the user - AcroForms and XFA forms. Acroforms are the original PDF-based fillable forms, based on the PDF architecture. Foxit PDF SDK provides APIs to view and edit form field programmatically. Form fields are commonly used in PDF documents to gather data. The [Form](#) class offers functions to retrieve form fields or form controls, import/export form data and other features, for example:

- To retrieve form fields, please use functions [Form.GetFieldCount](#) and [Form.GetField](#).
- To retrieve form controls from a PDF page, please use functions [Form.GetControlCount](#) and [Form.GetControl](#).

- To import form data from an XML file, please use function [Form.ImportFromXML](#); to export form data to an XML file, please use function [Form.ExportToXML](#).
- To retrieve form filler object, please use function [Form.GetFormFiller](#).

To import form data from a FDF/XFDF file or export such data to a FDF/XFDF file, please refer to functions [pdf.PDFDoc.ImportFromFDF](#) and [pdf.PDFDoc.ExportToFDF](#).

Example:

3.11.1 How to load the forms in a PDF

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.interform;
using foxit.pdf.annots;
...

// Assuming PDFDoc doc has been loaded.

Boolean hasForm = doc.HasForm();
If(hasForm)
    Form form = new Form(doc);
...
```

3.11.2 How to count form fields and get the properties

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.interform;
using foxit.pdf.annots;
...

// Assuming PDFDoc doc has been loaded.

Form form = new Form(doc);
int count = form.GetFieldCount("");
for (int i = 0; i < count; i++)
{
    Field field = form.GetField(i, "");
    Field.Type type = field.GetType();
    WString org_alternateName = field.GetAlternateName();
    field.SetAlternateName("signature");
}
```

3.11.3 How to export the form data in a PDF to a XML file

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.interform;
using foxit.pdf.annots;
...

// Assuming PDFDoc doc has been loaded.

Boolean hasForm = doc.HasForm();
If(hasForm)
    Form form = new Form(doc);
...
form.ExportToXML(XMLFilePath);
...
```

3.11.4 How to import form data from a XML file

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.interform;
using foxit.pdf.annots;
...

// Assuming PDFDoc doc has been loaded.

Boolean hasForm = doc.HasForm();
If(hasForm)
    Form form = new Form(doc);
...
form.ImportFromXML(XMLFilePath);
...
```

3.11.5 How to get and set the properties of form fields

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.interform;
using foxit.pdf.annots;
...

// Assuming PDFDoc doc has been loaded.

Boolean hasForm = doc.HasForm();
If(hasForm)
```

```

Form form = new Form(doc);
Field field = form.GetField(0, "Text Field0");
field.GetAlignment();
field.GetAlternateName();
field.SetAlignment(Alignment.e_AlignmentLeft);
field.SetValue("3");
...

```

3.11.6 How to get coordinates of a form field

1. Load PDF file by PDFDoc.
2. Traverse the form fields of the PDFDoc to get the field object of form.
3. Traverse the form controls of the field object to get the form control object.
4. Get the related widget annotation object by form control.
5. Call the GetRect of the widget annotation object to get the coordinate of the form.

```

using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.interform;
using foxit.pdf.annots;

...
using (PDFDoc doc = new PDFDoc(input_file))
{
    ErrorCode error_code = doc.Load(null);
    if (error_code != ErrorCode.e_ErrSuccess)
    {
        Console.WriteLine("[Failed] Cannot load PDF document: " + input_file + ".\r\nError Code: " + error_code +
"\r\n");
        return;
    }
    if (!doc.HasForm()) return;
    using (Form form = new Form(doc))
    {
        for (int i = 0; i < form.GetFieldCount(null); i++)
        {
            using (Field field = form.GetField(i, null))
            {
                if (field.IsEmpty()) continue;
                for (int j = 0; j < field.GetControlCount(); j++)
                {
                    using (Control control = field.GetControl(j))
                    using (Widget widget = control.GetWidget())
                    //Get rectangle of the annot widget.
                    using (RectF rect = widget.GetRect()){}
                }
            }
        }
    }
}

```

```
}  
...
```

3.12 XFA Form

XFA (XML Forms Architecture) forms are XML-based forms, wrapped inside a PDF. The XML Forms Architecture provides a template-based grammar and a set of processing rules that allow users to build interactive forms. At its simplest, a template-based grammar defines fields in which a user provides data.

Foxit PDF SDK provides APIs to render the XFA form, fill the form, export or import form's data.

Note:

- Foxit PDF SDK provides two callback classes [foxit.addon.xfa.AppProviderCallback](#) and [foxit.addon.xfa.DocProviderCallback](#) to represent the callback objects as an XFA document provider and an XFA application provider respectively. All the functions in those classes are used as callback functions. Pure virtual functions should be implemented by users.
- To use the XFA form feature, please make sure the license key has the permission of the 'XFA' module

Example:

3.12.1 How to load XFADoc and represent an Interactive XFA form

```
using foxit;  
using foxit.common;  
using foxit.common.fxcr;  
using foxit.pdf;  
using foxit.addon;  
using foxit.addon.xfa;  
...  
  
// Implement from AppProviderCallback  
CFS_XFAAppHandler pXFAAppHandler = new CFS_XFAAppHandler();  
Library.RegisterXFAAppProviderCallback(pXFAAppHandler);  
string input_file = input_path + "xfa_dynamic.pdf";  
using (PDFDoc doc = new PDFDoc(input_file))  
{  
    error_code = doc.Load(null);  
    if (error_code != ErrorCode.e_ErrSuccess)  
    {  
        Console.WriteLine("The PDFDoc [{0}] Error: {1}\n", input_file, error_code);  
        Library.Release();  
        return;  
    }  
}
```

```
// Implement from DocProviderCallback
CFS_XFADocHandler pXFADocHandler = new CFS_XFADocHandler();
using (XFADoc xfa_doc = new XFADoc(doc, pXFADocHandler))
{
    ...
}
}
```

3.12.2 How to export and import XFA form data

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.addon;
using foxit.addon.xfa;
...

// Assuming FSXFADoc xfa_doc has been loaded.

...
xfa_doc.ExportData("xfa_form.xml", XFADoc.ExportDataType.e_ExportDataTypeXML);

xfa_doc.ResetForm();
doc.SaveAs("xfa_dynamic_resetform.pdf", (int)foxit.pdf.PDFDoc.SaveFlags.e_SaveFlagNormal);

xfa_doc.ImportData(output_path + "xfa_form.xml");
doc.SaveAs("xfa_dynamic_importdata.pdf", (int)foxit.pdf.PDFDoc.SaveFlags.e_SaveFlagNormal);
...
```

3.13 Form Filler

Form filler is the most commonly used feature for users. Form filler allows applications to fill forms dynamically. The key point for applications to fill forms is to construct some callback functions for PDF SDK to call. To fill the form, please construct a Filler object by current Form object or retrieve the Filler object by function `Form.GetFormFiller` if such object has been constructed. (There should be only one form filler object for an interactive form). For how to fill a form with form filler, you can refer to the view demo "**view_demo**" in the "examples\view_demo" folder of the download package.

3.14 Form Design

Fillable PDF forms (AcroForm) are especially convenient for preparation of various applications, such as taxes and other government forms. Form design provides APIs to add or remove form fields (Acroform) to or from a PDF file. Designing a form from scratch allows developers to create the exact content and layout of the form they want.

Example:

3.14.1 How to add a text form field to a PDF

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.interform;
using foxit.pdf.annots;
using foxit.pdf.actions;
...

// Assuming PDFDoc doc has been loaded.

Control control = form.AddControl(page, "Text Field0", Field.Type.e_TypeTextField, new RectF(50f, 600f, 90f, 640f));
...
```

3.14.2 How to remove a text form field from a PDF

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.interform;
using foxit.pdf.annots;
using foxit.pdf.actions;
...

// Assuming PDFDoc doc has been loaded.

Field field = form.GetField(0, "Text Field0");
form.RemoveField(field);
.....
```

3.15 Annotations

3.15.1 General

An annotation associates an object such as note, line, and highlight with a location on a page of a PDF document. It provides a way to interact with users by means of the mouse and keyboard. PDF includes a wide variety of standard annotation types as listed in Table 3-1. Among these annotation types, many of them are defined as markup annotations for they are used primarily to mark up PDF documents. These annotations have text that appears as part of the annotation and may be displayed in other ways by a conforming reader, such as in a Comments pane. The 'Markup' column Table 3-1 shows whether an annotation is a markup annotation.

Foxit PDF SDK supports most annotation types defined in PDF reference [1]. PDF SDK provides APIs of annotation creation, properties access and modification, appearance setting and drawing.

Table 3-1

Annotation type	Description	Markup	Supported by SDK
Text(Note)	Text annotation	Yes	Yes
Link	Link Annotations	No	Yes
FreeText (TypeWriter/TextBox/Callout)	Free text annotation	Yes	Yes
Line	Line annotation	Yes	Yes
Square	Square annotation	Yes	Yes
Circle	Circle annotation	Yes	Yes
Polygon	Polygon annotation	Yes	Yes
PolyLine	PolyLine annotation	Yes	Yes
Highlight	Highlight annotation	Yes	Yes
Underline	Underline annotation	Yes	Yes
Squiggly	Squiggly annotation	Yes	Yes
StrikeOut	StrikeOut annotation	Yes	Yes
Stamp	Stamp annotation	Yes	Yes
Caret	Caret annotation	Yes	Yes
Ink(pencil)	Ink annotation	Yes	Yes
Popup	Popup annotation	No	Yes
File Attachment	FileAttachment annotation	Yes	Yes
Sound	Sound annotation	Yes	No
Movie	Movie annotation	No	No
Widget*	Widget annotation	No	Yes
Screen	Screen annotation	No	Yes
PrinterMark	PrinterMark annotation	No	No
TrapNet	Trap network annotation	No	No
Watermark*	Watermark annotation	No	Yes
3D	3D annotation	No	No
Redact	Redact annotation	Yes	Yes

Note:

1. The annotation types of widget and watermark are special. They aren't supported in the module of 'Annotation'. The type of widget is only used in the module of 'form filler' and the type of watermark only in the module of 'watermark'.
2. Foxit SDK supports a customized annotation type called PSI (pressure sensitive ink) annotation that is not described in PDF reference [1]. Usually, PSI is for handwriting features and Foxit SDK treats it as PSI annotation so that it can be handled by other PDF products.

Example:

3.15.1.1 How to add a link annotation to a PDF page

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.graphics;
using foxit.pdf.annots;
using foxit.pdf.actions;
...

// Assuming PDFPage page has been loaded and parsed.

Annot annot = page.AddAnnot(Annot.Type.e_Link, new RectF(350, 350, 380, 400))
Link link = new Link(annot);
link.SetHighlightingMode(Annot.HighlightingMode.e_HighlightingToggle);

// Appearance should be reset.
link.ResetAppearanceStream();
...
```

3.15.1.2 How to add a highlight annotation to a page and set the related annotation properties

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.graphics;
using foxit.pdf.annots;
using foxit.pdf.actions;
...

// Assuming PDFPage page has been loaded and parsed.

// Add highlight annotation.
Annot annot = page.AddAnnot(Annot.Type.e_Highlight, new RectF(10, 450, 100, 550));
Highlight highlight = new Highlight(annot);
highlight.SetContent("Highlight");
QuadPoints quad_points = new QuadPoints();
quad_points.first = new foxit.common.fxcr.PointF(10, 500);
quad_points.second = new foxit.common.fxcr.PointF(90, 500);
```

```
quad_points.third = new foxit.common.fxcrf.PointF(10, 480);
quad_points.fourth = new foxit.common.fxcrf.PointF(90, 480);
QuadPointsArray quad_points_array = new QuadPointsArray();
quad_points_array.Add(quad_points);
highlight.SetQuadPoints(quad_points_array);
highlight.SetSubject("Highlight");
highlight.SetTitle("Foxit SDK");
highlight.SetCreationDateTime(GetLocalDateTime());
highlight.SetModifiedDateTime(GetLocalDateTime());
highlight.SetUniqueID(RandomUID());

// Appearance should be reset.
highlight.ResetAppearanceStream();
...
```

3.15.1.3 How to set the popup information when creating markup annotations

```
using foxit;
using foxit.common;
using foxit.common.fxcrf;
using foxit.pdf;
using foxit.pdf.graphics;
using foxit.pdf.annots;
using foxit.pdf.actions;
...

// Assuming PDFPage page has been loaded and parsed.
// Assuming the annots in the page have been loaded.

// Create a new note annot and set the properties for it.
Annot annot = page.AddAnnot(Annot.Type.e_Note, new RectF(10, 350, 50, 400));
Note note = new Note(annot);
note.SetIconName("Comment");
note.SetSubject("Note");
note.SetTitle("Foxit SDK");
note.SetContent("Note annotation.");
note.SetCreationDateTime(GetLocalDateTime());
note.SetModifiedDateTime(GetLocalDateTime());
note.SetUniqueID(RandomUID());

// Add popup to note annotation.
Annot annot_popup = page.AddAnnot(Annot.Type.e_Popup, new RectF(300, 450, 500, 550));
Popup popup = new Popup(annot);
popup.SetBorderColor(0x00FF00);
popup.SetOpenStatus(false);
popup.SetModifiedDateTime(GetLocalDateTime());
note.SetPopup(popup);

// Appearance should be reset.
note.ResetAppearanceStream();
...
```

3.15.1.4 How to get a specific annotation in a PDF using device coordinates

```
using foxit;
using foxit.common;
using foxit.pdf;
using foxit.pdf.graphics;
using foxit.pdf.annots;
...

// Assuming PDFDoc doc has been loaded.
// Assuming PDFPage page has been loaded and parsed.
...

int width = (int)page.GetWidth();
int height = (int)page.GetHeight();

Matrix2D matrix = page.GetDisplayMatrix(0, 0, width, height, page.GetRotation());

// Assuming PointF point has been got.

float tolerance = 3.0f;

Annot annot = page.GetAnnotAtDevicePoint(point, tolerance, matrix);
...
```

3.15.1.5 How to extract the texts under text markup annotations

```
using foxit.common;
using foxit.pdf;
using foxit.pdf.annots;
...

// Assuming PDFDoc doc has been loaded.
...

using (var page = doc.GetPage(0))
{
    // Parse the first page.
    page.StartParse((int)PDFPage.ParseFlags.e_ParsePageNormal, null, false);
    // Get a TextPage object.
    using (var text_page = new TextPage(page, (int)TextPage.TextParseFlags.e_ParseTextNormal))
    {
        int annot_count = page.GetAnnotCount();
        for (int i = 0; i < annot_count; i++)
        {
            Annot annot = page.GetAnnot(i);
            TextMarkup text_markup = new TextMarkup(annot);
            if (!text_markup.IsEmpty())
            {
                // Get the texts which intersect with a text markup annotation.
                string text = text_page.GetTextUnderAnnot(text_markup);
            }
        }
    }
}
```

```
}
```

3.15.1.6 How to add richtext for freetext annotation

```
using foxit.common;
using foxit.pdf;
using foxit.pdf.annots;

// Make sure that SDK has already been initialized successfully.
// Load a PDF document, get a PDF page and parse it.

// Add a new freetext annotation, as text box.
FreeText freetext = null;
Annot annot = null;
using (annot = pdf_page.AddAnnot(Annot.Type.e_FreeText, new RectF(50, 50, 150, 100)))
using (freetext = new FreeText(annot))
{
    // Set annotation's properties.

    // Add/insert richtext string with style.
    using (RichTextStyle richtext_style = new RichTextStyle())
    {
        {
            String font_name = "Times New Roman";
            using (richtext_style.font = new foxit.common.Font(font_name, 0,
foxit.common.Font.Charset.e_CharsetANSI, 0))
            {
                richtext_style.text_color = 0xFF0000;
                richtext_style.text_size = 10;
                freetext.AddRichText("Textbox annotation ", richtext_style);

                richtext_style.text_color = 0x00FF00;
                richtext_style.is_underline = true;
                freetext.AddRichText("1-underline ", richtext_style);
            }
        }
        {
            String font_name = "Calibri";
            using (richtext_style.font = new foxit.common.Font(font_name, 0,
foxit.common.Font.Charset.e_CharsetANSI, 0))
            {
                richtext_style.text_color = 0x0000FF;
                richtext_style.is_underline = false;
                richtext_style.is_strikethrough = true;
                int richtext_count = freetext.GetRichTextCount();
                freetext.InsertRichText(richtext_count - 1, "2_strikethrough ", richtext_style);
            }
        }
    }
}

// Appearance should be reset.
freetext.resetAppearanceStream();
}
```

3.15.2 Import annotations from or export annotations to a FDF file

In Foxit PDF SDK, annotations can be created with data not only from applications but also from FDF files. At the same time, PDF SDK supports to export annotations to FDF files.

Example:

3.15.2.1 How to load annotations from a FDF file and add them into the first page of a given PDF

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

// Assuming PDFDoc doc has been loaded.
...

string fdf_file = "The FDF file path";
foxit.fdf.FDFDoc fdf_doc = new foxit.fdf.FDFDoc(fdf_file);
pdf_doc.ImportFromFDF(fdf_doc, (int)foxit.pdf.PDFDoc.DataType.e_Annots, new Range());
...
```

3.16 Image Conversion

Foxit PDF SDK provides APIs for conversion between PDF files and images. Applications could easily fulfill functionalities like image creation and image conversion which supports the following image formats: BMP, TIFF, PNG, JPX, JPEG, and GIF. Foxit PDF SDK can make the conversion between PDF files and the supported image formats except for GIF. It only supports converting GIF images to PDF files.

Example:

3.16.1 How to convert PDF pages to bitmap files

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

// Assuming PDFDoc doc has been loaded.
...

Image image = new Image();

// Get page count
int nPageCount = doc.GetPageCount();
for(int i=0;i<nPageCount;i++)
{
    using (PDFPage page = doc.GetPage(i))
```

```
{
    // Parse page.
    page.StartParse((int)foxit.pdf.PDFPage.ParseFlags.e_ParsePageNormal, null, false);

    int width = (int)(page.GetWidth());
    int height = (int)(page.GetHeight());
    Matrix2D matrix = page.GetDisplayMatrix(0, 0, width, height, page.GetRotation());

    // Prepare a bitmap for rendering.
    foxit.common.Bitmap bitmap = new foxit.common.Bitmap(width, height,
foxit.common.Bitmap.DIBFormat.e_DIBArgb, System.IntPtr.Zero, 0);
    bitmap.FillRect(0xFFFFFFFF, null);

    // Render page
    Renderer render = new Renderer(bitmap, false);
    render.StartRender(page, matrix, null);
    image.AddFrame(bitmap);
}
}
```

Note: For pdf2image functionality, if the PDF file contains images larger than 1G, it is recommended to process the images using tiled rendering. Otherwise, it may occur exceptions. Following is a brief implementation of tiled rendering.

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

page.StartParse((int)foxit.pdf.PDFPage.ParseFlags.e_ParsePageNormal, null, false);

int width = (int)(page.GetWidth());
int height = (int)(page.GetHeight());

int render_sum = 10;
int width_scale = 1;
int height_scale = 1;
int little_width = width * width_scale;
int little_height = height / render_sum * height_scale;

for (int i = 0; i < render_sum; i++)
{
    // According to Matrix, do module rendering for large PDF files.
    Matrix2D matrix = page.GetDisplayMatrix(0, -1 * i * little_height, little_width, height * height_scale,
page.GetRotation());

    // Prepare a bitmap for rendering.
    foxit.common.Bitmap bitmap = new foxit.common.Bitmap(little_width, little_height,
foxit.common.Bitmap.DIBFormat.e_DIBArgb, System.IntPtr.Zero, 0);
```

```
bitmap.FillRect(0xFFFFFFFF, null);
Renderer render = new Renderer(bitmap, false);
render.StartRender(page, matrix, null);
// The bitmap data will be added to the end of image file after rendering.
...
matrix.Dispose();
draw.Dispose();
render.Dispose();
}
```

3.16.2 How to convert an image file to PDF file

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

// Assuming PDFDoc doc has been loaded.
...
Image image = new Image(input_file);
int count = image.GetFrameCount();

for (int i = 0; i < count; i++) {
    PDFPage page = doc.InsertPage(i, PDFPage.Size.e_SizeLetter);
    page.StartParse((int)PDFPage.ParseFlags.e_ParsePageNormal, null, false);

    // Add image to page
    page.AddImage(image, i, new PointF(0, 0), page.GetWidth(), page.GetHeight(), true);
}

doc.SaveAs(output_file, (int)PDFDoc.SaveFlags.e_SaveFlagNoOriginal);
...
```

3.17 Watermark

Watermark is a type of PDF annotation and is widely used in PDF document. Watermark is a visible embedded overlay on a document consisting of text, a logo, or a copyright notice. The purpose of a watermark is to identify the work and discourage its unauthorized use. Foxit PDF SDK provides APIs to work with watermark, allowing applications to create, insert, release and remove watermarks.

Example:

3.17.1 How to create a text watermark and insert it into the first page

```
using foxit.common;
using foxit.pdf;
...

// Assuming PDFDoc doc has been loaded.
```

```
WatermarkSettings settings = new WatermarkSettings();
settings.offset_x = 0;
settings.offset_y = 0;
settings.opacity = 90;
settings.position = Position.e_PosTopRight;
settings.rotation = -45.0f;
settings.scale_x = 1.0f;
settings.scale_y = 1.0f;

WatermarkTextProperties text_properties = new WatermarkTextProperties();
text_properties.alignment = Alignment.e_AlignmentCenter;
text_properties.color = 0xF68C21;
text_properties.font_style = WatermarkTextProperties.FontStyle.e_FontStyleNormal;
text_properties.line_space = 1;
text_properties.font_size = 12.0f;
text_properties.font = font;

Watermark watermark = new Watermark(doc, "Foxit PDF SDK\nwww.foxitsoftware.com", text_properties,
settings);
watermark.InsertToPage(doc.GetPage(0));

// Save document to file
...
```

3.17.2 How to create an image watermark and insert it into the first page

```
using foxit.common;
using foxit.pdf;
...

// Assuming PDFDoc doc has been loaded.
// Assuming PDFPage page has been loaded and parsed.

WatermarkSettings settings = new WatermarkSettings();
settings.flags = (int)(WatermarkSettings.Flags.e_FlagASPageContents | WatermarkSettings.Flags.e_FlagOnTop);
settings.offset_x = 0.0f;
settings.offset_y = 0.0f;
settings.opacity = 20;
settings.position = Position.e_PosCenter;
settings.rotation = 0.0f;

Image image = new Image(image_file);
foxit.common.Bitmap bitmap = image.GetFrameBitmap(0);

settings.scale_x = page.GetWidth() * 0.618f / bitmap.Width;
settings.scale_y = settings.scale_x;

Watermark watermark = new Watermark(doc, image, 0, settings);
watermark.InsertToPage(doc.GetPage(0));

// Save document to file.
...
```


3.17.3 How to remove all watermarks from a page

```
using foxit.common;
using foxit.pdf;
...

// Assuming PDFPage page has been loaded and parsed.
...
page.RemoveAllWatermarks();
...
// Save document to file
...
```

3.18 Barcode

A barcode is an optical machine-readable representation of data relating to the object to which it is attached. Originally barcodes systematically represented data by varying the widths and spacing of parallel lines, and may be referred to as linear or one-dimensional (1D). Later they evolved into rectangles, dots, hexagons and other geometric patterns in two dimensions (2D). Although 2D systems use a variety of symbols, they are generally referred to as barcodes as well. Barcodes originally were scanned by special optical scanners called barcode readers. Later, scanners and interpretive software became available on devices including desktop printers and smartphones. Foxit PDF SDK provides applications to generate a barcode bitmap from a given string. The barcode types that Foxit PDF SDK supports are listed in Table 3-2.

Table 3-2

Barcode Type	Code39	Code128	EAN 8	UPC A	EAN13	ITF	PDF417	QR
Dimension	1D	1D	1D	1D	1D	1D	2D	2D

Example:

3.18.1 How to generate a barcode bitmap from a string

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
...

// Strings used as barcode content.
String sz_code_str = "TEST-SHEET";

// Barcode format types.
Barcode.Format sz_code_format = Barcode.Format.e_FormatCode39;

//Format error correction level of QR code.
```

```
Barcode.QRErrorCorrectionLevel qr_level = Barcode.QRErrorCorrectionLevel.e_QRCorrectionLevelLow;

//Image names for the saved image files for QR code.
String sz_bmp_qr_name = "/QR_CODE_TestForBarcodeQrCode_L.bmp";

// Unit width for barcode in pixels, preferred value is 1-5 pixels.
int unit_width = 2;

// Unit height for barcode in pixels, preferred value is >= 20 pixels.
int unit_height = 120;

Barcode barcode;
Barcode barcode = new Barcode();

foxit.common.Bitmap bitmap = barcode.GenerateBitmap(sz_code_str, sz_code_format, unit_width, unit_height,
qr_level);
...
```

3.19 Security

Foxit PDF SDK provides a range of encryption and decryption functions to meet different level of document security protection. Users can use regular password encryption and certificate-driven encryption, or using their own security handler for custom security implementation. It also provides APIs to integrate with the third-party security mechanism (Microsoft RMS). These APIs allow developers to work with the Microsoft RMS SDK to both encrypt (protect) and decrypt (unprotect) PDF documents.

Note: For more detailed information about the RMS encryption and decryption, please refer to the simple demo "**security**" in the "examples\simple_demo" folder of the download package.

Example:

3.19.1 How to encrypt a PDF file with user password "123" and owner password "456"

```
using foxit.common;
using foxit.pdf;

...
using (var handler = new StdSecurityHandler())
{
    using (var encrypt_data = new StdEncryptData(true, -4, SecurityHandler.CipherType.e_CipherAES, 16))
    {
        handler.Initialize(encrypt_data, "123", "456");
        doc.SetSecurityHandler(handler);

        doc.SaveAs(output_file, (int)PDFDoc.SaveFlags.e_SaveFlagNormal);
    }
}
...
```

3.19.2 How to encrypt a PDF file with Certificate

```
using foxit.common;
using foxit.pdf;

...
PDFDoc doc = new PDFDoc(input_file);
ErrorCode error_code = doc.Load(null);
if (error_code != ErrorCode.e_ErrSuccess){
    return;
}

// Do encryption.
string cert_file_path = input_path + "foxit.cer";

var cms = new EnvelopedCms(new ContentInfo(seed));
cms.ContentEncryptionAlgorithm.Oid.Value = "1.2.840.113549.3.4";
cms.Encrypt(new CmsRecipient(new X509Certificate2(cert_file_path)));
byte[] bytes = cms.Encode();

byte[] data = new byte[20 + bytes.Length];
Array.Copy(seed, 0, data, 0, 20);
Array.Copy(bytes, 0, data, 20, bytes.Length);
SHA1 sha1 = new SHA1CryptoServiceProvider();
byte[] initial_key = new byte[16];
Array.Copy(sha1.ComputeHash(data), initial_key, initial_key.Length);

byte[][] bytes_array = new byte[1][];
bytes_array[0] = bytes;
var handler = new CertificateSecurityHandler()
var encrypt_data = new CertificateEncryptData()
encrypt_data.Set(true, SecurityHandler.CipherType.e_CipherAES, bytes_array);
handler.Initialize(encrypt_data, initial_key);

doc.SetSecurityHandler(handler);
doc.SaveAs(output_file, (int)PDFDoc.SaveFlags.e_SaveFlagNormal);
...
```

3.19.3 How to encrypt a PDF file with Foxit DRM

```
using foxit.common;
using foxit.pdf;

...
PDFDoc doc = new PDFDoc(input_file);
ErrorCode error_code = doc.Load(null);
if (error_code != ErrorCode.e_ErrSuccess){
    return;
}

// Do encryption.
var handler = new DRMSecurityHandler();
var encrypt_data = new DRMEncryptData(true, "Simple-DRM-filter", SecurityHandler.CipherType.e_CipherAES,
16, true, -4);
```

```
string file_id = "Simple-DRM-file-ID";
string initialize_key = "Simple-DRM-initialize-key";
handler.Initialize(encrypt_data, file_id, initialize_key);
doc.SetSecurityHandler(handler);
doc.SaveAs(output_file, (int)PDFDoc.SaveFlags.e_SaveFlagNormal);
...
```

3.20 Reflow

Reflow is a function that rearranges page content when the page size changes. It is useful for applications that have output devices with difference sizes. Reflow frees the applications from considering layout for different devices. This function provides APIs to create, render, release and access properties of 'reflow' pages.

Example:

3.20.1 How to create a reflow page and render it to a bmp file.

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
...

// Assuming PDFDoc doc has been loaded.

PDFPage page = doc.GetPage(0);

// Parse PDF page.
page.StartParse((int)foxit.pdf.PDFPage.ParseFlags.e_ParsePageNormal, null, false);

ReflowPage reflow_page = new ReflowPage(page);

// Set some arguments used for parsing the reflow page.
reflow_page.SetLineSpace(0);
reflow_page.SetZoom(100);
reflow_page.SetParseFlags((int)ReflowPage.Flags.e_WithImage);

// Parse reflow page.
reflow_page.StartParse(null);

// Get actual size of content of reflow page. The content size does not contain the margin.
float content_width = reflow_page.GetContentWidth();
float content_height = reflow_page.GetContentHeight();

// Assuming Bitmap bitmap has been created.

// Render reflow page.
```

```
Renderer renderer = new Renderer(bitmap, false);
Matrix2D matrix = reflow_page.GetDisplayMatrix(0, 0);
renderer.StartRenderReflowPage(reflow_page, matrix, null);
...
```

3.21 Asynchronous PDF

Asynchronous PDF technique is a way to access PDF pages without loading the whole document when it takes a long time. It's especially designed for accessing PDF files on internet. With asynchronous PDF technique, applications do not have to wait for the whole PDF file to be downloaded before accessing it. Applications can open any page when the data of that page is available. It provides a convenient and efficient way for web reading applications. For how to open and parse pages with asynchronous mode, you can refer to the simple demo "**async_load**" in the "examples\simple_demo" folder of the download package.

3.22 Pressure Sensitive Ink

Pressure Sensitive Ink (PSI) is a technique to obtain varying electrical outputs in response to varying pressure or force applied across a layer of pressure sensitive devices. In PDF, PSI is usually used for hand writing signatures. PSI data are collected by touching screens or handwriting on boards. PSI data contains coordinates and canvas of the operating area which can be used to generate appearance of PSI. Foxit PDF SDK allows applications to create PSI, access properties, operate on ink and canvas, and release PSI.

Example:

3.22.1 How to create a PSI and set the related properties for it

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.annots;
...

PSI psi = new PSI(480, 180, true);

// Set ink diameter.
psi.SetDiameter(9);

// Set ink color.
psi.SetColor(0x434236);

// Set ink opacity.
psi.SetOpacity(0.8f);
```

```
// Add points to pressure sensitive ink.
float x = 121.3043f;
float y = 326.6846f;
float pressure = 0.0966f;
Path.PointType type = Path.PointType.e_TypeMoveTo;
foxit.common.fxcrf.PointF pt = new foxit.common.fxcrf.PointF(x, y);
psi.AddPoint(pt, type, pressure);
...
```

3.23 Wrapper

Wrapper provides a way for users to save their own data related to a PDF document. For example, when opening an encrypted unauthorized PDF document, users may get an error message. In this case, users can still access wrapper data even when they do not have permissions to the PDF content. The wrapper data could be used to provide information like where to get decryption method of this document.

Example:

3.23.1 How to open a document including wrapper data.

```
using foxit;
using foxit.common;
using foxit.common.fxcrf;
using foxit.pdf;
using foxit.pdf.graphics;
using foxit.pdf.objects;

// Assuming PDFDoc doc has been loaded.

// file_name is PDF document which includes wrapper data.
PDFDoc doc = new PDFDoc(file_name);
ErrorCode code = doc.Load(null);
if (code != ErrorCode.e_ErrSuccess)
{
    return;
}
if (!doc.IsWrapper())
{
    return;
}

long offset = doc.GetWrapperOffset();
FileReader file_reader = new FileReader(offset);
file_reader.LoadFile(file_name);
...
```

3.24 PDF Objects

There are eight types of objects in PDF: Boolean object, numerical object, string object, name object, array object, dictionary object, stream object and null object. PDF objects are document level objects that are different from page objects (see 3.25) which are associated with a specific page each. Foxit PDF SDK provides APIs to create, modify, retrieve and delete these objects in a document.

Example:

3.24.1 How to remove some properties from catalog dictionary

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.graphics;
using foxit.pdf.objects;
...

// Assuming PDFDoc doc has been loaded.

PDFDictionary doc_catalog_dict = doc.GetCatalog();
String[] key_strings = { "Type", "Boolean", "Name", "String", "Array", "Dict" };
int count = key_strings.Length;
for (int i = 0; i < count; i++)
{
    if (catalog.HasKey(key_strings[i]))
    {
        catalog.RemoveAt(key_strings[i]);
    }
}
...
```

3.25 Page Object

Page object is a feature that allows novice users having limited knowledge of PDF objects (see 3.24 for details of PDF objects) to be able to work with text, path, image, and canvas objects. Foxit PDF SDK provides APIs to add and delete PDF objects in a page and set specific attributes. Using page object, users can create PDF page from object contents. Other possible usages of page object include adding headers and footers to PDF documents, adding an image logo to each page, or generating a template PDF on demand.

Example:

3.25.1 How to create a text object in a PDF page

```
using foxit.common;
using foxit.pdf;
using foxit.pdf.graphics;
using foxit.common.fxcr;
...

// Assuming PDFPage page has been loaded and parsed.

long position = page.GetLastGraphicsObjectPosition(GraphicsObject.Type.e_TypeText);
TextObject text_object = TextObject.Create();
text_object.SetFillColor(0xFFFF7F00);

// Prepare text state.
TextState state = new TextState();
Font font = new Font("SimSun", (int)Font.Styles.e_StylesSmallCap, Font.Charset.e_CharsetGB2312, 0);
state.font_size = 80.0f;
state.font = font;
state.textmode = TextState.Mode.e_ModeFill;
text_object.SetTextState(page, state, false, 750);

// Set text.
text_object.SetText("Foxit Software");
long last_position = page.InsertGraphicsObject(position, text_object);
...
```

3.25.2 How to add an image logo to a PDF page

```
using foxit.common;
using foxit.pdf;
using foxit.pdf.graphics;
using foxit.common.fxcr;
...

// Assuming PDFPage page has been loaded and parsed.

long position = page.GetLastGraphicsObjectPosition(GraphicsObject.Type.e_TypeImage);
Image image = new Image(image_file);
ImageObject image_object = ImageObject.Create(page.GetDocument());
image_object.SetImage(image, 0);

float width = image.GetWidth();
float height = image.GetHeight();
float page_width = page.GetWidth();
float page_height = page.GetHeight();

image_object.SetMatrix(new Matrix2D(width, 0, 0, height, (page_width - width) / 2.0f, (page_height - height) / 2.0f));
page.InsertGraphicsObject(position, image_object);
page.GenerateContent();
...
```


3.26 Marked content

In PDF document, a portion of content can be marked as marked content element. Marked content helps to organize the logical structure information in a PDF document and enables stylized tagged PDF. Tagged PDF has a standard structure types and attributes that allow page content to be extracted and reused for other purposes. More details about marked content could be found in chapter 10.5 of PDF reference 1.7 ^[1].

Example:

3.26.1 How to get marked content in a page and get the tag name

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.pdf.graphics;
using foxit.pdf.objects;

...
// Assuming PDFPage page has been loaded and parsed.

long position = page.GetFirstGraphicsObjectPosition(GraphicsObject.Type.e_TypeText);
GraphicsObject text_obj = page.GetGraphicsObject(position);
MarkedContent content = text_obj.GetMarkedContent();

int nCount = content.GetItemCount();
// Get marked content property
for (int i = 0; i < nCount; i++)
{
    String tag_name = content.GetItemTagName(i);
    int mcid = content.GetItemMCID(i);
}
...
```

3.27 Layer

PDF Layers, in other words, Optional Content Groups (OCG), are supported in Foxit PDF SDK. Users can selectively view or hide the contents in different layers of a multi-layer PDF document. Multi-layers are widely used in many application domains such as CAD drawings, maps, layered artwork and multi-language document, etc.

In Foxit PDF SDK, a PDF layer is associated with a layer node. To retrieve a layer node, user should construct a PDF [LayerTree](#) object first and then call function [LayerTree.GetRootNode](#) to get the root layer node of the whole layer tree. Furthermore, you can enumerate all the nodes in the layer tree

from the root layer node. Foxit PDF SDK provides APIs to get/set layer data, view or hide the contents in different layers, set layers' name, add or remove layers, and edit layers.

Example:

3.27.1 How to create a PDF layer

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
...
// Assuming PDFDoc doc has been loaded.

LayerTree layertree = new LayerTree(doc);
LayerNode root = layertree.GetRootNode();
...
```

3.27.2 How to set all the layer nodes information

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
...
// Assuming PDFDoc doc has been loaded.

public static void SetAllLayerNodesInformation(LayerNode layer_node)
{
    if (layer_node.HasLayer())
    {
        layer_node.SetDefaultVisible(true);
        layer_node.SetExportUsage(LayerTree.UsageState.e_StateUndefined);
        layer_node.SetViewUsage(LayerTree.UsageState.e_StateOFF);
        LayerPrintData print_data = new LayerPrintData("subtype_print", LayerTree.UsageState.e_StateON);
        layer_node.SetPrintUsage (print_data);
        LayerZoomData zoom_data = new LayerZoomData(1, 10);
        layer_node.SetZoomUsage(zoom_data);
        string new_name = "[View_OFF_Print_ON_Export_Undefined]" + layer_node.GetName();
        layer_node.SetName(new_name);
    }
    int count = layer_node.GetChildrenCount();
    for (int i = 0; i < count; i++)
    {
        using (LayerNode child = layer_node.GetChild(i))
        {
            SetAllLayerNodesInformation(child);
        }
    }
}
```

```
LayerTree layertree = new LayerTree(doc);
LayerNode root = layertree.GetRootNode();
if (root.IsEmpty())
{
    return;
}
SetAllLayerNodesInformation(root);
...
```

3.27.3 How to edit layer tree

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
...
// Assuming PDFDoc doc has been loaded.

LayerTree layertree = new LayerTree(doc);
LayerNode root = layertree.GetRootNode();
int children_count = root.GetChildrenCount();
root.RemoveChild(children_count - 1);
LayerNode child = root.GetChild(children_count - 2);
LayerNode child0 = root.GetChild(0);
child.MoveTo(child0, 0);
child.AddChild(0, "AddedLayerNode", true);
child.AddChild(0, "AddedNode", false);
```

3.28 Signature

PDF Signature module can be used to create and sign digital signatures for PDF documents, which protects the security of documents' contents and avoids it to be tampered maliciously. It can let the receiver make sure that the document is released by the signer and the contents of the document are complete and unchanged. Foxit PDF SDK provides APIs to create digital signature, verify the validity of signature, delete existing digital signature, get and set properties of digital signature, display signature and customize the appearance of the signature form fields.

Note: Foxit PDF SDK provides default Signature handler which supports the following two types of signature filter and subfilter:

(1) filter: Adobe.PPKLite subfilter: adbe.pkcs7.detached

(2) filter: Adobe.PPKLite subfilter: adbe.pkcs7.sha1

If you use one of the above signature filter and subfilter, you can sign a PDF document and verify the validity of signature by default without needing to register a custom callback.

Example:

3.28.1 How to sign the PDF document with a signature

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.IO;
using foxit.common;
using foxit.pdf;
using foxit;
using foxit.pdf.annots;
using foxit.common.fxcr;
using System.Runtime.InteropServices;
using foxit.pdf.interform;

static foxit.common.DateTime GetLocalDateTime()
{
    System.DateTimeOffset rime = System.DateTimeOffset.Now;
    foxit.common.DateTime datetime = new foxit.common.DateTime();
    datetime.year = (UInt16)rime.Year;
    datetime.month = (UInt16)rime.Month;
    datetime.day = (ushort)rime.Day;
    datetime.hour = (UInt16)rime.Hour;
    datetime.minute = (UInt16)rime.Minute;
    datetime.second = (UInt16)rime.Second;
    datetime.utc_hour_offset = (short)rime.Offset.Hours;
    datetime.utc_minute_offset = (ushort)rime.Offset.Minutes;
    return datetime;
}

static Signature AddSignature(PDFPage pdf_page, string sub_filter) {
    float page_height = pdf_page.GetHeight();
    float page_width = pdf_page.GetWidth();
    RectF new_sig_rect = new RectF(0, (float)(page_height*0.9), (float)(page_width*0.4), page_height);
    // Add a new signature to page.
    Signature new_sig = pdf_page.AddSignature(new_sig_rect);
    if (new_sig.IsEmpty()) return null;
    // Set values for the new signature.
    new_sig.SetKeyValue(Signature.KeyName.e_KeyNameSigner, "Foxit PDF SDK");
    String new_value = String.Format("As a sample for subfilter \"{0}\"", sub_filter);
    new_sig.SetKeyValue(Signature.KeyName.e_KeyNameReason, new_value);
    new_sig.SetKeyValue(Signature.KeyName.e_KeyNameContactInfo, "support@foxitsoftware.com");
    new_sig.SetKeyValue(Signature.KeyName.e_KeyNameDN, "CN=CN,MAIL=MAIL@MAIL.COM");
    new_sig.SetKeyValue(Signature.KeyName.e_KeyNameLocation, "Fuzhou, China");
    new_value = String.Format("As a sample for subfilter \"{0}\"", sub_filter);
    new_sig.SetKeyValue(Signature.KeyName.e_KeyNameText, new_value);
    foxit.common.DateTime sign_time = GetLocalDateTime();
    new_sig.SetSignTime(sign_time);
    String image_file_path = input_path + "FoxitLogo.jpg";
    using (Image image = new Image(image_file_path))
    {
        new_sig.SetImage(image, 0);
    }
}
```

```
// Set appearance flags to decide which content would be used in appearance.
int ap_flags = Convert.ToInt32(Signature.APFlags.e_APFlagLabel | Signature.APFlags.e_APFlagSigner |
    Signature.APFlags.e_APFlagReason | Signature.APFlags.e_APFlagDN |
    Signature.APFlags.e_APFlagLocation | Signature.APFlags.e_APFlagText |
    Signature.APFlags.e_APFlagSigningTime | Signature.APFlags.e_APFlagBitmap);
new_sig.SetAppearanceFlags(ap_flags);
}

return new_sig;
}

static void AdobePPKLiteSignature(PDFDoc pdf_doc) {
    string filter = "Adobe.PPKLite";
    string sub_filter = "adbe.pkcs7.detached";

    using (PDFPage pdf_page = pdf_doc.GetPage(0))
    {
        // Add a new signature to first page.
        using (Signature new_signature = AddSignature(pdf_page, sub_filter))
        {
            // Set filter and subfilter for the new signature.
            new_signature.SetFilter(filter);
            new_signature.SetSubFilter(sub_filter);

            // Sign the new signature.
            String signed_pdf_path = output_directory + "signed_newsingature.pdf";

            String cert_file_path = input_path + "foxit_all.pfx";
            byte[] cert_file_password = Encoding.ASCII.GetBytes("123456");
            new_signature.StartSign(cert_file_path, cert_file_password,
                Signature.DigestAlgorithm.e_DigestSHA1, signed_pdf_path, IntPtr.Zero, null);
            Console.WriteLine("[Sign] Finished!");
        }
    }
}

static void Main(String[] args)
{
    ...
    AdobePPKLiteSignature(pdf_doc);
    ...
}
```

3.28.2 How to sign the PDF with a X509 certificate from Windows Certificate Store

To retrieve a certificate from the Windows certificate store and sign a PDF document, you need to implement the **SignatureCallback** of the Foxit PDF SDK. In the callback, retrieve the certificate from the certificate store and return the signature data to the SDK.

```
using System;
using System.Runtime.InteropServices;
```

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using System.Security.Cryptography.X509Certificates;
using System.Security.Cryptography.Pkcs;
using System.Security.Cryptography;
using System.Text;

namespace signatureCS
{
    class SignAndVerifyMsg
    {
        public static X509Certificate2 GetCertificate(string commonName, StoreName storeName)
        {
            X509Certificate2 certificate = null;

            // Look for a certificate in the local machine store.
            var store = new X509Store(storeName, StoreLocation.CurrentUser);
            store.Open(OpenFlags.ReadOnly);
            foreach (var cert in store.Certificates)
            {
                var subjectNames = cert.SubjectName.Name.Split(',');
                foreach (var subjectName in subjectNames)
                {
                    string cn = "CN=" + commonName;
                    if (subjectName.Equals(cn))
                    {
                        certificate = cert;
                        break;
                    }
                }

                if (certificate != null)
                {
                    break;
                }
            }
            return certificate;
        }

        public static bool SignMsg(byte[] to_be_signed_data, string commonName, StoreName storeName, ref
byte[] signed_data)
        {
            X509Certificate2 cert = GetCertificate(commonName, storeName);
            if (cert == null)
            {
                cert = GetCertificate(commonName, StoreName.Root);
            }
            CmsSigner signer = new CmsSigner(cert);
            signer.DigestAlgorithm = new Oid("1.3.14.3.2.26", "sha1");

            signer.IncludeOption = X509IncludeOption.WholeChain;
```

```
ContentInfo signedData = new ContentInfo(to_be_signed_data);
SignedCms cms = new SignedCms(signedData, false);
cms.ComputeSignature(signer);
signed_data = cms.Encode();

return true;
}

public static bool VerifyMsg(byte[] verify_data, byte[] signed_data)
{
    Boolean b = true;
    try
    {
        ContentInfo signedData = new ContentInfo(verify_data);
        SignedCms cms = new SignedCms(signedData, false);
        cms.Decode(signed_data);
        // Check Signature
        cms.CheckSignature(true);
    }
    catch (Exception e)
    {
        Console.WriteLine(e.Message);
        b = false;
    }
    return b;
}

// Used for implementing SignatureCallback.
class DigestContext
{
    public FileReaderCallback file_read_callback_;
    public System.IntPtr byte_range_array_;
    public int byte_range_array_size_;

    public DigestContext(FileReaderCallback file_read_callback, System.IntPtr byte_range_array, int
byte_range_array_size)
    {
        this.file_read_callback_ = file_read_callback;
        this.byte_range_array_ = byte_range_array;
        this.byte_range_array_size_ = byte_range_array_size;
    }
};

// Implementation of pdf::SignatureCallback
class SignatureCallbackImpl : SignatureCallback
{
    private DigestContext digest_context_ = null;
    byte[] arrall = null;

    public SignatureCallbackImpl()
```

```
{
}

public override bool StartCalcDigest(FileReaderCallback file, System.IntPtr byte_range_array, int
size_of_array, Signature signature, IntPtr client_data)
{
    digest_context_ = new DigestContext(file, byte_range_array, size_of_array);
    return true;
}

public override Progressive.State ContinueCalcDigest(IntPtr client_data, PauseCallback pause)
{
    FileReaderCallback filehandler = digest_context_.file_read_callback_;
    int[] int_array = new int[digest_context_.byte_range_array_size_];
    Marshal.Copy(digest_context_.byte_range_array_, int_array, 0, digest_context_.byte_range_array_size_);

    byte[] arr1 = new byte[int_array[1]];
    IntPtr buffer1 = Marshal.AllocHGlobal(int_array[1]);

    filehandler.ReadBlock(buffer1,
        int_array[0],
        (uint)int_array[1]);

    Marshal.Copy(buffer1, arr1, 0, int_array[1]);

    byte[] arr2 = new byte[int_array[3]];
    IntPtr buffer2 = Marshal.AllocHGlobal(int_array[3]);
    filehandler.ReadBlock(buffer2,
        int_array[2],
        (uint)int_array[3]);
    Marshal.Copy(buffer2, arr2, 0, int_array[3]);

    byte[] arrall_temp = new byte[(int)int_array[1]
        + (int)int_array[3]];
    Array.Copy(arr1, 0, arrall_temp, 0, arr1.Length);
    Array.Copy(arr2, 0, arrall_temp, arr1.Length, arr2.Length);

    Marshal.FreeHGlobal(buffer1);
    Marshal.FreeHGlobal(buffer2);

    HashAlgorithm hash = HashAlgorithm.Create("sha1");
    hash.Initialize();
    arrall = hash.ComputeHash(arrall_temp);

    return Progressive.State.e_Finished;
}

public override byte[] GetDigest(IntPtr client_data)
{
    if (arrall != null)
    {
        return arrall;
    }
}
```



```
    }
    return null;
}

public override byte[] Sign(IntPtr digest, int digest_length, string cert_path, byte[] password,
Signature.DigestAlgorithm digest_algorithm, IntPtr client_data)
{
    byte[] byte_digest = new byte[digest_length];
    Marshal.Copy(digest, byte_digest, 0, digest_length);

    byte[] encryptStr = null;
    SignAndVerifyMsg.SignMsg(byte_digest, "test", StoreName.My, ref encryptStr);
    return encryptStr;
}

public override byte[] Sign(IntPtr digest, int digest_length, StreamCallback cert_path, byte[] password,
Signature.DigestAlgorithm digest_algorithm, IntPtr client_data)
{
    return null;
}

public override uint VerifySigState(global::System.IntPtr digest, int digest_length, global::System.IntPtr
signed_data, int signed_data_len, global::System.IntPtr client_data)
{
    byte[] byte_signdata = new byte[signed_data_len];
    Marshal.Copy(signed_data, byte_signdata, 0, signed_data_len);

    byte[] byte_digest = new byte[digest_length];
    Marshal.Copy(digest, byte_digest, 0, digest_length);

    bool verified = SignAndVerifyMsg.VerifyMsg(byte_digest, byte_signdata);

    return verified ? Convert.ToUInt32(Signature.States.e_StateVerifyNoChange) :
Convert.ToUInt32(Signature.States.e_StateVerifyChange);
}

public override void Dispose()
{
}

public override void Release()
{
}

public override bool IsNeedPadData() { return false; }

public override SignatureCallback.CertValidity CheckCertificateValidity(string cert_path, byte[]
cert_password, global::System.IntPtr client_data)
{
    // User can check the validity of input certificate here.
    // If no need to check, just return e_CertValid.
    return SignatureCallback.CertValidity.e_CertValid;
}
```

```

    }
}

class signature
{
    private const string input_path = "../input_files/";
    private const string output_path = "../output_files/pdf2office/";

    static foxit.common.DateTime GetLocalDateTime()
    {
        System.DateTimeOffset rime = System.DateTimeOffset.Now;
        foxit.common.DateTime datetime = new foxit.common.DateTime();
        datetime.year = (UInt16)rime.Year;
        datetime.month = (UInt16)rime.Month;
        datetime.day = (ushort)rime.Day;
        datetime.hour = (UInt16)rime.Hour;
        datetime.minute = (UInt16)rime.Minute;
        datetime.second = (UInt16)rime.Second;
        datetime.utc_hour_offset = (short)rime.Offset.Hours;
        datetime.utc_minute_offset = (ushort)rime.Offset.Minutes;
        return datetime;
    }
    static Signature AddSignature(PDFPage pdf_page, string sub_filter)
    {
        float page_height = pdf_page.GetHeight();
        float page_width = pdf_page.GetWidth();
        RectF new_sig_rect = new RectF(0, (float)(page_height * 0.9), (float)(page_width * 0.4), page_height);
        // Add a new signature to page.
        Signature new_sig = pdf_page.AddSignature(new_sig_rect);
        if (new_sig.IsEmpty()) return null;
        // Set values for the new signature.
        new_sig.SetKeyValue(Signature.KeyName.e_KeyNameSigner, "Foxit PDF SDK");
        String new_value = String.Format("As a sample for subfilter \"{0}\"", sub_filter);
        new_sig.SetKeyValue(Signature.KeyName.e_KeyNameReason, new_value);
        new_sig.SetKeyValue(Signature.KeyName.e_KeyNameContactInfo, "support@foxitsoftware.com");
        new_sig.SetKeyValue(Signature.KeyName.e_KeyNameDN, "CN=CN,MAIL=MAIL@MAIL.COM");
        new_sig.SetKeyValue(Signature.KeyName.e_KeyNameLocation, "Fuzhou, China");
        new_value = String.Format("As a sample for subfilter \"{0}\"", sub_filter);
        new_sig.SetKeyValue(Signature.KeyName.e_KeyNameText, new_value);
        foxit.common.DateTime sign_time = GetLocalDateTime();
        new_sig.SetSignTime(sign_time);
        String image_file_path = input_path + "FoxitLogo.jpg";
        using (Image image = new Image(image_file_path))
        {
            new_sig.SetImage(image, 0);
            // Set appearance flags to decide which content would be used in appearance.
            int ap_flags = Convert.ToInt32(Signature.APFlags.e_APFlagLabel | Signature.APFlags.e_APFlagSigner |
                Signature.APFlags.e_APFlagReason | Signature.APFlags.e_APFlagDN |
                Signature.APFlags.e_APFlagLocation | Signature.APFlags.e_APFlagText |
                Signature.APFlags.e_APFlagSigningTime | Signature.APFlags.e_APFlagBitmap);
            new_sig.SetAppearanceFlags(ap_flags);
        }
    }
}

```

```
        return new_sig;
    }
    static SignatureCallbackImpl sig_callback = new SignatureCallbackImpl();
    static void Main(string[] args)
    {
        System.IO.Directory.CreateDirectory(output_path);
        string sn = " ";
        string key = " ";
        // Initialize library
        ErrorCode error_code = Library.Initialize(sn, key);
        if (error_code != ErrorCode.e_ErrSuccess)
        {
            if (ErrorCode.e_ErrInvalidLicense == error_code)
                Console.WriteLine("[Failed] Current used Foxit PDF Conversion SDK key information is invalid.");
            else
                Console.WriteLine("Library Initialize Error: {0}", error_code);
            return;
        }

        try
        {
            using (PDFDoc pdf_doc = new PDFDoc(input_path + "AboutFoxit.pdf"))
            {
                pdf_doc.StartLoad(null, true, null);
                using (PDFPage pdf_page = pdf_doc.GetPage(0))
                {
                    string filter = "Adobe.PPKLite";

                    string sub_filter = "adbe.pkcs7.sha1";
                    Library.RegisterSignatureCallback(filter, sub_filter, sig_callback);
                    // Add a new signature to first page.
                    using (Signature new_signature = AddSignature(pdf_page, sub_filter))
                    {
                        new_signature.SetFilter(filter);
                        new_signature.SetSubFilter(sub_filter);
                        String signed_pdf_path = output_path + "signed_newsignature.pdf";
                        new_signature.StartSign("", Encoding.ASCII.GetBytes(""),
                            Signature.DigestAlgorithm.e_DigestSHA1, signed_pdf_path, IntPtr.Zero, null);
                    }
                }
            }
        }
        catch (PDFException e)
        {
            switch (e.GetErrorCode())
            {
                case ErrorCode.e_ErrNoPDF2OfficeModuleRight:
                    Console.WriteLine("[Failed] Conversion module is not contained in current Foxit PDF Conversion SDK keys.");
                    break;
                default:
```

```
        Console.WriteLine(e.Message);  
        break;  
    }  
}  
Library.Release();  
}  
}  
}
```

3.29 Long term validation (LTV)

From version 7.0, Foxit PDF SDK provides APIs to establish long term validation (LTV) of signatures, which is mainly used to solve the verification problem of signatures that have already expired. LTV requires DSS (Document Security Store) which contains the verification information of the signatures, as well as DTS (Document Timestamp Signature) which belongs to the type of time stamp signature.

In order to support LTV, Foxit PDF SDK provides:

- Support for adding the signatures of time stamp type, and provides a default signature callback for the subfilter "ETSI.RFC3161".
- TimeStampServerMgr and TimeStampServer classes, which are used to set and manager the server for time stamp. The default signature callback for the subfilter "ETSI.RFC3161" will use the default time stamp server.
- LTVVerifier class which offers the functionalities of verifying signatures and adding DSS information to documents. It also provides a basic default RevocationCallback which is required by LTVVerifier.

Following lists an example about how to establish long term validation of signatures using the default signature callback for subfilter "ETSI.RFC3161" and the default RevocationCallback. For more details, please refer to the simple demo "**ltv**" in the "examples\simple_demo" folder of the download package.

Example:

3.29.1 How to establish long term validation of signatures using the default signature callback for subfilter "ETSI.RFC3161" and the default RevocationCallback

```
using System;  
  
using foxit.common;  
using foxit.pdf;  
using foxit;
```

```
using foxit.common.fxcr;

// Initialize time stamp server manager, add and set a default time stamp server, which will be used by default
signature callback for time stamp signature.
TimeStampServerMgr.Initialize();
using (TimeStampServer timestamp_server = TimeStampServerMgr.AddServer(server_name, server_url,
server_username, server_password))
{
    TimeStampServerMgr.SetDefaultServer(timestamp_server);
    // Assume that "signed_pdf_path" represents a signed PDF document which contains signed signature.
    using (PDFDoc pdf_doc = new PDFDoc(signed_pdf_path))
    {
        pdf_doc.StartLoad(null, true, null);
        // Use LTVVerifier to verify and add DSS.
        using (LTVVerifier ltv_verifier = new LTVVerifier(pdf_doc, true, true, false,
LTVVerifier.TimeType.e_SignatureCreationTime))
        {
            // Set verifying mode which is necessary.
            ltv_verifier.SetVerifyMode(LTVVerifier.VerifyMode.e_VerifyModeAcrobat);
            SignatureVerifyResultArray sig_verify_result_array = ltv_verifier.Verify();
            for (uint i = 0; i < sig_verify_result_array.GetSize(); i++)
            {
                // ltv state would be e_LTVStateNotEnable here.
                SignatureVerifyResult.LTVState ltv_state = sig_verify_result_array.GetAt(i).GetLTVState();
                if ((sig_verify_result_array.GetAt(i).GetSignatureState() &
Convert.ToInt32(Signature.States.e_StateVerifyValid)) > 0)
                {
                    ltv_verifier.AddDSS(sig_verify_result_array.GetAt(i));
                }
                // Add a time stamp signature as DTS and sign it. "saved_ltv_pdf_path" represents the newly saved signed
PDF file.
                using (PDFPage pdf_page = pdf_doc.GetPage(0))
                {
                    // The new time stamp signature will have default filter name "Adobe.PPKLite" and default subfilter name
"ETSI.RFC3161".
                    Signature timestamp_signature = pdf_page.AddSignature(new RectF(), "",
Signature.SignatureType.e_SignatureTypeTimeStamp, true);
                    byte[] empty_byte = Encoding.ASCII.GetBytes("");
                    Progressive sign_progressive = timestamp_signature.StartSign("", empty_byte,
Signature.DigestAlgorithm.e_DigestSHA256,
saved_ltv_pdf_path, IntPtr.Zero, null);
                    if (sign_progressive.GetRateOfProgress() != 100)
                        sign_progressive.Continue();

                    // Then use LTVVerifier to verify the new signed PDF file.
                    using (PDFDoc check_pdf_doc = new PDFDoc(saved_ltv_pdf_path))
                    {
                        check_pdf_doc.StartLoad(null, true, null);
                        // Use LTVVerfier to verify.
                        using (LTVVerifier ltv_verifier = new LTVVerifier(pdf_doc, true, true, false,
LTVVerifier.TimeType.e_SignatureCreationTime))
                        {
                            // Set verifying mode which is necessary.
```

```
lvt_verifier.SetVerifyMode(LTVVerifier.VerifyMode.e_VerifyModeAcrobat);
SignatureVerifyResultArray sig_verify_result_array = lvt_verifier.Verify();
for (uint i = 0; i < sig_verify_result_array.GetSize(); i++)
{
    // lvt state would be e_LTVStateEnable here.
    SignatureVerifyResult.LTVState lvt_state = sig_verify_result_array.GetAt(i).GetLTVState();
    ... // User can get other information from SignatureVerifyResult.
}
}
}
}
}
}
}
// Release time stamp server manager when everything is done.
TimeStampServerMgr.Release();
```

3.30 PAdES

From version 7.0, Foxit PDF SDK also supports PAdES (PDF Advanced Electronic Signature) which is the application for CAdES signature in the field of PDF. CAdES is a new standard for advanced digital signature, its default subfilter is "ETSI.CAdES.detached". PAdES signature includes four levels: B-B, B-T, B-LT, and B-LTA.

- B-B: Must include the basic attributes.
- B-T: Must include document time stamp or signature time stamp to provide trusted time for existing signatures, based on B-B.
- B-LT: Must include DSS/VRI to provide certificates and revocation information, based on B-T.
- B-LTA: Must include the trusted time DTS for existing revocation information, based on B-LT.

Foxit PDF SDK provides a default signature callback for the subfilter "ETSI.CAdES.detached" to sign and verify the signatures (with subfilter "ETSI.CAdES.detached"). It also provides TimeStampServerMgr and TimeStampServer classes to set and manager the server for time stamp. The default signature callback for the subfilter "ETSI.CAdES.detached" will use the default time stamp server.

Foxit PDF SDK provides functions to get the level of PAdES from signature, and application level can also judge and determine the level of PAdES according to the requirements of each level. For more details about how to add, sign and verify a PAdES signature in PDF document, please refer to the simple demo "**pades**" in the "examples\simple_demo" folder of the download package.

3.31 PDF Action

PDF Action is represented as the base PDF action class. Foxit PDF SDK provides APIs to create a series of actions and get the action handlers, such as embedded goto action, JavaScript action, named action and launch action, etc.

Example:

3.31.1 How to create a URI action and insert to a link annot

```
using foxit.common;
using foxit.pdf;
using foxit;
using foxit.pdf.annots;
using foxit.common.fxcr;
using foxit.pdf.annots;
using foxit.pdf.actions;

// Add link annotation
Link link = null;
Annot annot = null;
using (annot = page.AddAnnot(Annot.Type.e_Link, new RectF(350, 350, 380, 400)))
using (link = new Link(annot))
using (PDFDoc doc = page.GetDocument())
{
    foxit.pdf.actions.Action action = null;
    link.SetHighlightingMode(Annot.HighlightingMode.e_HighlightingToggle);

    // Add action for link annotation
    URIAction uriaction = null;
    using (action = foxit.pdf.actions.Action.Create(doc, foxit.pdf.actions.Action.Type.e_TypeGoto))
    using (uriaction = new URIAction(action))
    {
        uriaction.SetTrackPositionFlag(true);
        uriaction.SetURI("www.foxitsoftware.com");
        link.SetAction(uriaction);

        // Appearance should be reset.
        link.ResetAppearanceStream();
    }
}
```

3.31.2 How to create a GoTo action and insert to a link annot

```
using foxit.common;
using foxit.pdf;
using foxit;
using foxit.pdf.annots;
using foxit.common.fxcr;
using foxit.pdf.annots;
using foxit.pdf.actions;
```

```

using foxit.common;
using foxit.pdf;
using foxit;
using foxit.pdf.annots;
using foxit.common.fxcr;
using foxit.pdf.annots;
using foxit.pdf.actions;

Link link = null;
Annot annot = null;
using (annot = page.AddAnnot(Annot.Type.e_Link, new RectF(350, 350, 380, 400)))
using (link = new Link(annot))
using (PDFDoc doc = page.GetDocument())
{
    foxit.pdf.actions.Action action = null;
    link.SetHighlightingMode(Annot.HighlightingMode.e_HighlightingToggle);

    // Add action for link annotation
    GotoAction gotoaction = null;
    using (action = foxit.pdf.actions.Action.Create(doc, foxit.pdf.actions.Action.Type.e_TypeGoto))
    using (gotoaction = new GotoAction(action))
    {
        Destination dest = Destination.CreateXYZ(doc, 0, 0, 0, 0);
        gotoaction.SetDestination(dest);
        link.SetAction(gotoaction);
        // Appearance should be reset.
        link.ResetAppearanceStream();
    }
}

```

3.32 JavaScript

JavaScript was created to offload Web page processing from a server onto a client in Web-based applications. Foxit PDF SDK JavaScript implements extensions, in the form of new objects and their accompanying methods and properties, to the JavaScript language. It enables a developer to manage document security, communicate with a database, handle file attachments, and manipulate a PDF file so that it behaves as an interactive, web-enabled form, and so on.

JavaScript action is an action that causes a script to be compiled and executed by the JavaScript interpreter. Class `foxit.pdf.actions.JavaScriptAction` is derived from `Action` and offers functions to get/set JavaScript action data.

The JavaScript methods and properties supported by Foxit PDF SDK are listed in the [appendix](#).

Example:

3.32.1 How to add JavaScript Action to Document

```
using foxit.pdf.annots;
using foxit.pdf.actions;

// Load Document doc.
...
using (foxit.pdf.actions.Action action = foxit.pdf.actions.Action.Create(doc,
foxit.pdf.actions.Action.Type.e_TypeJavaScript))
using (JavaScriptAction javascript_action = new JavaScriptAction(action))
{
    javascript_action.SetScript("app.alert(\"Hello Foxit \");");
    using (AdditionalAction aa = new AdditionalAction(doc))
    {
        aa.SetAction(AdditionalAction.TriggerEvent.e_TriggerDocWillClose, javascript_action);
        aa.DoJSAction(AdditionalAction.TriggerEvent.e_TriggerDocWillClose);
    }
}
...
```

3.32.2 How to add JavaScript Action to Annotation

```
using foxit.pdf.annots;
using foxit.pdf.actions;
...

// Load Document and get a widget annotation.
...
using (foxit.pdf.actions.Action action = foxit.pdf.actions.Action.Create(page.GetDocument(),
foxit.pdf.actions.Action.Type.e_TypeJavaScript))
using (JavaScriptAction javascript_action = new JavaScriptAction(action))
{
    javascript_action.SetScript("app.alert(\"Hello Foxit \");");
    using (AdditionalAction aa = new AdditionalAction(annot))
    {
        aa.SetAction(AdditionalAction.TriggerEvent.e_TriggerAnnotMouseButtonPressed, javascript_action);
        aa.DoJSAction(AdditionalAction.TriggerEvent.e_TriggerAnnotMouseButtonPressed);
    }
}
...
```

3.32.3 How to add JavaScript Action to FormField

```
using foxit.pdf.interform;
using foxit.pdf.actions;

...

// Load Document and get a form field.
...

// Add text field.
```

```
using (Control control = form.AddControl(page, "Text Field0", Field.Type.e_TypeTextField, new RectF(50f, 600f, 90f, 640f)))
using (Control control1 = form.AddControl(page, "Text Field1", Field.Type.e_TypeTextField, new RectF(100f, 600f, 140f, 640f)))
using (Control control2 = form.AddControl(page, "Text Field2", Field.Type.e_TypeTextField, new RectF(150f, 600f, 190f, 640f)))
using (Field field = control.GetField())
{
    field.SetValue("3");
    // Update text field's appearance.
    using (Widget widget = control.GetWidget())
        widget.ResetAppearanceStream();
    using (Field field1 = control1.GetField())
    {
        field1.SetValue("23");
        // Update text field's appearance.
        using (Widget widget1 = control1.GetWidget())
            widget1.ResetAppearanceStream();

        using (Field field2 = control2.GetField())
        using (PDFDoc doc = form.GetDocument())
        using (foxit.pdf.actions.Action action = foxit.pdf.actions.Action.Create(form.GetDocument(),
foxit.pdf.actions.Action.Type.e_TypeJavaScript))
        using (foxit.pdf.actions.JavaScriptAction javascript_action = new foxit.pdf.actions.JavaScriptAction(action))
        {
            javascript_action.SetScript("AFSimple_Calculate(\"SUM\", new Array (\"Text Field0\", \"Text Field1\");");
            using (AdditionalAction aa = new AdditionalAction(field2))
            {
                aa.SetAction(AdditionalAction.TriggerEvent.e_TriggerFieldRecalculateValue, javascript_action);
                // Update text field's appearance.
                using (Widget widget2 = control2.GetWidget())
                    widget2.ResetAppearanceStream();
            }
        }
    }
}
...
}
```

3.32.4 How to add a new annotation to PDF using JavaScript

```
using foxit.pdf.annots;
using foxit.pdf.actions;
...

// Load Document and get form field, construct a Form object and a Filler object.
...

using (foxit.pdf.actions.Action action = foxit.pdf.actions.Action.Create(form.GetDocument(),
foxit.pdf.actions.Action.Type.e_TypeJavaScript))
using (foxit.pdf.actions.JavaScriptAction javascript_action = new foxit.pdf.actions.JavaScriptAction(action))
{

```

```
javascript_action.SetScript("var annot = this.addAnnot({ page : 0, type : \"Square\", rect : [ 0, 0, 100, 100 ],  
name : \"UniqueID\", author : \"A. C. Robot\", contents : \"This section needs revision.\" });");  
using (AdditionalAction aa = new AdditionalAction(field))  
{  
    aa.SetAction(AdditionalAction.TriggerEvent.e_TriggerAnnotCursorEnter, javascript_action);  
    aa.DoJSAction(AdditionalAction.TriggerEvent.e_TriggerAnnotCursorEnter);  
}  
}  
...
```

3.32.5 How to get/set properties of annotations (strokeColor, fillColor, readOnly, rect, type) using JavaScript

```
using foxit.pdf.annots;  
using foxit.pdf.actions;  
...  
  
// Load Document and get form field, construct a Form object and a Filler object.  
...  
  
using (foxit.pdf.actions.Action action = foxit.pdf.actions.Action.Create(form.GetDocument(),  
foxit.pdf.actions.Action.Type.e_TypeJavaScript))  
  
// Get properties of annotations.  
using (foxit.pdf.actions.JavaScriptAction javascript_action = new foxit.pdf.actions.JavaScriptAction(action))  
{  
    javascript_action.SetScript("var ann = this.getAnnot(0, \"UniqueID\"); if (ann != null) { console.println(\"Found  
it! type: \" + ann.type); console.println(\"readOnly: \" + ann.readOnly); console.println(\"strokeColor: \" +  
ann.strokeColor);console.println(\"fillColor: \" + ann.fillColor); console.println(\"rect: \" + ann.rect);});");  
    using (AdditionalAction aa = new AdditionalAction(field))  
    {  
        aa.SetAction(AdditionalAction.TriggerEvent.e_TriggerAnnotCursorEnter, javascript_action);  
        aa.DoJSAction(AdditionalAction.TriggerEvent.e_TriggerAnnotCursorEnter);  
    }  
}  
  
// Set properties of annotations (only take strokeColor as an example).  
using (foxit.pdf.actions.JavaScriptAction javascript_action1 = new foxit.pdf.actions.JavaScriptAction(action))  
{  
    javascript_action1.SetScript("var ann = this.getAnnot(0, \"UniqueID\");if (ann != null) { ann.strokeColor =  
color.blue; });");  
    using (AdditionalAction aa1 = new AdditionalAction(field1))  
    {  
        aa1.SetAction(AdditionalAction.TriggerEvent.e_TriggerAnnotCursorEnter, javascript_action1);  
        aa1.DoJSAction(AdditionalAction.TriggerEvent.e_TriggerAnnotCursorEnter);  
    }  
}  
...
```

3.32.6 How to destroy annotation using JavaScript

```
using foxit.pdf.annots;
```

```
using foxit.pdf.actions;
...

// Load Document and get form field, construct a Form object and a Filler object.
...

using (foxit.pdf.actions.Action action = foxit.pdf.actions.Action.Create(form.GetDocument(),
foxit.pdf.actions.Action.Type.e_TypeJavaScript))
using (foxit.pdf.actions.JavaScriptAction javascript_action = new foxit.pdf.actions.JavaScriptAction(action))
{
    javascript_action.SetScript("var ann = this.getAnnot(0, \" UniqueID \"); if (ann != null) { ann.destroy(); } ");
    using (AdditionalAction aa = new AdditionalAction(field))
    {
        aa.SetAction(AdditionalAction.TriggerEvent.e_TriggerAnnotCursorEnter, javascript_action);
        aa.DoJSAction(AdditionalAction.TriggerEvent.e_TriggerAnnotCursorEnter);
    }
}
...
```

3.33 Redaction

Redaction is the process of removing sensitive information while keeping the document's layout. It allows users to permanently remove (redact) visible text and images from PDF documents to protect confidential information, such as social security numbers, credit card information, product release dates, and so on.

Redaction is a type of markup annotation, which is used to mark some contents of a PDF file and then the contents will be removed once the redact annotations are applied.

To do Redaction, you can use the following APIs:

- Call function [foxit.addon.Redaction.Redaction](#) to create a redaction module. If module "Redaction" is not defined in the license information which is used in function [common.Library.Initialize](#), it means user has no right in using redaction related functions and this constructor will throw exception [foxit.common.ErrorCode.e_ErrInvalidLicense](#) .
- Then call function [foxit.addon.Redaction.MarkRedactAnnot](#) to create a redaction object and mark page contents (text object, image object, and path object) which are to be redacted.
- Finally call function [foxit.addon.Redaction.Apply](#) to apply redaction in marked areas: remove the text or graphics under marked areas permanently.

Note: To use the redaction feature, please make sure the license key has the permission of the 'Redaction' module

Example:

3.33.1 How to redact the text "PDF" on the first page of a PDF

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.addon;
using foxit.pdf.annots;

...
using (Redaction redaction = new Redaction(doc))
{
    using (PDFPage page = doc.GetPage(0))
    {
        // Parse PDF page.
        page.StartParse((int)foxit.pdf.PDFPage.ParseFlags.e_ParsePageNormal, null, false);
        TextPage text_page = new TextPage(page, (int)foxit.pdf.TextPage.TextParseFlags.e_ParseTextNormal);
        TextSearch text_search = new TextSearch(text_page);
        text_search.SetPattern("PDF");
        RectFArray rect_array = new RectFArray();
        while (text_search.FindNext())
        {
            RectFArray itemArray = text_search.GetMatchRects();
            rect_array.InsertAt(rect_array.GetSize(), itemArray);
        }
        if (rect_array.GetSize() > 0)
        {
            Redact redact = redaction.MarkRedactAnnot(page, rect_array);
            redact.ResetAppearanceStream();
            doc.SaveAs(output_path + "AboutFoxit_redacted_default.pdf",
                (int)foxit.pdf.PDFDoc.SaveFlags.e_SaveFlagNormal);

            // set border color to Green
            redact.SetBorderColor(0x00FF00);
            // set fill color to Blue
            redact.SetFillColor(0x0000FF);
            // set rollover fill color to Red
            redact.SetApplyFillColor(0xFF0000);
            redact.ResetAppearanceStream();
            doc.SaveAs(output_path + "AboutFoxit_redacted_setColor.pdf",
                (int)foxit.pdf.PDFDoc.SaveFlags.e_SaveFlagNormal);

            redact.SetOpacity((float)0.5);
            redact.ResetAppearanceStream();
            doc.SaveAs(output_path + "AboutFoxit_redacted_setOpacity.pdf",
                (int)foxit.pdf.PDFDoc.SaveFlags.e_SaveFlagNormal);

            if (redaction.Apply())
                Console.WriteLine("Redact page(0) succeed.");
            else
                Console.WriteLine("Redact page(0) failed.");
            redact.Dispose();
        }
    }
}
```

```
}  
}  
}
```

3.34 Comparison

Comparison feature lets you see the differences in two versions of a PDF. Foxit PDF SDK provides APIs to compare two PDF documents page by page, the differences between the two documents will be returned.

The differences can be defined into three types: delete, insert and replace. You can save these differences into a PDF file and mark them as annotations.

Note: To use the comparison feature, please make sure the license key has the permission of the 'Comparison' module

Example:

3.34.1 How to compare two PDF documents and save the differences between them into a PDF file

```
using foxit;  
using foxit.common;  
using foxit.common.fxcr;   
using foxit.pdf;  
using foxit.pdf.annots;  
using foxit.addon;  
...  
  
using (PDFDoc base_doc = new PDFDoc("input_base_file"))  
{  
    error_code = base_doc.Load(null);  
    if (error_code != ErrorCode.e_ErrSuccess)  
    {  
        Library.Release();  
        return;  
    }  
  
    using (PDFDoc compared_doc = new PDFDoc("input_compared_file"))  
    {  
        error_code = compared_doc.Load(null);  
        if (error_code != ErrorCode.e_ErrSuccess)  
        {  
            Library.Release();  
            return;  
        }  
  
        using (Comparison comparison = new Comparison(base_doc, compared_doc))  
        {
```

```

// Start comparing.
CompareResults result = comparison.DoCompare(0, 0,
(int)Comparison.CompareType.e_CompareTypeText);
CompareResultInfoArray oldInfo = result.results_base_doc;
CompareResultInfoArray newInfo = result.results_compared_doc;
uint oldInfoSize = oldInfo.GetSize();
uint newInfoSize = newInfo.GetSize();

using (PDFPage page = compared_doc.GetPage(0))
{
    for (uint i = 0; i < newInfoSize; i++)
    {
        CompareResultInfo item = newInfo.GetAt(i);
        CompareResultInfo.CompareResultType type = item.type;
        if (type == CompareResultInfo.CompareResultType.e_CompareResultTypeDeleteText)
        {
            String res_string = String.Format("\{0}\\"", item.diff_contents);
            CreateDeleteTextStamp(page, item.rect_array, 0xff0000, res_string, "Compare : Delete", "Text");
        }
        else if (type == CompareResultInfo.CompareResultType.e_CompareResultTypeInsertText)
        {
            String res_string = String.Format("\{0}\\"", item.diff_contents);
            CreateDeleteText(page, item.rect_array, 0x0000ff, res_string, "Compare : Insert", "Text");
        }
        else if (type == CompareResultInfo.CompareResultType.e_CompareResultTypeReplaceText)
        {
            String res_string = String.Format("[Old]: \{0}\r\n[New]: \{1}\\"", oldInfo.GetAt(i).diff_contents,
item.diff_contents);
            CreateSquigglyRect(page, item.rect_array, 0xe7651a, res_string, "Compare : Replace", "Text");
        }
    }
}

// Save the comparison result to a PDF file.
compared_doc.SaveAs(output_path + "result.pdf", (int)PDFDoc.SaveFlags.e_SaveFlagNormal);
}
}
}

```

Note: for CreateDeleteTextStamp, CreateDeleteText and CreateSquigglyRect functions, please refer to the simple demo "pdfcompare" located in the "examples\simple_demo" folder of the download package.

3.35 OCR

Optical Character Recognition, or OCR, is a software process that enables images or printed text to be translated into machine-readable text. OCR is most commonly used when scanning paper documents to create electronic copies, but can also be performed on existing electronic documents (e.g. PDF).

From version 9.0, Linux x64 platform supports OCR feature, and the OCR engine has been upgraded, please contact Foxit support team or sales team to get the latest engine files package.

This section will provide instructions on how to set up your environment for the OCR feature module using Foxit PDF SDK for .Net.

3.35.1 System requirements

Platform: Windows, Linux (x64)

Programming Language: C, C++, Java, Python, C#, Node.js, Go

License Key requirement: 'OCR' module permission in the license key

SDK Version: Foxit PDF SDK for Windows (C++, Java, C#) 6.4 or higher; Foxit PDF SDK (C) 7.4 or higher; Foxit PDF SDK for Windows (Python) 8.3 or higher; Foxit PDF SDK for Linux x64 (C++, Java, C#, Python) 9.0 or higher; Foxit PDF SDK (Node.js) 10.0 or higher

3.35.2 Trial Limit for SDK OCR Add-on Module

For the trial version, there are three trial limits that you should notice:

1. Allow 30 consecutive natural days to evaluate SDK from the first time of OCR Engine initialization.
2. Allow up to 5000 pages to be converted using OCR from the first time of OCR Engine initialization.
3. Trial watermarks will be generated on the PDF pages. This limit is used for all of the SDK modules.

3.35.3 OCR resource files

Please contact Foxit support team or sales team to get the OCR resource files package.

After getting the package, extract it to a desired directory (for example, extract the package to a directory named "ocr_addon"), and then you can see the resource files for OCR are as follows:

- **debugging_files:** Resource files used for debugging the OCR project. These file(s) cannot be distributed.
- **language_resource_CJK:** Resource files for CJK language, including: Chinese-Simplified, Chinese-Traditional, Japanese, and Korean.
- **language_resources_noCJK:** Resource files for the languages except CJK, including: Basque, Bulgarian, Catalan, Croatian, Czech, Danish, Dutch, English, Estonian, Faeroese, Finnish, French, Galician, German, Greek, Hebrew, Hungarian, Icelandic, Italian, Latvian (Lettish),

Lithuanian, Macedonian, Maltese, Norwegian, Polish, Portuguese, Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkish, Ukrainian.

- **win32_lib**: 32-bit library resource files
- **win64_lib**: 64-bit library resource files
- **readme.txt**: A txt file for introducing the role of each folder in this directory, as well as how to use those resource files for OCR.

3.35.4 How to run the OCR demo

Foxit PDF SDK for .Net provides an OCR demo located in the "examples\simple_demo\ocr" folder to show you how to use Foxit PDF SDK to do OCR for a PDF page or a PDF document.

3.35.4.1 Build an OCR resource directory

Before running the OCR demo, you should first build an OCR resource directory, and then pass the directory to Foxit PDF SDK API **OCREngine.Initialize** to initialize OCR engine.

Note: Starting from version 10.1, Foxit PDF SDK has restructured the **OCREngine.Initialize** interface and added a new parameter, **is_shared_cpu_cores_mode**, to specify whether to use multi-process mode. When this parameter value is true, multi-process mode will be used during the OCR process, and when the value is false, single-process mode will be used.

To build an OCR resource directory, please follow the steps below:

- 1) Create a new folder to add the resources. For example, "D:/ocr_resources".
- 2) Add the appropriate library resource based on the platform architecture.
 - For **win32**, copy **all the files** under "ocr_addon/win32_lib" folder to "D:/ocr_resources".
 - For **win64**, copy **all the files** under "ocr_addon/win64_lib" folder to "D:/ocr_resources".
- 3) Add the language resource.
 - For CJK (Chinese-Simplified, Chinese-Traditional, Japanese, and Korean), copy **all the files** under "ocr_addon/language_resource_CJK" folder to "D:/ocr_resources".
 - For all other languages except CJK, copy **all the files** under "ocr_addon/language_resources_noCJK" folder to "D:/ocr_resources".
 - For all the supported languages, copy **all the files** under "ocr_addon/language_resource_CJK" and "ocr_addon/language_resources_noCJK" folders to "D:/ocr_resources".

4) (Optional) Add debugging file resource if you need to debug the demo.

- For win32, copy the file(s) under "ocr_addon/debugging_files/win32" folder to "D:/ocr_resources".
- For win64, copy the file(s) under "ocr_addon/debugging_files/win64" folder to "D:/ocr_resources".

Note: The debugging files should be exclusively used for testing purposes. So, you cannot distribute them.

3.35.4.2 Configure the demo

After building the OCR resource directory, configure the demo in the "examples\simple_demo\ocr\ocr.cs" file.

Specify the OCR resource directory

Add the OCR resource directory as follows, which will be used to initialize the OCR engine.

```
39 // "ocr_resource_path" is the path of ocr resources. Please refer to Developer Guide for more details.
40 string ocr_resource_path = "D:/ocr_resources";
41
42 if (ocr_resource_path == "")
43 {
44     Console.WriteLine("ocr_resource_path is still empty. Please set it with a valid path to OCR resource path.");
45     return;
46 }
```

Choose the language resource

You will need to set the language used by the OCR engine into the demo code. This is done with the **OCREngine.SetLanguages** method and is set to "English" by default.

```
68 // Set languages.
69 OCREngine.SetLanguages("English");
```


(Optional) Set log for OCREngine

If you want to print the entire log of the OCR Engine, please uncomment the **OCREngine.SetLogFile** method as below:

```
65 // Set log for OCREngine. (This can be opened to set log file if necessary)
66 OCREngine.SetLogFile(output_path+"ocr.log");
```

3.35.4.3 Run the demo

Once you run the demo successfully, the console will print the following by default:

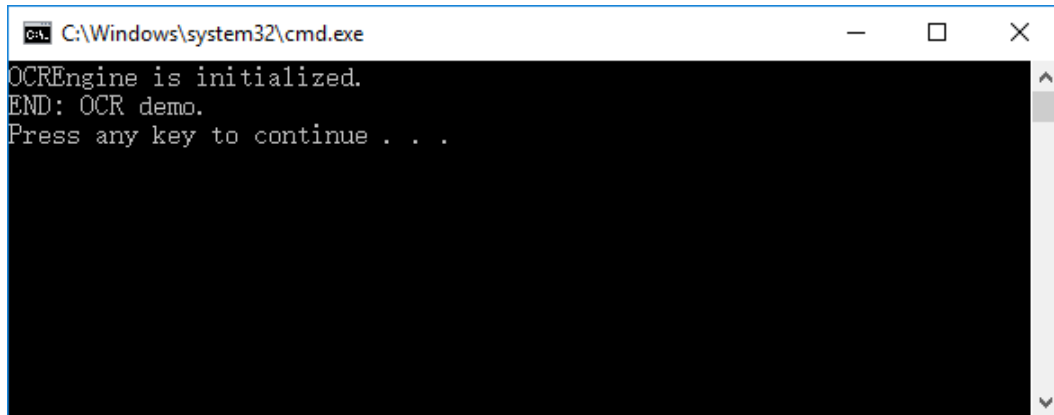

```
C:\Windows\system32\cmd.exe
OCREngine is initialized.
END: OCR demo.
Press any key to continue . . .
```

The demo will OCR the default document ("examples\simple_demo\input_files\ocr\AboutFoxit_ocr.pdf") in four different ways, which will output four different PDFs in the output folder ("examples\simple_demo\output_files\ocr"):

- OCR Editable PDF - ocr_doc_editable.pdf
- OCR Searchable PDF - ocr_doc_searchable.pdf
- OCR Editable PDF Page - ocr_page_editable.pdf
- OCR Searchable PDF Page - ocr_page_searchable.pdf

3.35.5 OCRTool

The **OCRTool** is a command-line utility provided by Foxit PDF SDK designed to perform Optical Character Recognition (OCR) on PDF documents. Starting from version 11.1, the OCRTool is supported on Windows and Linux platforms.

It enables users to:

- Perform OCR on single PDF pages.
- Perform OCR on entire PDF documents.
- Convert scanned PDFs into editable formats (e.g., DOCX, XLSX, PPTX, etc.).

To obtain the OCRTool package and related components, please contact the Foxit support team or sales team.

3.35.5.1 Pre-requisites

Before using the OCRTool, ensure the following requirements are met:

- The Foxit PDF SDK library is properly deployed.
- The license files are available:

- gsdk_sn.txt
- gsdk_key.txt
- The OCR engine resource package is prepared (ABBYY OCR resources).
- All required files are placed in the same directory as the executable.

3.35.5.2 Command Format

The OCRTool uses the following command-line format:

```
ocr_tool [options]
```

To view the help information, use the command as below:

```
ocr_tool --help
```

3.35.5.3 Parameters

1. Required Parameters

Parameter	Description
-type	OCR type: 0 = OCRPDFPage 1 = OCRPDFDocument 2 = OCRConvertTo
-input	Input PDF file path
-output	Output file path
-engine	OCR engine resource path

2. Optional Parameters

Parameter	Description
-lang	OCR languages (e.g., "English, Chinese-Simplified")
-edit	Whether the output is editable (yes / no)
-pw	Password for the input PDF
-range	Page range (e.g., 0,3-5,7)

-format	Output format (valid for type=2 only): 0=DOCX 1=DOC 2=RTF 3=XLSX 4=XLS 5=PPTX 6=HTML
-log	Log file path

3. Image Processing Options

Parameter	Description
-is_detect_pictures	Detect images (yes / no)
-is_remove_noise	Remove noise (yes / no)
-is_correct_skew	Correct skew (yes / no)

4. Advanced Options

Parameter	Description
-is_enable_text_extraction_mode	Enable text extraction mode
-is_sequentially_process	Process pages sequentially
-is_auto_overwrite_resolution	Automatically overwrite resolution
-resolution_to_overwrite	Custom resolution (e.g., 300 DPI)
-confidence	OCR confidence threshold (0–100)
-ignore_image_width	Ignore images below a certain width (pixels)
-ignore_image_height	Ignore images below a certain height (pixels)

3.35.5.4 Example Commands

1. Perform OCR on an Entire PDF Document

```
ocr_tool -type 1 -input input.pdf -output output.pdf -engine path/to/ocr_engine -lang "English, Chinese-Simplified"
```

2. Convert a Scanned PDF to Editable DOCX

```
ocr_tool -type 2 -input scanned.pdf -output output.docx -engine path/to/ocr_engine -lang
```

```
"English" -format 0 -edit yes
```

3. Perform OCR on Specific Pages

```
ocr_tool -type 0 -input input.pdf -output output.pdf -engine path/to/ocr_engine -lang "English" -  
range 3-5,7
```

3.36 Compliance

PDF Compliance

Foxit PDF SDK supports to convert PDF versions among PDF 1.3, PDF 1.4, PDF 1.5, PDF 1.6 and PDF 1.7. When converting to PDF 1.3, if the source document contains transparency data, then it will be converted to PDF 1.4 instead of PDF 1.3 (PDF 1.3 does not support transparency). If the source document does not contain any transparency data, then it will be converted to PDF 1.3 as expected.

PDF/A Compliance

PDF/A is an ISO-standardized version of the PDF specialized for use in the archiving and long-term preservation of electronic documents. PDF/A differs from PDF by prohibiting features unsuitable for long-term archiving, such as font linking (as opposed to font embedding), encryption, JavaScript, audio, video and so on.

Foxit PDF SDK provides APIs to convert a PDF to be compliance with PDF/A standard, or verify whether a PDF is compliance with PDF/A standard. It supports the PDF/A version including PDF/A-1a, PDF/A-1b, PDF/A-2a, PDF/A-2b, PDF/A-2u, PDF/A-3a, PDF/A-3b, PDF/A-3u (ISO 19005- 1, 19005 -2 and 19005-3).

PDF/E Compliance

PDF/E is an ISO-standardized version of the PDF specialized for the reliable exchange and archiving of engineering documents. It is designed for the creation, exchange, archiving, and printing documents used in engineering workflows.

From version 10.1, Foxit PDF SDK provides APIs to convert a PDF to be compliance with PDF/E standard or verify whether a PDF is compliance with PDF/E standard. It supports the PDF/E-1 version.

PDF/X Compliance

PDF/X is an ISO-standardized version of the PDF specialized for the exchange of graphics-intensive documents. It is mainly used to ensure consistency and predictability when printing files in fields such as design, drawing, engineering, and graphic arts.

From version 10.1, Foxit PDF SDK provides APIs to convert a PDF to be compliance with PDF/X standard or verify whether a PDF is compliance with PDF/X standard. It supports the PDF/X version including PDF/X-1a, PDF/X-3, PDF/X-4, PDF/X-4p.

Preflight Feature

From version 10.1, Foxit PDF SDK supports preflight feature, which allows users to utilize Foxit PDF SDK to get preflight keys and analyze or fixup PDF file.

This section will provide instructions on how to set up your environment for running the 'compliance' or 'preflight' demo.

3.36.1 System Requirements

Platform: Windows, Linux (x86 and x64), Mac

Programming Language: C, C++, Java, C#, Python, Objective-C, Node.js, Go

License Key requirement: 'Compliance' module permission in the license key


SDK Version: Foxit PDF SDK (C++, Java, C#, Objective-C) 6.4 or higher (for PDF Compliance, it requires Foxit PDF SDK 7.1 or higher); Foxit PDF SDK (C) 7.4 or higher; Foxit PDF SDK (Python) 8.3 or higher; Foxit PDF SDK (Node.js) 10.0 or higher

Note: For PDF/E, PDF/X, and preflight feature, it requires Foxit PDF SDK 10.1 or higher.

3.36.2 Compliance resource files

Please contact Foxit support team or sales team to get the Compliance resource files package.

After getting the package, extract it to a desired directory (for example, extract the package to a directory: "**compliance/win**"), and then you can see the resource files for Compliance are as follows:

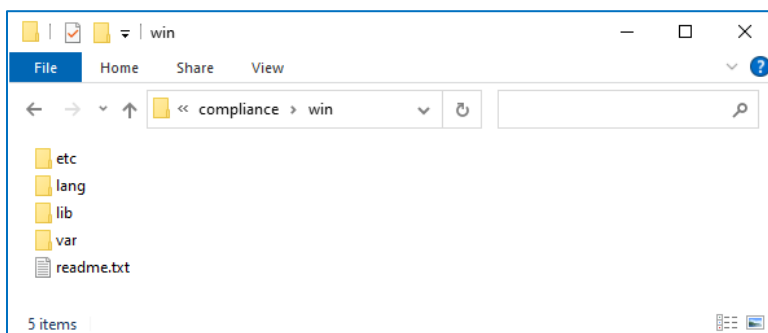

3.36.3 How to run the compliance or preflight demo

Before version 10.1, Foxit PDF SDK provides a **compliance** demo located in the "examples\simple_demo\compliance" folder to show you how to use Foxit PDF SDK to verify whether a PDF is compliance with PDF/A standard, and convert a PDF to be compliance with PDF/A standard, as well as convert PDF versions.

From version 10.1, Foxit PDF SDK provides two demos:

- A **compliance** demo located in the "examples\simple_demo\compliance" folder to show you how to use Foxit PDF SDK to verify whether a PDF is compliance with PDF/A or PDF/E or PDF/X standard, and convert a PDF to be compliance with PDF/A or PDF/E or PDF/X standard, as well as convert PDF versions.
- A **preflight** demo located in the "examples\simple_demo\preflight" folder to show you how to use Foxit PDF SDK to get preflight keys and analyze or fixup PDF file.

3.36.3.1 Build a compliance resource directory


Before running the **compliance** or **preflight** demo, you should first build a compliance resource directory, and then pass the directory to Foxit PDF SDK API **ComplianceEngine.Initialize** to initialize compliance engine.

Starting from version 10.0, the compliance resource files provide default thread-safety. For multithreading, the API **ComplianceEngine.InitializeThreadContext** should be called first for a new thread before using any other methods in the compliance add-on module.

To build a compliance resource directory, please follow the steps below:

- 1) Create a new folder to add the resources. For example, "D:/compliance_resources".
- 2) Copy the whole folders of "**ect**", "**lang**", "**var**" under the "compliance/win" to "D:/compliance_resources".
- 3) Add the appropriate library resource based on the platform architecture.
 - For **win32**, copy **all the files** under "compliance/win/lib/x86" folder to "D:/compliance_resources".
 - For **win64**, copy **all the files** under "compliance/win/lib/x64" folder to "D:/compliance_resources".

For example, use win32 platform architecture, then the compliance resource directory should be as follows:

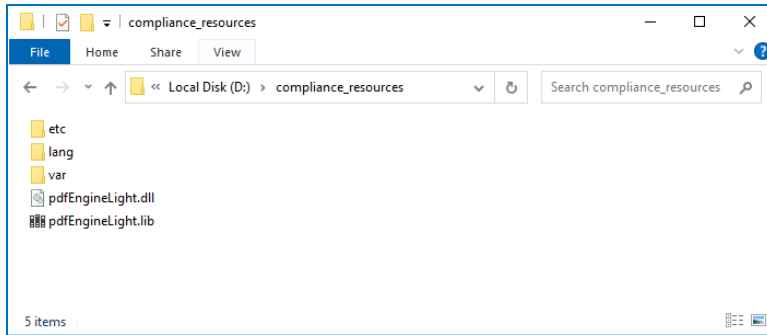

3.36.3.2 Configure the demo

After building the compliance resource directory, configure the demo in the "examples\simple_demo\compliance\compliance.cs" for compliance demo or "examples\simple_demo\preflight\preflight.cs" for preflight demo.

Specify the compliance resource directory

In the "compliance.cs" or "preflight.cs" file, add the compliance resource directory as follows, which will be used to initialize the compliance engine.

```
try
{
    string input_file = input_path + "AboutFoxit.pdf";
    // "compliance_resource_folder_path" is the path of compliance resource folder. Please refer to Developer Guide for more details.
    string compliance_resource_folder_path = "D:/compliance_resources";
    // If you use an authorization key for Foxit PDF SDK, please set a valid unlock code string to compliance_engine_unlockcode for ComplianceEngine.
    // If you use an trial key for Foxit PDF SDK, just keep compliance_engine_unlockcode as an empty string.
    string compliance_engine_unlockcode = "";

    if (compliance_resource_folder_path.Length < 1) {
        Console.WriteLine("compliance_resource_folder_path is still empty. Please set it with a valid path to compliance resource folder path.");
        return ;
    }
    // Initialize compliance engine.
    error_code = ComplianceEngine.Initialize(compliance_resource_folder_path, compliance_engine_unlockcode);
}
```

Note:

- If you are using a trial key for Foxit PDF SDK, you do not need to authorize the compliance engine library.
- If you are using an authorization key for Foxit PDF SDK, Foxit sales team will send you an extra unlock code for initializing compliance engine library. Pass the unlock code to the **initialize** function "ComplianceEngine.Initialize (compliance_resource_folder_path, compliance_engine_unlockcode)".

(Optional) Set language for compliance engine (only for compliance demo)

ComplianceEngine.SetLanguage function is used to set language for compliance engine. The default language is "English", and the supported languages are as follows:

"Czech", "Danish", "Dutch", "English", "French", "Finnish", "German", "Italian", "Norwegian", "Polish", "Portuguese", "Spanish", "Swedish", "Chinese-Simplified", "Chinese-Traditional", "Japanese", "Korean".

For example, set the language to "Chinese-Simplified":

```
// Set language. The default language is "English".  
ComplianceEngine.SetLanguage("Chinese-Simplified");
```

(Optional) Set a temp folder for compliance engine (only for compliance demo)


ComplianceEngine.SetTempFolderPath function is used to set a temp folder to store several files for proper processing (e.g verifying or converting). If no custom temp folder is set by this function, the default temp folder in system will be used.

For example, set the path to "D:/compliance_temp" (should be a valid path).

```
// Set custom temp folder path for ComplianceEngine.  
ComplianceEngine.SetTempFolderPath(L"D:/compliance_temp");
```

3.36.3.3 Run the demo

Take **compliance** demo as an example, once you run the demo successfully, the console will print the following by default:

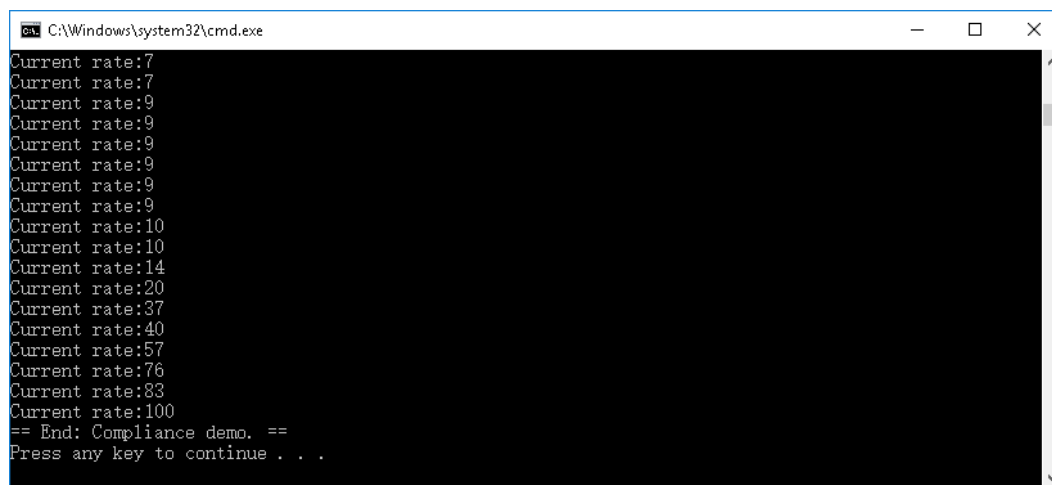

```
C:\Windows\system32\cmd.exe  
Current rate:7  
Current rate:7  
Current rate:9  
Current rate:9  
Current rate:9  
Current rate:9  
Current rate:9  
Current rate:10  
Current rate:10  
Current rate:14  
Current rate:20  
Current rate:37  
Current rate:40  
Current rate:57  
Current rate:76  
Current rate:83  
Current rate:100  
== End: Compliance demo. ==  
Press any key to continue . . .
```

The output files are located in "examples\simple_demo\output_files\compliance" folder.

3.37 Optimization

Optimization feature can reduce the size of PDF files to save disk space and make files easier to send and store, through compressing images, deleting redundant data, discarding useless user data and so on. From version 7.0, optimization module provides functions to compress the color/grayscale/monochrome images in PDF files to reduce the size of the PDF files.

Note: To use the Optimization feature, please make sure the license key has the permission of the 'Optimization' module.

Example:

3.37.1 How to optimize PDF files by compressing the color/grayscale/monochrome images

```
using System;

using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using foxit.addon;
using foxit.addon.optimization;

using (PDFDoc doc = new PDFDoc("input_pdf_file"))
{
    error_code = doc.Load(null);
    if (error_code != ErrorCode.e_ErrSuccess)
    {
        Console.WriteLine("Document Load Error: {0}\n", error_code);
        return;
    }
    using (Optimization_Pause pause = new Optimization_Pause(0, true))
    using (OptimizerSettings settings = new OptimizerSettings())
    {
        Console.WriteLine("Optimized Start.\n");
        Progressive progressive = Optimizer.Optimize(doc, settings, pause);
        Progressive.State progress_state = Progressive.State.e_ToBeContinued;
        while (Progressive.State.e_ToBeContinued == progress_state)
        {
            progress_state = progressive.Continue();
            int percent = progressive.GetRateOfProgress();
            Console.WriteLine("Optimize progress percent: {0}%\n", percent);
        }
        if (Progressive.State.e_Finished == progress_state)
        {
            doc.SaveAs("ImageCompression_Optimized.pdf",
(int)PDFDoc.SaveFlags.e_SaveFlagRemoveRedundantObjects);
        }
        Console.WriteLine("Optimized Finish.\n");
    }
}
```

```
}  
}
```

3.38 HTML to PDF Conversion

For some large HTML files or a webpage which contain(s) many contents, it is not convenient to print or archive them directly. Foxit PDF SDK provides APIs to convert the online webpage or local HTML files like invoices or reports into PDF file(s), which makes them easier to print or archive. In the process of conversion from HTML to PDF, Foxit PDF SDK also supports to create and add PDF Tags based on the organizational structure of HTML.

For HTML to PDF module, it supports HTML5, CSS3 and JavaScript.

From version 8.1, the converted files (generated by HTML to PDF) can be provided in the form of file stream. If you want to use this feature, you should contact Foxit support team or sales team to get the latest engine files package.

This section will provide instructions on how to set up your environment for running the 'html2pdf' demo.

3.38.1 System requirements

Platform: Windows, Linux (x86 and x64), Mac

Programming Language: C, C++, Java, C#, Python, Objective-C, Node.js, Go

License Key requirement: 'Conversion' module permission in the license key

SDK Version: Foxit PDF SDK (C++, Java, C#, Objective-C) 7.0 or higher; Foxit PDF SDK (C) 7.4 or higher; Foxit PDF SDK (Python) 8.3 or higher; Foxit PDF SDK (Node.js) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

3.38.2 HTML to PDF engine files

Please contact Foxit support team or sales team to get the HTML to PDF engine files package.

After getting the package, extract it to a desired directory (for example, extract the package to a directory: "**htmltopdf/win/**").

3.38.3 How to run the html2pdf demo

Foxit PDF SDK provides a html2pdf demo located in the "examples\simple_demo\html2pdf" folder to show you how to use Foxit PDF SDK to convert from html to PDF.

3.38.3.1 Prepare a HTML2PDF engine directory

Before running the html2pdf demo, you should first extract engine package to a desired directory (for example, extract the package to a directory: "D:/htmltopdf/win/"), and then pass the engine file path to the API **foxit.addon.conversion.Convert.FromHTML** to convert html to PDF file.

3.38.3.2 Configure the demo

For html2pdf demo, you can configure the demo in the "examples\simple_demo\html2pdf\html2pdf.cs" file, or you can configure the demo with parameters directly in a command prompt. Following will configure the demo in "html2pdf.cs" file on Windows.

Specify the html2pdf engine directory

In the "html2pdf.cs" file, add the path of the engine file "fxhtml2pdf.exe" as follows, which will be used to convert html files to PDF files.

```
// "engine_path" is the path of the engine file "fxhtml2pdf" which is used to converting html to pdf. Please refer to Developer Guide for more details.  
static String engine_path = "D:/htmltopdf/win/fxhtml2pdf.exe"; // or engine_path = "D:/htmltopdf/win/fxhtml2pdf";
```

(Optional) Specify cookies file path


Add the path of the cookies file exported from the web pages that you want to convert. For example,

```
// "cookies_path" is the path of the cookies file exported from the web pages that you want to convert. Please refer to Developer Guide for more details.  
static String cookies_path = "D:/cookies.txt";
```

3.38.3.3 Run the demo

Run the demo without parameters

Once you run the demo successfully, the console will print the following by default:

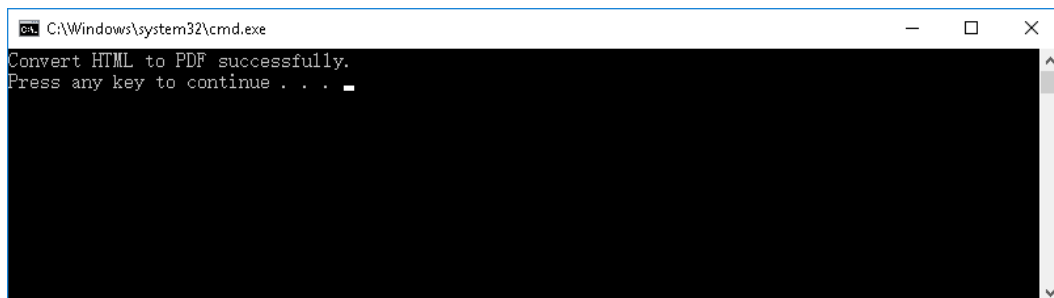


```
C:\Windows\system32\cmd.exe  
Convert HTML to PDF successfully.  
Press any key to continue . . .
```

Run the demo with parameters

After building the demo successfully, open a command prompt, navigate to "examples\simple_demo\bin", type "html2pdf_vs2017.exe --help" for example to see how to use the parameters to execute the program.

For example, convert the URL web page "www.foxitsoftware.com" into a PDF with setting the page width to 900 points and the page height to 300 points:

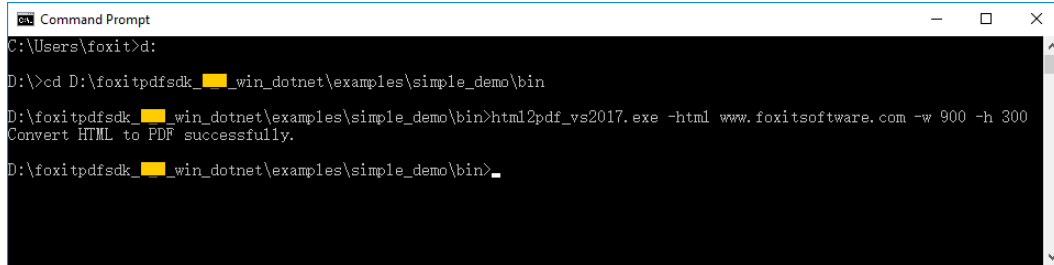

```
Command Prompt
C:\Users\foxit>d:
D:\>cd D:\foxitpdfsdk\win_dotnet\examples\simple_demo\bin
D:\foxitpdfsdk\win_dotnet\examples\simple_demo\bin>html2pdf_vs2017.exe -html www.foxitsoftware.com -w 900 -h 300
Convert HTML to PDF successfully.
D:\foxitpdfsdk\win_dotnet\examples\simple_demo\bin>
```

The output file is located in "examples\simple_demo\output_files\html2pdf" folder.

Parameters Description

Basic Syntax:

html2pdf_xxx <-html <The url or html path>> <-o <output pdf path>> <-engine <htmltopdf engine path>>
[-w <page width>] [-h <page height>] [-ml <margin left>] [-mr <margin right>]
[-mt <margin top>] [-mb <margin bottom>] [-r <page rotation degree>] [-mode <page mode>] [-scale <scaling mode>] [-link <whether to convert link>]
[-tag <whether to generate tag>] [-bookmarks <whether to generate bookmarks>]
[-print_background <whether to print background>]
[-optimize_tag <whether to optimize tag tree>] [-media <media style>] [-encoding <HTML encoding format>] [-render_images <Whether to render images>]
[-remove_underline_for_link <Whether to remove underline for link>]
[-headerfooter <Whether to generate headerfooter>] [-headerfooter_title <headerfooter title>] [-headerfooter_url <headerfooter url>] [-bookmark_root_name <bookmark root name>] [-resize_objects <Whether to enable the JavaScripts related resizing of the objects>]
[-cookies <cookies file path>] [-timeout <timeout>] [--help<Parameter usage>]

Note:

- <> required
- [] optional

Parameters	Description
--help	The usage description of the parameters.

-html	The url or html file path. For example, '-html www.foxitsoftware.com'.
-o	The path of the output PDF file.
-engine	The path of the engine file "fxhtml2pdf.exe".
-w	The page width of the output PDF file in points.
-h	The page height of the output PDF file in points.
-r	The page rotation for the output PDF file. <ul style="list-style-type: none">• 0 : 0 degree.• 1 : 90 degree.• 2 : 180 degree.• 3 : 270 degree.
-ml	The left margin of the pages for the output PDF file.
-mr	The right margin of the pages for the output PDF file.
-mt	The top margin of the pages for the output PDF file.
-mb	The bottom margin of the pages for the output PDF file.
-mode	The page mode for the output PDF file. <ul style="list-style-type: none">• 0 : Single page mode.• 1 : Multiple pages mode.
-scale	The scaling mode. <ul style="list-style-type: none">• 0 : No need to scale pages.• 1 : Scale pages.• 2 : Enlarge page.
-link	Whether to convert links. <ul style="list-style-type: none">• 'yes' : Convert links.• 'no' : No need to convert links.
-tag	Whether to generate tag. <ul style="list-style-type: none">• 'yes' : Generate tag.• 'no' : No need to generate tag.
-bookmarks	Whether to generate bookmarks. <ul style="list-style-type: none">• 'yes' : Generate bookmarks .• 'no' : No need to generate bookmarks.
-print_background	Whether to print background. <ul style="list-style-type: none">• 'yes' : Print bookmarks .• 'no' : No need to print bookmarks.
-optimize_tag	Whether to optimize tag tree.

	<ul style="list-style-type: none"> • 'yes' : Optimize tag tree . • 'no' : No need to optimize tag tree.
-media	<p>The media style.</p> <ul style="list-style-type: none"> • 0 : Screen media style. • 1 : Print media style.
-encoding	<p>The HTML encoding format.</p> <ul style="list-style-type: none"> • 0 : Auto encoding . • 1-73 : Other encodings.
-render_images	<p>Whether to render images.</p> <ul style="list-style-type: none"> • 'yes' : Render images. • 'no' : No need to render images.
-remove_underline_for_link	<p>Whether to remove underline for link.</p> <ul style="list-style-type: none"> • 'yes' : Remove underline for link. • 'no' : No need to remove underline for link.
-headerfooter	<p>Whether to generate headerfooter.</p> <ul style="list-style-type: none"> • 'yes' : Generate headerfooter. • 'no' : No need to generate headerfooter.
-headerfooter_title	The headerfooter title.
-headerfooter_url	The headerfooter url.
-bookmark_root_name	The bookmark root name.
-resize_objects	<p>Whether to enable the JavaScripts related resizing of the objects during rendering process.</p> <ul style="list-style-type: none"> • 'yes' : Enable. • 'no' : Disable.
-cookies	The path of the cookies file exported from a URL that you want to convert.
-timeout	The timeout of loading webpages.

3.38.4 How to work with Html2PDF API

```
using foxit;

foxit.addon.conversion.HTML2PDFSettingData pdf_setting_data = new
foxit.addon.conversion.HTML2PDFSettingData();
pdf_setting_data.is_convert_link = true;
pdf_setting_data.is_generate_tag = true;
pdf_setting_data.to_generate_bookmarks = true;
pdf_setting_data.rotate_degrees = 0;
pdf_setting_data.page_height = 640;
pdf_setting_data.page_width = 900;
```



```
pdf_setting_data.page_mode =
foxit.addon.conversion.HTML2PDFSettingData.HTML2PDFPageMode.e_PageModeSinglePage;
pdf_setting_data.scaling_mode =
foxit.addon.conversion.HTML2PDFSettingData.HTML2PDFScaleMode.e_ScalingModeScale;
pdf_setting_data.to_print_background = true;
pdf_setting_data.to_optimize_tag_tree = false;
pdf_setting_data.media_style =
foxit.addon.conversion.HTML2PDFSettingData.HTML2PDFMediaStyle.e_MediaStyleScreen;
...

foxit.addon.conversion.Convert.FromHTML(url_or_html, engine_path, cookies_path, pdf_setting_data,
output_path, time_out);
```

3.38.5 How to get HTML data from stream and convert it to a PDF file

5. Defines a [FileRead](#) class inherited from [FileReaderCallback](#) used to get html data from stream or memory. And defines a [FileWriter](#) class inherited from [FileWriterCallback](#) used to do file writing. For the implementations of [FileRead](#) and [FileWriter](#) classes, please refer to the **html2pdf** demo in the "examples\simple_demo\html2pdf" folder.
6. Get html data from stream and set resources related to source html.
7. Call the [foxit.addon.conversion.Convert.FromHTML](#) function to convert it to a PDF file.

```
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;
using System.IO;

foxit.addon.conversion.HTML2PDFSettingData pdf_setting_data = new
foxit.addon.conversion.HTML2PDFSettingData();
pdf_setting_data.page_height = 650;
pdf_setting_data.page_width = 950;
pdf_setting_data.is_to_page_scale = false;
pdf_setting_data.page_margin = new RectF(18, 18, 18, 18);
pdf_setting_data.is_convert_link = true;
pdf_setting_data.rotate_degrees = 0;
pdf_setting_data.is_generate_tag = true;
pdf_setting_data.page_mode =
foxit.addon.conversion.HTML2PDFSettingData.HTML2PDFPageMode.e_PageModeSinglePage;
pdf_setting_data.scaling_mode =
foxit.addon.conversion.HTML2PDFSettingData.HTML2PDFScalingMode.e_ScalingModeScale;
pdf_setting_data.to_generate_bookmarks = true;
pdf_setting_data.encoding_format = 0;
pdf_setting_data.to_render_images = true;
pdf_setting_data.to_remove_underline_for_link = false;
pdf_setting_data.to_set_headerfooter = false;
pdf_setting_data.headerfooter_title = "";
pdf_setting_data.headerfooter_url = "";
pdf_setting_data.bookmark_root_name = "abcde";
pdf_setting_data.to_resize_objects = true;
```

```
pdf_setting_data.to_print_background = false;
pdf_setting_data.to_optimize_tag_tree = false;
pdf_setting_data.media_style = 0;
pdf_setting_data.to_load_active_content = false;

String output_path = output_directory + "html2pdf_filestream_result.pdf";
FileWriter filewrite = new FileWriter();
filewrite.LoadFile(output_path);
// "htmlfile" is the path of the html file to be loaded. For example: "C:/aaa.html". The method of "FromHTML"
will load this file as a stream.
String htmlfile = "";
FileRead filereader = new FileRead();
filereader.loadFile(htmlfile, false);

// "htmlfilepng" is the path of the png resource file to be loaded. For example: "C:/aaa.png". set "htmlfilepng" in
the related_resource_file of HTML2PDFRelatedResource.
String htmlfilepng = "";
FileRead filereader1 = new FileRead();
filereader1.loadFile(htmlfilepng, false);
// "relativefilepath" is the resource file's relative path. For example: "./aaa.png".
String relativefilepath = "";
foxit.addon.conversion.HTML2PDFRelatedResourceArray html2PDFRelatedResourceArray = new
foxit.addon.conversion.HTML2PDFRelatedResourceArray();
foxit.addon.conversion.HTML2PDFRelatedResource html2PDFRelatedResource = new
foxit.addon.conversion.HTML2PDFRelatedResource(filereader1, relativefilepath);

html2PDFRelatedResourceArray.Add(html2PDFRelatedResource);
foxit.addon.conversion.Convert.FromHTML(filereader, html2PDFRelatedResourceArray, engine_path, null,
pdf_setting_data, filewrite, 30);
Console.WriteLine("Convert HTML to PDF successfully by filestream!");
```

3.39 Office to PDF Conversion with third-party engines

From version 7.3, Foxit PDF SDK provides APIs to convert Microsoft Office documents (Word and Excel) into professional-quality PDF files on Windows platform.

From version 7.4, Foxit PDF SDK also supports to convert PowerPoint documents into PDF files on Windows platform.


From version 8.4, Foxit PDF SDK provides APIs to convert Microsoft Office documents (Word, Excel and PowerPoint) into professional-quality PDF files on Linux platform (x86, x64 and armv8). Foxit PDF SDK for .NET just supports Windows platform.

From version 11.1, Foxit PDF SDK provides a new option to convert Office documents to PDF using WPS Office on Windows.

For using this feature, please note that:

- For using Microsoft Office engine, please make sure that Microsoft Office 2007 version or higher is already installed on your Windows system.
- For using WPS Office engine, please make sure that kingsoft wps-office is already installed on your Windows system.

Note: After installing WPS Office, certain settings may cause WPS to open instead of Microsoft Office, even when you choose to use Microsoft Office. To avoid this issue, make sure not to select the following options in the settings of WPS Office.

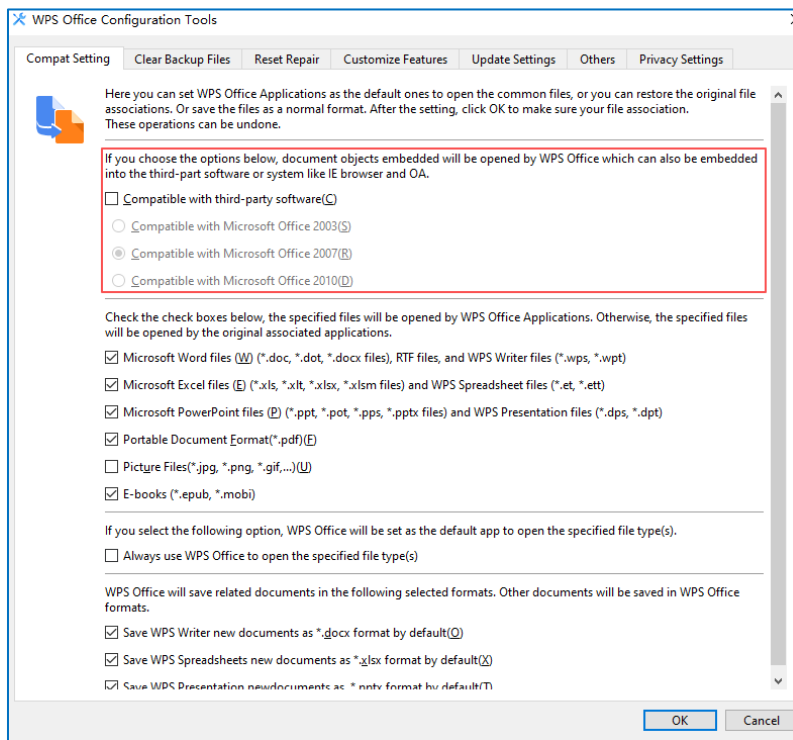

- For using Microsoft Office engine, before converting Excel to PDF, please make sure that the default Microsoft virtual printer is already set on your Windows system.

3.39.1 System requirements

Platform: Windows, Linux (x86, x64 and armv8)

Programming Language: C, C++, Python, Java, C#, Node.js, Go

License Key requirement: 'Conversion' module permission in the license key

SDK Version: Word and Excel (Foxit PDF SDK (C++, C#, Java) 7.3 or higher; Foxit PDF SDK (C) 7.4 or higher; Foxit PDF SDK (Python) 8.3 or higher); PowerPoint (Foxit PDF SDK (C, C++, C#, Java) 7.4 or higher; Foxit PDF SDK (Python) 8.3 or higher); Word/Excel/PowerPoint (Foxit PDF SDK (Node.js) 10.0 or higher); Word/Excel/PowerPoint (Foxit PDF SDK (Go) 11.0 or higher)

Example:

Note:

- A new parameter, **Office2PdfEngine**, has been added to *Convert.FromWord*, *Convert.FromExcel*, and *Convert.FromPowerPoint*. This parameter is used to specify the engine for conversion:
 - *conversion.Convert.Office2PdfEngine.e_Office2PdfEngineMicrosoft* (Microsoft Office)
 - *conversion.Convert.Office2PdfEngine.e_Office2PdfEngineWps* (WPS Office)

3.39.2 How to convert Word to PDF

```
using foxit;
...
// Make sure that SDK has already been initialized successfully.

string word_file_path = "test.doc";
string saved_pdf_path = "saved.pdf";

// Use default Word2PDFSettingData values.
using (foxit.addon.conversion.Word2PDFSettingData word_convert_setting_data = new
foxit.addon.conversion.Word2PDFSettingData())
{
    foxit.addon.conversion.Convert.FromWord(word_file_path, "", saved_pdf_path,
word_convert_setting_data, conversion.Convert.Office2PdfEngine.e_Office2PdfEngineMicrosoft); // Use
Microsoft Office engine for example.
}
```

3.39.3 How to convert Excel to PDF

```
using foxit;
...
// Make sure that SDK has already been initialized successfully.

string excel_file_path= "test.xls";
string saved_pdf_path = "saved.pdf";
// Use default Excel2PDFSettingData values.
using (foxit.addon.conversion.Excel2PDFSettingData excel_convert_setting_data = new
foxit.addon.conversion.Excel2PDFSettingData())
{
    foxit.addon.conversion.Convert.FromExcel(excel_file_path, "", saved_pdf_path,
excel_convert_setting_data, conversion.Convert.Office2PdfEngine.e_Office2PdfEngineMicrosoft); // Use
Microsoft Office engine for example.
}
```

3.39.4 How to convert PowerPoint to PDF

```
using foxit;

// Make sure that SDK has already been initialized successfully.
```

```
string ppt_file_path = "test.ppt";
string saved_pdf_path = "saved.pdf";

// Use default PowerPoint2PDFSettingData values.
using (foxit.addon.conversion.PowerPoint2PDFSettingData ppt_convert_setting_data = new
foxit.addon.conversion.PowerPoint2PDFSettingData())
{
    foxit.addon.conversion.Convert.FromPowerPoint(ppt_file_path, "", saved_pdf_path,
ppt_convert_setting_data, conversion.Convert.Office2PdfEngine.e_Office2PdfEngineMicrosoft); // Use
Microsoft Office engine for example.
}
```

3.40 Office to PDF Conversion with Foxit's self-developed engines

From version 10.1, Foxit PDF SDK offers the capability to convert Microsoft Office documents (Word, Excel and PowerPoint) into professional-quality PDF files with Foxit's self-developed engines. This feature is available through the Foxit PDF Conversion SDK on Windows platform.

3.40.1 System requirements

Platform: Windows, Linux (x86, and x64)

Programming Language: C, C++, Python, Java, C#, Node.js, Go

License Key requirement: 'Office2PDF' module permission in the license key

SDK Version: Foxit PDF SDK for Windows 10.1 or higher; Foxit PDF SDK for Linux x86/x64 11.0 or higher

3.40.2 Office to PDF resource files (Foxit PDF Conversion SDK)

Please contact Foxit support team or sales team to get the Foxit PDF Conversion SDK (C++).

After getting Foxit PDF Conversion SDK package, extract it to a desired directory, for example, extract the package to a directory: "D:/foxitpdfconversionsdk*_win/" for Windows.

3.40.3 How to run the office2pdf demo using Foxit PDF Conversion SDK

Before running the office2pdf demo in the "examples\simple_demo\office2pdf" folder using Foxit PDF Conversion SDK, you should first add the Foxit PDF Conversion SDK library in the demo code, for example:

```
// If you want to convert office files to PDF whitout other third-party engines, you can use the Office2PDF
module.
string library_path = "D:/foxitpdfconversionsdk*_win/lib/fpdfconversionsdk_win32.dll";
```

Then, specify the office2pdf resource data files:

```
// A valid path of a folder which contains resource data files.
```

```
office2pdf_setting_data.resource_folder_path = " D:/foxitpdfconversionsdk*_win/res/office2pdf ";
```

Finally, run the demo following the steps as the other demos.

3.40.4 How to convert office files to PDF with Foxit's self-developed engines

```
using foxit;
...

// If you want to convert office files to PDF without other third-party engines, you can use the Office2PDF
// module.
string library_path = ""; // Path of Foxit PDF Conversion SDK library, please ensure the path is valid.
// Initialize the Office2PDF module.
foxit.addon.conversion.office2pdf.Office2PDF.Initialize(library_path);
// Use default Office2PDFSettingData values.
using (foxit.addon.conversion.office2pdf.Office2PDFSettingData office2pdf_setting_data = new
foxit.addon.conversion.office2pdf.Office2PDFSettingData())
{
    // A valid path of a folder which contains resource data files.
    office2pdf_setting_data.resource_folder_path = "";
    // Convert Word file to PDF file.
    saved_pdf_path = output_path + "word2pdf_result_foxit.pdf";
    foxit.addon.conversion.office2pdf.Office2PDF.ConvertFromWord(word_file_path, "", saved_pdf_path,
    office2pdf_setting_data);

    // Convert Excel file to PDF file.
    saved_pdf_path = output_path + "excel2pdf_result_foxit.pdf";
    foxit.addon.conversion.office2pdf.Office2PDF.ConvertFromExcel(excel_file_path, "", saved_pdf_path,
    office2pdf_setting_data);

    // Convert PowerPoint file to PDF file.
    saved_pdf_path = output_path + "ppt2pdf_result_foxit.pdf";
    foxit.addon.conversion.office2pdf.Office2PDF.ConvertFromPowerPoint(ppt_file_path, "", saved_pdf_path,
    office2pdf_setting_data);
}

// Release the Office2PDF module.
foxit.addon.conversion.office2pdf.Office2PDF.Release();
```

3.41 Output Preview

From version 7.4, Foxit PDF SDK supports output preview feature which can preview color separations and test different color profiles.

3.41.1 System requirements

Platform: Windows, Linux (x86 and x64), Mac (x64)

Programming Language: C, C++, Java, C#, Python, Objective-C, Node.js, Go

License Key requirement: valid license key

SDK Version: Foxit PDF SDK (C, C++, Java, C#, Objective-C) 7.4 or higher; Foxit PDF SDK (Python) 8.3 or higher; Foxit PDF SDK (Node.js) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

3.41.2 How to run the output preview demo

Before running the output preview demo in the "examples\simple_demo\output_preview" folder, you should first set the folder path of "**res\icc_profile**" in the SDK package to the variable **default_icc_folder_path**. For example:

```
// "default_icc_folder_path" is the path of the folder which contains default icc profile files. Please refer to  
Developer Guide for more details.  
string default_icc_folder_path = "E:\foxitpdfsdk_X_X_win_dotnet/res/icc_profile";
```

Then, run the demo following the steps as the other demos.

3.41.3 How to do output preview using Foxit PDF SDK

```
using foxit.common;  
using foxit.pdf;  
  
// Make sure that SDK has already been initialized successfully.  
  
// Set folder path which contains default icc profile files.  
Library.SetDefaultICCPProfilesPath(default_icc_folder_path);  
  
// Load a PDF document; Get a PDF page and parse it.  
// Prepare a Renderer object and the matrix for rendering.  
  
using (OutputPreview output_preview = new OutputPreview(pdf_doc))  
{  
    string simulation_icc_file_path = input_path + "icc_profile/USWebCoatedSWOP.icc";  
    output_preview.SetSimulationProfile(simulation_icc_file_path);  
    output_preview.SetShowType(OutputPreview.ShowType.e_ShowAll);  
    StringArray process_plates = output_preview.GetPlates(OutputPreview.ColorantType.e_ColorantTypeProcess);  
    StringArray spot_plates = output_preview.GetPlates(OutputPreview.ColorantType.e_ColorantTypeSpot);  
  
    // Set check status of process plate to be true, if there's any process plate.  
    for (uint i = 0; i < process_plates.GetSize(); i++)  
    {  
        output_preview.SetCheckStatus(process_plates.GetAt(i), true);  
    }  
  
    // Set check status of spot plate to be true, if there's any spot plate.  
    for (uint i = 0; i < spot_plates.GetSize(); i++)  
    {  
        output_preview.SetCheckStatus(spot_plates.GetAt(i), true);  
    }  
  
    using (foxit.common.Bitmap preview_bitmap = output_preview.GeneratePreviewBitmap(pdf_page,  
display_matrix, renderer))
```

```
{  
    ...// Use preview bitmap or save it.  
}  
}
```

3.42 Combination

Combination feature is used to combine several PDF files into one PDF file.

3.42.1 How to combine several PDF files into one PDF file

```
using foxit.pdf;  
  
// Make sure that SDK has already been initialized successfully.  
  
CombineDocumentInfoArray info_array = new CombineDocumentInfoArray();  
info_array.Add(new CombineDocumentInfo(input_path + "AboutFoxit.pdf", ""));  
info_array.Add(new CombineDocumentInfo(input_path + "Annot_all.pdf", ""));  
info_array.Add(new CombineDocumentInfo(input_path + "SamplePDF.pdf", ""));  
  
String savepath = output_path + "Test_Combined.pdf";  
int option = (int)(Combination.CombineDocsOptions.e_CombineDocsOptionBookmark |  
Combination.CombineDocsOptions.e_CombineDocsOptionAcroformRename |  
Combination.CombineDocsOptions.e_CombineDocsOptionStructTree |  
Combination.CombineDocsOptions.e_CombineDocsOptionOutputIntents |  
Combination.CombineDocsOptions.e_CombineDocsOptionOCProperties |  
Combination.CombineDocsOptions.e_CombineDocsOptionMarkInfos |  
Combination.CombineDocsOptions.e_CombineDocsOptionPageLabels |  
Combination.CombineDocsOptions.e_CombineDocsOptionNames |  
Combination.CombineDocsOptions.e_CombineDocsOptionObjectStream |  
Combination.CombineDocsOptions.e_CombineDocsOptionDuplicateStream);  
  
Progressive progress = Combination.StartCombineDocuments(savepath, info_array, option, null);  
Progressive.State progress_state = Progressive.State.e_ToBeContinued;  
while (Progressive.State.e_ToBeContinued == progress_state)  
{  
    progress_state = progress.Continue();  
}
```

3.43 PDF Portfolio

PDF portfolios are a combination of files with different formats. Portfolio file itself is a PDF document, and files with different formats can be embedded into this kind of PDF document.

3.43.1 System requirements

Platform: Windows, Linux, Mac

Programming Language: C, C++, Java, C#, Python, Objective-C, Node.js, Go

License Key requirement: valid license key

SDK Version: Foxit PDF SDK (C, C++, Java, C#, Objective-C) 7.6 or higher; Foxit PDF SDK (Python) 8.3 or higher; Foxit PDF SDK (Node.js) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

Example:

3.43.2 How to create a new and blank PDF portfolio

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

// Make sure that SDK has already been initialized successfully.

using (Portfolio new_portfolio = Portfolio.CreatePortfolio())
{
    // Set properties, add file/folder node to the new portfolio.
    ...

    // Get portfolio PDF document object.
    using (PDFDoc portfolio_pdf_doc = new_portfolio.GetPortfolioPDFDoc())
    {
        ...
    }
}
```

3.43.3 How to create a Portfolio object from a PDF portfolio

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

// Make sure that SDK has already been initialized successfully.

using (PDFDoc portfolio_pdf_doc = new PDFDoc("portfolio.pdf"))
{
    ErrorCode error_code = portfolio_pdf_doc.Load(null);
    if (ErrorCode.e_ErrSuccess == error_code)
    {
        if (portfolio_pdf_doc.IsPortfolio())
        {
            using (Portfolio existed_portfolio = Portfolio.CreatePortfolio(portfolio_pdf_doc))
            {
                ...
            }
        }
    }
}
```

3.43.4 How to get portfolio nodes

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

// Make sure that SDK has already been initialized successfully.

// Portfolio object has been created, assume it is named "portfolio".
...

using (PortfolioNode root_node = portfolio.GetRootNode())
{
    using (PortfolioFolderNode root_folder = new PortfolioFolderNode(root_node))
    {
        using (PortfolioNodeArray sub_nodes = root_folder.GetSortedSubNodes())
        {
            for (uintindex = 0; index < sub_nodes.GetSize(); index++)
            {
                using (PortfolioNode node = sub_nodes.GetAt(index))
                {
                    switch (node.GetNodeType())
                    {
                        case PortfolioNode::e_TypeFolder:
                        {
                            using (PortfolioFolderNode folder_node = new PortfolioFolderNode(node))
                            {
                                // Use PortfolioFolderNode's getting method to get some properties.
                                ...

                                PortfolioNodeArray sub_nodes_2 = folder_node.GetSortedSubNodes();
                                ...
                                break;
                            }
                        }
                        case PortfolioNode::e_TypeFile:
                        {
                            using (PortfolioFileNode file_node = new PortfolioFileNode(node))
                            {
                                // Get file specification object from this file node, and then get/set information from/to this
                                file specification object.
                                using (FileSpec file_spec = file_node.GetFileSpec())
                                {
                                    ...
                                    break;
                                }
                            }
                        }
                    }
                }
            }
        }
    }
}
```

```
}  
}  
}
```

3.43.5 How to add file node or folder node

```
using foxit;  
using foxit.common;  
using foxit.common.fxcr;   
using foxit.pdf;  
  
// Make sure that SDK has already been initialized successfully.  
  
// Portfolio object has been created, and the root folder node has been retrieved, assume it is named  
"root_folder".  
...  
  
// Add file from path.  
string path_to_a_file = "directory/Sample.txt";  
using (PortfolioFileNode new_file_node_1 = root_folder.AddFile(path_to_a_file))  
{  
    // User can update properties of file specification for new_file_node_1 if necessary.  
    ...  
}  
  
// Add file from MyStreamCallback which is inherited from StreamCallback and implemented by user.  
MyStreamCallback my_stream_callback = new MyStreamCallback();  
using (PortfolioFileNode new_file_node_2 = root_folder.AddFile(my_stream_callback, "file_name"))  
{  
    // Please get file specification of new_file_node_2 and update properties of the file specification by its setting  
    methods.  
    ...  
}  
  
// Add a loaded PDF file.  
// Open and load a PDF file, assume it is named "test_pdf_doc".  
...  
  
using (PortfolioFileNode new_file_node_3 = root_folder.AddPDFDoc(test_pdf_doc, "pdf_file_name"))  
{  
    // User can update properties of file specification for new_file_node_3 if necessary.  
    ...  
}  
  
// Add a sub folder in root_folder.  
using (PortfolioFolderNode new_sub_foldernode = root_folder.AddSubFolder("Sub Folder-1")) {  
    // User can add file or folder node to new_sub_foldernode.  
    ...  
}
```

3.43.6 How to remove a node

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.pdf;

// Make sure that SDK has already been initialized successfully.

// Remove a child folder node from its parent folder node.
parent_folder_node.RemoveSubNode(child_folder_node);
// Remove a child file node from its parent folder node.
parent_folder_node.RemoveSubNode(child_file_node);
```

3.44 Table Maker

From version 8.4, Foxit PDF SDK supports to add table to PDF files.

3.44.1 System requirements

Platform: Windows, Mac, Linux

Programming Language: C, C++, Java, C#, Python, Objective-C, Node.js, Go

License Key requirement: 'TableMaker' module permission in the license key

SDK Version: Foxit PDF SDK (C, C++, C#, Java, Python, Objective-C) 8.4 or higher; Foxit PDF SDK (Node.js) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

3.44.2 How to add table to a PDF document

Foxit PDF SDK provides an electronictable demo located in the "examples\simple_demo\electronictable" folder to show you how to use Foxit PDF SDK to add table to PDF document.

```
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.addon;
using foxit.addon.tablegenerator;
...
// Add a spreadsheet with 4 rows and 3 columns
int index = 0;
using (TableCellDataArray cell_array = new TableCellDataArray())
{
    for (int row = 0; row < 4; row++)
    {
        using (RichTextStyle style = new RichTextStyle())
        using (TableCellDataColArray col_array = new TableCellDataColArray())
```

```
{
    for (int col = 0; col < 3; col++)
    {
        string cell_text = GetTableCellText(index);
        SetTableTextStyle(index++, style);
        Image image = new Image();
        using (TableCellData cell_data = new TableCellData(style, cell_text, image, new RectF()))
        {
            col_array.Add(cell_data);
        }
    }
    cell_array.Add(col_array);
}

float page_width = pdf_page.GetWidth();
float page_height = pdf_page.GetHeight();
TableBorderInfo outside_border_left = new TableBorderInfo();
outside_border_left.line_width = 1;
outside_border_left.table_border_style = TableBorderInfo.TableBorderStyle.e_TableBorderStyleSolid;
TableBorderInfo outside_border_right = new TableBorderInfo();
outside_border_right.line_width = 1;
outside_border_right.table_border_style = TableBorderInfo.TableBorderStyle.e_TableBorderStyleSolid;
TableBorderInfo outside_border_top = new TableBorderInfo();
outside_border_top.line_width = 1;
outside_border_top.table_border_style = TableBorderInfo.TableBorderStyle.e_TableBorderStyleSolid;
TableBorderInfo outside_border_bottom = new TableBorderInfo();
outside_border_bottom.line_width = 1;
outside_border_bottom.table_border_style = TableBorderInfo.TableBorderStyle.e_TableBorderStyleSolid;
TableBorderInfo inside_border_row_info = new TableBorderInfo();
inside_border_row_info.line_width = 1;
inside_border_row_info.table_border_style = TableBorderInfo.TableBorderStyle.e_TableBorderStyleSolid;
TableBorderInfo inside_border_col_info = new TableBorderInfo();
inside_border_col_info.line_width = 1;
inside_border_col_info.table_border_style = TableBorderInfo.TableBorderStyle.e_TableBorderStyleSolid;
using (RectF rect = new RectF(100, 550, page_width - 100, page_height - 100))
    using (TableData data = new TableData(rect, 4, 3, outside_border_left, outside_border_right,
        outside_border_top, outside_border_bottom, inside_border_row_info, inside_border_col_info, new
        TableCellIndexArray(), new FloatArray(), new FloatArray()))
    {
        TableGenerator.AddTableToPage(pdf_page, data, cell_array);
    }
}
...
```

3.45 Accessibility

From version 8.4, Foxit PDF SDK supports to tag PDF files.

3.45.1 System requirements

Platform: Windows, Mac, Linux

Programming Language: C, C++, Java, C#, Python, Objective-C, Node.js, Go

License Key requirement: 'Accessibility' module permission in the license key

SDK Version: Foxit PDF SDK (C, C++, C#, Java, Python, Objective-C) 8.4 or higher; Foxit PDF SDK (Node.js) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

3.45.2 How to tag a PDF document

Foxit PDF SDK provides a taggedpdf demo located in the "examples\simple_demo\taggedpdf" folder to show you how to use Foxit PDF SDK to tag a PDF document.

```
using foxit.common;
using foxit.common.fxcr;
using foxit.addon.conversion;
using foxit.pdf;
using foxit.addon.accessibility;

...

using(pdf_doc=newPDFDoc(input_file))
{
    pdf_doc.Load(null);
    using(vartaggedpdf=newTaggedPDF(pdf_doc))
    {
        Progressiveprogressive=taggedpdf.StartTagDocument(null);
        Progressive.Statestate=Progressive.State.e_ToBeContinued;
        while(state==Progressive.State.e_ToBeContinued)
        {
            state=progressive.Continue();
        }
    }
    pdf_doc.SaveAs(output_file,0);
}

...
```

3.46 PDF to Office Conversion

Foxit PDF SDK provides APIs to convert PDF files to MS office suite formats while maintaining the layout and format of your original documents on Windows and Linux platforms.

3.46.1 System requirements

Platform: Windows, Linux

Programming Language: C, C++, Java, Python, C#, Node.js, Go

License Key requirement: 'PDF2Office' module permission in the license key

SDK Version: Foxit PDF SDK for Windows (C, C++, Java, Python, C#) 9.0 or higher; Foxit PDF SDK for Linux (C, C++, Java, Python, C#) 9.1 or higher; Foxit PDF SDK (Node.js) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher


3.46.2 PDF to Office resource files

Please contact Foxit support team or sales team to get the PDF to Office resource files package naming Foxit PDF Conversion SDK (C++).

The required Foxit PDF Conversion SDK versions for different Foxit PDF SDK versions are shown in the table below.

Foxit PDF SDK Version	Required Foxit PDF Conversion SDK Version
9.0/9.1	1.4
9.2	1.5
10.0	2.0
10.1	2.1
11.0	3.0
11.1	3.1

After getting Foxit PDF Conversion SDK package, extract it to a desired directory (for example, extract the package to a directory: "**foxitpdfconversionsdk*_win/**"), and then you can see the resource files for PDF to Office are as follows:

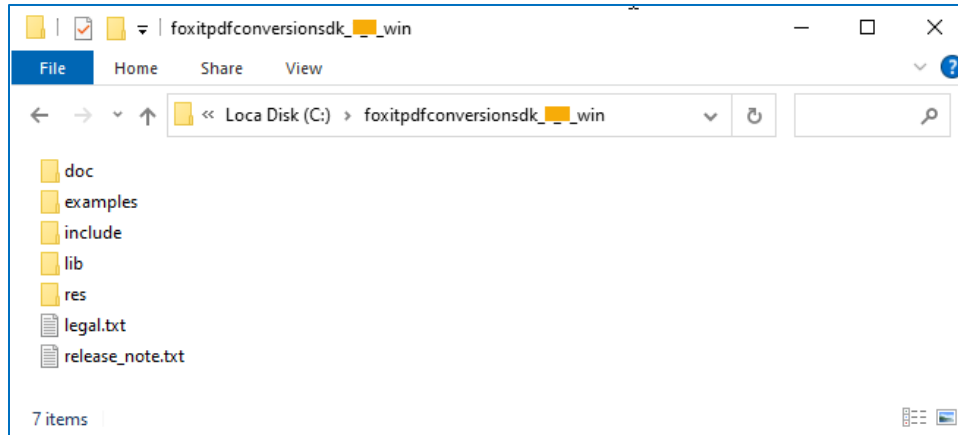

3.46.3 How to run the pdf2office demo

Foxit PDF SDK provides a pdf2office demo located in the "examples\simple_demo\pdf2office" folder to show you how to use Foxit PDF SDK to convert PDF files to MS office suite formats.

3.46.3.1 Prepare a PDF2Office resource directory

Before running the pdf2office demo, you should first extract the PDF to Office resource files (Foxit PDF Conversion SDK) package to a desired directory (for example, extract the package to a directory: "**C:/foxitpdfconversionsdk_*_win/**"), and then pass the engine file located in "lib" folder to the API **PDF2Office.Initialize** to initialize PDF2Office engine.

3.46.3.2 Configure the demo

For pdf2office demo, you can configure the demo in the "examples\simple_demo\pdf2office\pdf2office.cs" file.

Specify the pdf2office engine directory

In the "pdf2office.cs" file, add the path of the engine file "pdf2office" as follows, which will be used to convert PDF files to office files.

```
// Please ensure the path is valid.  
PDF2Office.Initialize("C:/foxitpdfconversionsdk_*_win/lib/fpdfconversionsdk_win32.dll", "");
```

(Optional) Specify whether to enable machine learning-based recognition functionality

```
setting_data.enable_ml_recognition = false;
```

(Optional) Specify the page range to be converted

```
setting_data.page_range = new Range();
```

(Optional) Specify whether to convert the comments in the PDF documents


```
setting_data.include_pdf_comments = true;
```

(Optional) Specify whether to retain the page layout for PDF to Word conversion

```
setting_data.word_setting_data.enable_retain_page_layout = false;
```

Note: Starting from version 10.1, the PDF to Office Conversion engine supports a timeout parameter. This parameter defines the maximum time allowed for the conversion process to complete. If the conversion exceeds the specified time, it will be terminated. The timeout must be a non-negative value. A value of 0 disables the timeout, allowing the conversion to proceed without any time limitation.

3.46.3.3 Run the demo

Once you run the demo successfully, the console will print the following by default:

```
Convert PDF file to Word format file with path.
Convert PDF file to Word format file with stream.
Convert PDF file to Excel format file with path.
Convert PDF file to Excel format file with stream.
Convert PDF file to PowerPoint format file with path.
Convert PDF file to PowerPoint format file with stream.
```

The output files are located in "examples\simple_demo\output_files\pdf2office" folder.

3.46.4 How to work with PDF2office API

```
using System;
using System.IO;
using System.Runtime.InteropServices;
using foxit;
using foxit.common;
using foxit.common.fxcr;
using foxit.addon.conversion.pdf2office;

public class CustomConvertCallback : ConvertCallback
{
    public CustomConvertCallback() {}
    public override bool NeedToPause()
    {
        return true;
    }

    public override void ProgressNotify(int converted_count, int total_count)
    {
    }
}

using (CustomConvertCallback callback = new CustomConvertCallback())
{
```

```
using (Progressive progressive = PDF2Office.StartConvertToWord(input_path + "word.pdf", null, output_path + "pdf2word_result.docx", setting_data, callback))
{
    if (progressive.GetRateOfProgress() != 100)
    {
        Progressive.State state = Progressive.State.e_ToBeContinued;
        while (Progressive.State.e_ToBeContinued == state)
        {
            state = progressive.Continue();
        }
    }
    Console.WriteLine("Convert PDF file to Word format file with path.");
}

using (CustomConvertCallback callback = new CustomConvertCallback())
{
    using (Progressive progressive = PDF2Office.StartConvertToExcel(input_path + "excel.pdf", null, output_path + "pdf2excel_result.xlsx", setting_data, callback))
    {
        if (progressive.GetRateOfProgress() != 100)
        {
            Progressive.State state = Progressive.State.e_ToBeContinued;
            while (Progressive.State.e_ToBeContinued == state)
            {
                state = progressive.Continue();
            }
        }
        Console.WriteLine("Convert PDF file to Excel format file with path.");
    }
}

using (CustomConvertCallback callback = new CustomConvertCallback())
{
    using (Progressive progressive = PDF2Office.StartConvertToPowerPoint(input_path + "powerpoint.pdf", null, output_path + "pdf2powerpoint_result.pptx", setting_data, callback))
    {
        if (progressive.GetRateOfProgress() != 100)
        {
            Progressive.State state = Progressive.State.e_ToBeContinued;
            while (Progressive.State.e_ToBeContinued == state)
            {
                state = progressive.Continue();
            }
        }
        Console.WriteLine("Convert PDF file to PowerPoint format file with path.");
    }
}
```

3.47 DWG to PDF Conversion

From version 10.0, Foxit PDF SDK supports to convert DWG files to PDF files. If you want to use this feature, you should contact Foxit support team or sales team to get the engine files package.

3.47.1 System requirements

Platform: Windows, Linux (x86 and x64), Mac(x64)

Programming Language: C, C++, Java, C#, Python, Objective-C, Node.js, Go

License Key requirement: 'DWG2PDF' module permission in the license key

SDK Version: Foxit PDF SDK (C, C++, Java, C#, Python, Objective-C, Node.js) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

3.47.2 DWG To PDF engine files

Please contact Foxit support team or sales team to get the DWG to PDF engine files package. After getting the package, extract it to the desired directory. For example, extract the package to a directory: "**D:/dwgtopdf/win**" for Windows.

3.47.3 How to run the dwg2pdf demo

Before running the dwg2pdf demo in the "examples\simple_demo\dwg2pdf" folder, you should first add the dwg2pdf engine file in the demo code, for example:

```
// "engine_path" is the path of the engine file "dwg2pdf" which is used to convert dwg to pdf. Please refer to  
Developer Guide for more details.  
static String engine_path = "D:/dwgtopdf/win";
```

Then, run the demo following the steps as the other demos.

3.47.4 How to convert DWG to PDF

```
using foxit;  
...  
// Make sure that SDK has already been initialized successfully.  
...  
foxit.addon.conversion.DWG2PDFSettingData pdf_setting_data = new  
foxit.addon.conversion.DWG2PDFSettingData(); pdf_setting_data.export_flags =  
foxit.addon.conversion.DWG2PDFSettingData.DWG2PDFExportFlags.e_FlagEmbeddedTTF;  
pdf_setting_data.export_hatches_type =  
foxit.addon.conversion.DWG2PDFSettingData.DWG2PDFExportHatchesType.  
e_DWG2PDFExportHatchesTypeBitmap;  
pdf_setting_data.other_export_hatches_type =  
foxit.addon.conversion.DWG2PDFSettingData.DWG2PDFExportHatchesType.  
e_DWG2PDFExportHatchesTypeBitmap;
```

```
pdf_setting_data.gradient_export_hatches_type = foxit.addon.conversion.DWG2PDFSettingData.  
DWG2PDFExportHatchesType.e_DWG2PDFExportHatchesTypeBitmap;  
pdf_setting_data.searchable_text_type =  
foxit.addon.conversion.DWG2PDFSettingData.DWG2PDFSearchableTextType.  
e_DWG2PDFSearchableTextTypeNoSearch;  
pdf_setting_data.is_active_layout = false; pdf_setting_data.paper_width = 640;  
pdf_setting_data.paper_height = 900;  
...  
foxit.addon.conversion.Convert.FromDWG(engine_path, dwg_file_path, output_path, pdf_setting_data);  
...
```

3.48 OFD

OFD (Open Fixed-layout Document) is an open layout document standard formulated by the Chinese government. It is mainly used for scenarios such as electronic official documents, archival storage and exchange. Its purpose is to provide a document format that does not depend on specific software or hardware, ensuring the consistency of document display effects across different devices and platforms.

OFD files not only contain structured data but also support rich graphic elements. They can precisely define the layout and content of the document, including text, images, vector graphics, annotations, etc. The characteristics of the XML format make it easy to understand, process and render, greatly enhancing the interoperability of the document.

OFD files have significant advantages in document integrity, security, and interoperability:

- Document Authenticity: Supports digital signatures to ensure reliable document sources.
- Information Security: Supports encryption to protect sensitive information from unauthorized access.
- Interactivity: Supports interactive features such as form fields and digital signatures, enhancing the user experience.

To handle OFD files, you need to use viewer or editor software that supports the OFD standard. These tools can display, edit, convert, and print OFD documents.

In summary, as a domestic document format standard, OFD has been widely used in government agencies and enterprises. Especially in the case of formal documents that need to be preserved for a long time and legally protected, OFD provides a choice that is more suitable for China's national conditions than traditional PDF. In addition, with the development of technology, OFD is also constantly improving and evolving to meet the growing digital office needs.

3.48.1 System requirements

Platform: Windows, Linux (x64 and armv8)

Programming Language: C, C++, Java, C#, Python, Node.js, Go

License Key requirement: 'OFD' module permission in the license key

SDK Version: Foxit PDF SDK (C, C++, Java, C#, Python, Node.js) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

3.48.2 OFD engine file

Please contact Foxit support team or sales team to get the OFD engine file package.

After getting the package, extract it to the desired directory. For example, extract the package to a directory: "**D:/ofd/win**" for Windows.

3.48.3 How to run the ofd demo

Before running the ofd demo in the "examples\simple_demo\ofd" folder, you should first add the ofd engine file in the demo code, for example:

```
// "engine_path" is the path of ofd engine file. Please refer to Developer Guide for more details.  
string engine_path = "D:/ofd/win/x64"; // For Windows x64
```

Then, run the demo following the steps as the other demos.

3.48.4 How to implement the conversion between OFD file and PDF file

```
using foxit.addon.conversion;  
using foxit.addon.ofd;  
...  
  
// Initialize OFD engine.  
Library.InitializeOFDEngine(engine_path);  
  
String src_ofd_path = input_path + "wm_txttiled.ofd";  
String src_pdf_path = input_path + "test.pdf";  
  
using (OFDConvertParam convert_param = new OFDConvertParam())  
{ // Convert OFD document to PDF document.  
    foxit.addon.conversion.Convert.FromOFD(src_ofd_path, "", output_path + "ofd2pdf.pdf", convert_param);  
    // Convert PDF document to OFD document.  
    foxit.addon.conversion.Convert.ToOFD(src_pdf_path, "", output_path + "pdf2ofd.ofd", convert_param);  
}  
  
// Release OFD engine.  
Library.ReleaseOFDEngine();
```

3.48.5 How to render OFD page

```
using foxit.common;
using foxit.addon.ofd;
using foxit.common.fxcr;
...

// Initialize OFD engine.
Library.InitializeOFDEngine(engine_path);

// Render OFD document to bitmap.
string render_file_path = input_path + "content_flag.ofd";
using (OFDDoc doc = new OFDDoc(render_file_path, ""))
{
    using (OFDPage ofd_page = doc.GetPage(0))
    {
        // Get the size of the page.
        float w = ofd_page.GetWidth();
        float h = ofd_page.GetHeight();
        using (Bitmap bitmap = new Bitmap((int)w, (int)h, Bitmap.DIBFormat.e_DIBArgb, System.IntPtr.Zero, 0))
        {
            // Get the display matrix of the page.
            Matrix2D matrix_1 = ofd_page.GetDisplayMatrix(0, 0, (int)w, (int)h, Rotation.e_Rotation0);

            OFDRenderer ofd_render = new OFDRenderer(bitmap);

            Progressive progressive = ofd_render.StartRender(ofd_page, matrix_1);
            string save_name = output_path + "renderBitmap.bmp";
            // Add the bitmap to image and save the image.
            foxit.common.Image image = new foxit.common.Image();
            image.AddFrame(bitmap);
            image.SaveAs(save_name);
            System.GC.Collect();
            ofd_render.Release();
            ofd_page.Release();
            doc.Release();
        }
    }
}

// Release OFD engine.
Library.ReleaseOFDEngine();
```

3.49 Paragraph Editing

Foxit PDF SDK offers a versatile set of tools for developers to fine-tune and customize text in PDF documents. The paragraph editing module provides complex adjustments, joining, and splitting functions that allow users to have precise control over the content of the document. The features are complemented by an intuitive UI implementation that facilitates efficient editing, ensuring a seamless and customized experience for managing text paragraphs.

The paragraph editing functionality revolves around two core modules, the **ParagraphEditing** module, and the **JoinSplit** module.

The **ParagraphEditing** module is designed to offer a variety of text editing operations, enabling users to easily perform the following actions according to their specific requirements:

- **Insert Text:** Insert new content at specific locations, allowing for customization of the document's precise layout.
- **Delete Text:** Delicately remove paragraphs or characters, enabling highly customized content trimming.
- **Modify Text:** Adjust existing text, including its content and formatting, to suit different editing styles.
- **Format Adjustment:** Support fine adjustments to paragraph formats and text styles, allowing for more accurate typesetting.

The **JoinSplit** module contains four vital operation types to support more complex text processing requirements:

- **Join:** Integrate multiple text blocks, enhancing content layout and overall document consistency.
- **Split:** Finely split text blocks, providing flexibility to manage various sections of the document.
- **Link:** Establish connections between text blocks, ensuring consistency in associated content.
- **Unlink:** Disconnect links between text blocks, offering more control over editing.

3.49.1 System requirements

Platform: Windows, Linux, Mac

Programming Language: C, C++, Java, C#, Python, Objective-C, Go

License Key requirement: 'AdvEdit' module permission in the license key

SDK Version: Foxit PDF SDK (C, C++, Java, C#, Python, Objective-C) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

3.49.2 How to work with paragraph editing

```
using foxit;  
using foxit.common;  
using foxit.common.fxcr;  
using foxit.pdf;  
using foxit.addon.pageeditor
```

```
...  
  
class FxParagraphEditingProviderCallback : ParagraphEditingProviderCallback  
{  
    private int page_index = 0;  
  
    public FxParagraphEditingProviderCallback(int index)  
    {  
        page_index = index;  
    }  
  
    public override void Release()  
    {  
    }  
  
    public override void AddUndoItem(ParagraphEditingUndoItem undo_item)  
    {  
    }  
  
    public override RectF GetClientRect(PDFDoc document)  
    {  
        return new RectF();  
    }  
  
    public override int GetCurrentPageIndex(PDFDoc document)  
    {  
        return 0;  
    }  
  
    public override RectF GetPageRect(PDFDoc document, int page_index)  
    {  
        PDFPage page = document.GetPage(page_index);  
        int width = (int)(page.GetWidth());  
        int height = (int)(page.GetHeight());  
        RectF rect = new RectF();  
        rect.left = 0;  
        rect.bottom = height;  
        rect.right = width;  
        rect.top = 0;  
        page.Dispose();  
        return rect;  
    }  
  
    public override IntPtr GetPageViewHandle(PDFDoc document, int page_index)  
    {  
        return IntPtr.Zero; ;  
    }  
  
    public override RectF GetPageVisibleRect(PDFDoc document, int page_index)  
    {  
        return new RectF();  
    }  
  
    public override Matrix2D GetRenderMatrix(PDFDoc document, int page_index)  
    {  
        PDFPage page = document.GetPage(page_index);  
        int width = (int)page.GetWidth();
```



```
        int height = (int)page.GetHeight();
        Matrix2D matrix = page.GetDisplayMatrix(0, 0, width, height, page.GetRotation());
        page.Dispose();
        return matrix;
    }
    public override Rotation GetRotation(PDFDoc document, int page_index)
    {
        return Rotation.e_Rotation0;
    }
    public override float GetScale(PDFDoc document, int page_index)
    {
        return 1;
    }
    public override Int32Array GetVisiblePageIndexArray(PDFDoc document)
    {
        Int32Array page_array = new Int32Array();
        page_array.Add(0);
        return page_array;
    }
    public override bool GotoPageView(PDFDoc document, int page_index, float left, float top)
    {
        return true;
    }
    public override void InvalidateRect(PDFDoc document, int page_index, RectFArray invalid_rects)
    {
    }
    public override void NotifyTextInputReachLimit(PDFDoc document, int page_index)
    {
    }
    public override void SetDocChangeMark(PDFDoc document)
    {
    }
};

...

using (PDFPage page = doc.GetPage(0))
{
    page.StartParse(0, null, false);
    float height = page.GetHeight();
    string output_dir = output_path;
    int index = page.GetIndex();
    using (FxParagraphEditingProviderCallback callback = new FxParagraphEditingProviderCallback(index))
    {
        using (ParagraphEditingMgr editingMgr = new ParagraphEditingMgr(callback, doc))
        {
            //Paragraph_editing
            ParagraphEditing editing = editingMgr.GetParagraphEditing();
            if (editing.IsEmpty() == true)
                return;
        }
    }
}
```

```

editing.Activate();
editing.StartEditing(0, new PointF(95, height - 728), new PointF(95, height - 728));
editing.SetFontSize(24);
editing.SetUnderline(true);
editing.InsertText("InsertText_Paragraph_editing");
editing.Deactivate();
output_path = output_dir + "Paragraph_editing.pdf";
doc.SaveAs(output_path, (int)PDFDoc.SaveFlags.e_SaveFlagNoOriginal);

//Join&split
JoinSplit joinSplit = editingMgr.GetJoinSplit();
joinSplit.Activate();
joinSplit.OnLButtonDown(0, new PointF(289, 659));
joinSplit.OnLButtonUp(0, new PointF(289, 659));
joinSplit.SplitBoxes();
joinSplit.Deactivate();
output_path = output_dir + "Split_Boxes.pdf";
doc.SaveAs(output_path, (int)PDFDoc.SaveFlags.e_SaveFlagNoOriginal);

joinSplit.Activate();
joinSplit.OnLButtonDown(0, new PointF(307, height - 637));
joinSplit.OnLButtonUp(0, new PointF(307, height - 637));
joinSplit.OnLButtonDown(0, new PointF(307, height - 453));
joinSplit.OnLButtonUp(0, new PointF(307, height - 453));
joinSplit.JoinBoxes();
joinSplit.Deactivate();
output_path = output_dir + "Join_Boxes.pdf";
doc.SaveAs(output_path, (int)PDFDoc.SaveFlags.e_SaveFlagNoOriginal);
    }
}
}

```

3.50 3D Rendering

3D Rendering in PDFs helps convert 3D models into 2D images or animations, which can be embedded in the document. The 3D models can be created using specialized 3D modeling software or CAD (Computer-Aided Design) software and can then be rendered into a 2D format that can be easily viewed within a PDF.

3D Annotation is a feature that allows users to add contextual information to specific parts of these 3D models within the PDF. The annotations can include text, images, and even links to external resources, providing more detailed information and insights about the model.

3.50.1 System requirements

Platform: Windows

Programming Language: C, C++, Java, C#, Python, Go

License Key requirement: '3D' module permission in the license key

SDK Version: Foxit PDF SDK (C, C++, Java, C#, Python) 10.0 or higher; Foxit PDF SDK (Go) 11.0 or higher

3.50.2 How to display the 3D annotation

```
using foxit.addon.pdf3d;

// Load PDF document.
...

PDF3DContext pdf_context = new PDF3DContext(pdf_doc);

// Get the 3d annotation instance array.
PDF3DAnnotInstanceArray annot_data_arr = pdf_context.GetPage3DAnnotArray(0);
if (annot_data_arr.GetSize() == 0) return;
// Class parameter.
PDF3DAnnotInstance annotData = annot_data_arr.GetAt(0);
// Activate the canvas to display the 3d annotation. Pass in a window handle to embed canvas.
annotData.ActivateCanvas(window handle);
```

3.50.3 How to set render mode and controller

```
using foxit.addon.pdf3d;

// Rotate to view 3D annotations.
annotData.SetController(PDF3DAnnotInstance.PDF3DController.e_ControllerRotate);

// Render 3D annotations as transparent.
annotData.SetRenderMode(PDF3DAnnotInstance.PDF3DRenderMode.e_RenderModeTransparent);
```

FAQ

1. How to fix the "'xcopy' exited with code 9009" error when building demos in Visual Studio?

When building demos in Visual Studio, if you encounter the error "'xcopy' exited with code 9009" as follows:

```
'xcopy ..\..\..\..\lib\gsdk_sn.txt ..\..\..\ /y > null
xcopy ..\..\..\..\lib\gsdk_key.txt ..\..\..\ /y > null
xcopy ..\..\..\..\lib\$(PlatformName)_vc10\fsdk.dll ..\..\..\ /y > null
xcopy ..\..\..\..\lib\$(PlatformName)_vc10\fsdk_dotnet.dll ..\..\..\ /y > null' exited with code 9009
```

Please check the following points:

- 1) Check whether the **xcopy.exe** is in the "%SystemRoot%\System32" directory, if not, copy one from another machine.
- 2) Check whether the system **PATH** environment variables have been set correctly. It should contain "%SystemRoot%\System32;%SystemRoot%;", if the environment variables for **xcopy** is right, but it still reports the error, please put the path of **xcopy** in front of others. Maybe some other environment variables have spell mistakes, so that cause the subsequent environment variables are invalid. Please check it.

After checking, open a command prompt, type xcopy command, if it can be recognized, close Visual Studio, and restart the demos. The error should be fixed.

2. How do I get text objects in a specified position of a PDF and change the contents of the text objects?

To get text objects in a specified position of a PDF and change the contents of the text objects using Foxit PDF SDK, you can follow the steps below:

- 1) Open a PDF file.
- 2) Load PDF pages and get the page objects.
- 3) Use **PDFPage.GetGraphicsObjectAtPoint** to get the text object at a certain position.
Note: use the page object to get rectangle to see the position of the text object.
- 4) Change the contents of the text objects and save the PDF document.

Following is the sample code:

```
using foxit.common;
using foxit.pdf;
```

```
using foxit.pdf.graphics;
using foxit.common.fxcr;
...
namespace graphics_objectsCS
{
    class graphics_objects
    {
        ...
        static bool ChangeTextObjectContent()
        {
            string input_file = input_path + "AboutFoxit.pdf";
            using (var doc = new PDFDoc(input_file))
            {
                ErrorCode error_code = doc.Load(null);
                if (error_code != ErrorCode.e_ErrSuccess)
                {
                    Console.WriteLine("The Doc {0} Error: {1}", input_file, error_code);
                    return false;
                }
                try
                {
                    // Get original shading objects from the first PDF page.
                    using (var original_page = doc.GetPage(0))
                    {
                        using (var progressive =
original_page.StartParse((int)PDFPage.ParseFlags.e_ParsePageNormal, null, false))
                        {
                            PointF pointf = new PointF(92, 762);
                            using (var arr = original_page.GetGraphicsObjectsAtPoint(pointf, 10,
GraphicsObject.Type.e_TypeText))
                            {
                                for (int i = 0; i < arr.GetSize(); i++)
                                {
                                    using (var graphobj = arr.GetAt(i))
                                    {
                                        using (var textobj = graphobj->GetTextObject())
                                        {
                                            textobj.SetText("Foxit Test");
                                        }
                                    }
                                }
                            }
                            original_page.GenerateContent();
                        }
                    }
                    string output_directory = output_path + "graphics_objects/";
                    string output_file = output_directory + "After_revise.pdf";
                    doc.SaveAs(output_file, (int)PDFDoc.SaveFlags.e_SaveFlagNormal);
                }
                catch (System.Exception e)
                {

```

```
        Console.WriteLine(e.Message);
    }
    return true;
}
...
}
```

3. Can I change the DPI of an embedded TIFF image?

No, you cannot change it. The DPI of the images in PDF files is static, so if the images already exist, Foxit PDF SDK does not have functions to change its DPI.

The solution is that you can use third-party library to change the DPI of an image, and then add it to the PDF file.

Note: Foxit PDF SDK provides a function "Image.SetDPIs" which can set the DPI property of an image object. However, it only supports the images that are created by Foxit PDF SDK or created by function "Image.AddFrame", and it does not support the image formats of JPX, GIF and TIF.

4. Why do I encounter "Fail to initialize the engine file or cannot load the engine file" for OCR and DWG2PDF modules on Windows 7 when running the corresponding simple demos, even if the engine files have been upgraded to the latest and the simple demos have configured the engine path correctly?

For Windows 7, you need to copy the dll files starting with **api-ms-win*** and the **ucrtbase.dll** in the engine directory to the system directory.

- If you are using a 32-bit engine and running on a 32-bit system, you need to copy the api-ms-win*.dll files and ucrtbase.dll from the engine directory to "C:/Windows/System32".
- If you are using a 32-bit engine and running on a 64-bit system, you need to copy the api-ms-win*.dll files and ucrtbase.dll from the engine directory to "C:/Windows/SysWOW64".
- If you are using a 64-bit engine, you need to copy the api-ms-win*.dll files and ucrtbase.dll from the engine directory to "C:/Windows/System32".


5. How to run the Office2PDF functionality in Windows services?

To run the Office2PDF functionality in Windows services, you need to configure the Office Component Services and permissions.


Take the Word component as an example.

- 1) Press **Win+R**, and then type **Dcomcnfg** to open Component Services, find [Component Services] -> [Computers] -> [My Computer] -> [DCOM Config] -> [Microsoft Word 97-2003 Document], right-click it and select Properties. Choose [Identity], and set it to "**The interactive user**".

Note: if you can't find [Microsoft Word 97-2003 Document] with **Dcomcnfg** command, you can try to use the "**comexp.msc -32**" command.

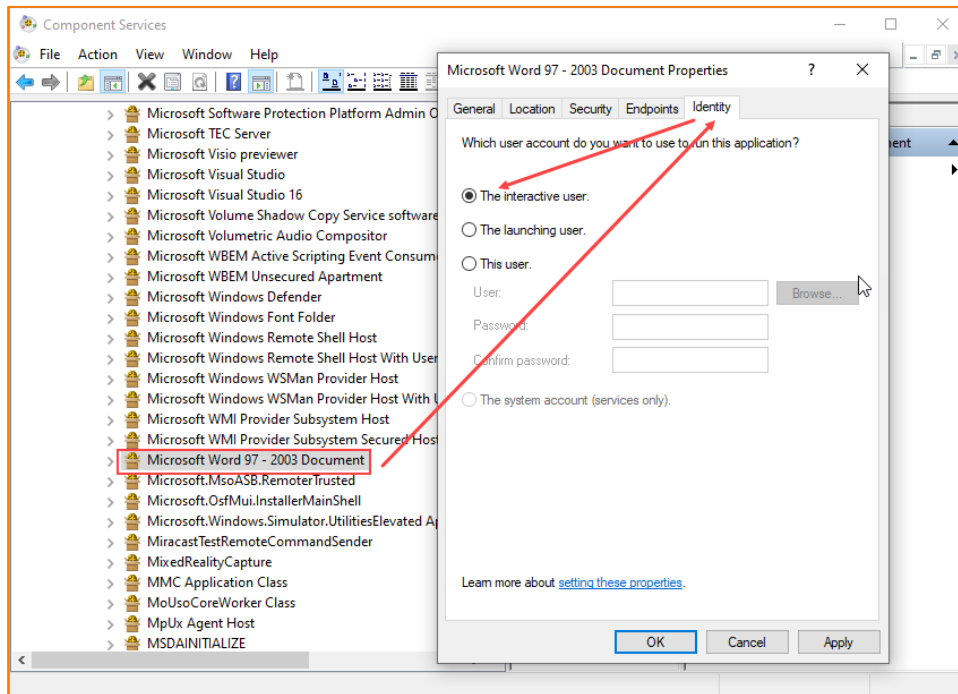

- 2) Set permissions. click [Security], set the [Launch and Activation Permissions] and [Access Permissions] to **Customize**. Click **Edit**, and add the current login account of the system and enable all permissions.

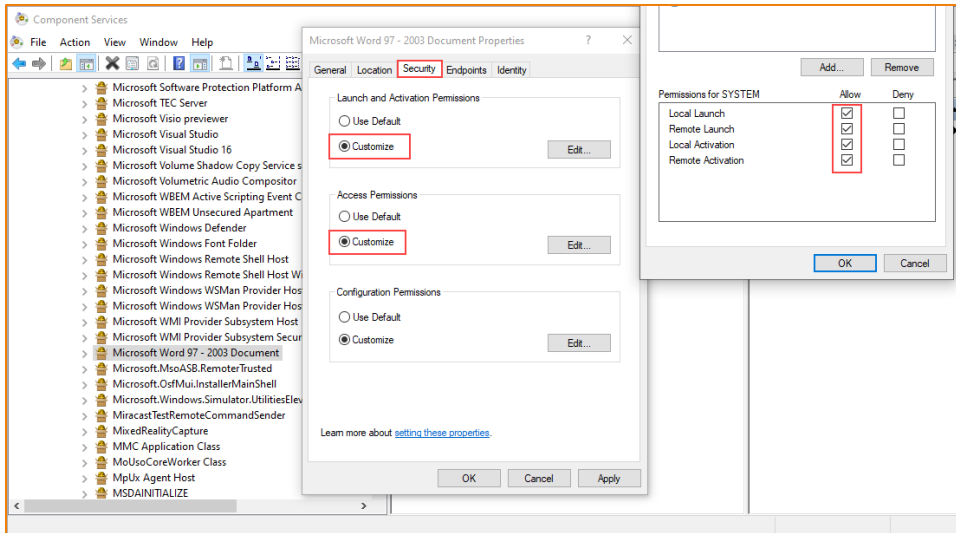

3) After finishing the above settings, the Word2PDF functionality can be run in the Windows services.

6. Why do I encounter "system.badimageformatexception: an attempt was made to load a program with an incorrect format" when using Foxit PDF SDK for .NET?

The error occurs because the application architecture and the dynamic library architecture of the GSDK do not match. You need to set the application's **/platform** to x86, x64 or AnyCPU, and then use the GSDK dynamic library with the corresponding architecture.

Note: The support for **AnyCPU** platform target started from the SDK 10.0 version.

APPENDIX

Supported JavaScript List

Objects' property or method

Object	Properties/Method Names	Minimum Supported SDK Version
annotation properties	alignment	V7.0
	author	V7.0
	contents	V7.0
	creationDate	V7.0
	fillColor	V7.0
	hidden	V7.0
	modDate	V7.0
	name	V7.0
	opacity	V7.0
	page	V7.0
	readOnly	V7.0
	rect	V7.0
	richContents	V7.1
	rotate	V7.0
	strokeColor	V7.0
	textSize	V7.0
	type	V7.0
	AP	V9.0
	arrowBegin	V9.0
	arrowEnd	V9.0
	attachIcon	V9.0
	attachment	V9.0
	borderEffectIntensity	V9.0
	borderEffectStyle	V9.0
	callout	V9.0
	caretSymbol	V9.0
	dash	V9.0
	delay	V9.0
	doc	V9.0
	doCaption	V9.0
	gestures	V9.0
	inReplyTo	V9.0
	intent	V9.0
	leaderExtend	V9.0

Object	Properties/Method Names	Minimum Supported SDK Version
	leaderLength	V9.0
	lineEnding	V9.0
	lock	V9.0
	notelcon	V9.0
	noView	V9.0
	point	V9.0
	points	V9.0
	popupOpen	V9.0
	popupRect	V9.0
	print	V9.0
	quads	V9.0
	refType	V9.0
	richDefaults	V9.0
	seqNum	V9.0
	soundIcon	V9.0
	style	V9.0
	subject	V9.0
	textFont	V9.0
	toggleNoView	V9.0
	vertices	V9.0
	width	V9.0
annotation method	destroy	V7.0
	getProps	V9.0
	setProps	V9.0
	getStateInModel	V9.0
app properties	activeDocs	V4.0
	calculate	V4.0
	formsVersion	V4.0
	fs	V4.0
	fullscreen	V4.0
	language	V4.2
	platform	V4.0
	runtimeHighlight	V4.0
	viewerType	V4.0
	viewerVariation	V4.0
	viewerVersion	V4.0
	printerNames	V8.4
	runtimeHighlightColor	V8.4
	constants	V8.4

Object	Properties/Method Names	Minimum Supported SDK Version
app methods	alert	V4.0
	beep	V4.0
	browseForDoc	V4.0
	clearInterval	V4.0
	clearTimeout	V4.0
	launchURL	V4.0
	mailMsg	V4.0
	response	V4.0
	setInterval	V4.0
	setTimeout	V4.0
	popupMenu	V4.0
	execDialog	V8.4
	execMenuItem	V8.4
	newDoc	V8.4
	openDoc	V8.4
	popupMenuEx	V8.4
	addMenuItem	V8.4
	addSubMenu	V8.4
	addToolButton	V8.4
	removeToolButton	V8.4
	listMenuItems	V8.4
	trustedFunction	V8.4
	beginPriv	V8.4
	endPriv	V8.4
color properties	black	V4.0
	blue	V4.0
	cyan	V4.0
	dkGray	V4.0
	gray	V4.0
	green	V4.0
	ltGray	V4.0
	magenta	V4.0
	red	V4.0
	transparent	V4.0
	white	V4.0
	yellow	V4.0
color methods	convert	V4.0
	equal	V4.0
document properties	author	V4.0

Object	Properties/Method Names	Minimum Supported SDK Version
	baseURL	V4.0
	bookmarkRoot	V7.0
	calculate	V4.0
	Collab	V4.0
	creationDate	V4.0
	creator	V4.0
	delay	V4.0
	dirty	V4.0
	documentFileName	V4.0
	external	V4.0
	filesize	V4.0
	icons	V4.0
	info	V4.0
	keywords	V4.0
	modDate	V4.0
	numFields	V4.0
	numPages	V4.0
	pageNum	V4.0
	path	V4.0
	producer	V4.0
	subject	V4.0
	title	V4.0
	URL	V8.4
	dataObjects	V8.4
	hostContainer	V8.4
	templates	V8.4
	media	V8.4
	dynamicXFAForm	V8.4
	mouseX	V8.4
	mouseY	V8.4
	pageWindowRect	V8.4
	securityHandler	V8.4
	zoom	V8.4
	zoomType	V8.4
	layout	V8.4
	xfa	V8.4
document methods	addAnnot	V7.0
	addField	V4.0
	addIcon	V4.0

Object	Properties/Method Names	Minimum Supported SDK Version
	calculateNow	V4.0
	deletePages	V4.0
	exportAsFDF	V4.0
	flattenPages	V7.1
	getAnnot	V7.0
	getAnnots	V7.0
	getField	V4.0
	getIcon	V4.0
	getNthFieldName	V4.0
	getOCGs	V4.0
	getPageBox	V4.0
	getPageNthWord	V4.0
	getPageNthWordQuads	V4.0
	getPageNumWords	V4.0
	getPageRotation	V7.0
	getPrintParams	V4.0
	getURL	V4.0
	importAnFDF	V4.0
	insertPages	V6.2
	mailForm	V4.0
	print	V4.0
	removeField	V4.0
	replacePages	V6.2
	resetForm	V4.0
	submitForm	V4.0
	mailDoc	V4.0
	addWatermarkFromFile	V8.4
	addWatermarkFromText	V8.4
	getPageLabel	V8.4
	setPageLabels	V8.4
	gotoNamedDest	V8.4
	saveAs	V8.4
	scroll	V8.4
	setPageTabOrder	V8.4
	selectPageNthWord	V8.4
	syncAnnotScan	V8.4
	getAnnot3D	V8.4
	getAnnots3D	V8.4
	addLink	V8.4

Object	Properties/Method Names	Minimum Supported SDK Version
	removeLinks	V8.4
	getLinks	V8.4
	importIcon	V8.4
	removeIcon	V8.4
	addWeblinks	V8.4
	removeWeblinks	V8.4
	closeDoc	V8.4
	exportDataObject	V8.4
	importDataObject	V8.4
	removeDataObject	V8.4
	getDataObject	V8.4
	embedDocAsDataObject	V8.4
	createTemplate	V8.4
	removeTemplate	V8.4
	getTemplate	V8.4
	exportAsText	V8.4
	importTextData	V8.4
	exportAsXFDF	V8.4
	importAnXFDF	V8.4
	exportAsXFDFStr	V8.4
	extractPages	V8.4
	movePage	V8.4
	newPage	V8.4
	getOCGOrder	V8.4
	setOCGOrder	V8.4
	setPageBoxes	V8.4
	setPageRotations	V8.4
	setPageTransitions	V9.1
	getPageTransition	V9.1
event properties	change	V4.0
	changeEx	V4.0
	commitKey	V4.0
	fieldFull	V4.0
	keyDown	V4.0
	modifier	V4.0
	name	V4.0
	rc	V4.0
	selEnd	V4.0
	selStart	V4.0

Object	Properties/Method Names	Minimum Supported SDK Version
	shift	V4.0
	source	V4.0
	target	V4.0
	targetName	V4.0
	type	V4.0
	value	V4.0
	willCommit	V4.0
event methods	add	V9.0
field properties	alignment	V4.0
	borderStyle	V4.0
	buttonAlignX	V4.0
	buttonAlignY	V4.0
	buttonFitBounds	V4.0
	buttonPosition	V4.0
	buttonScaleHow	V4.0
	buttonScaleWhen	V4.0
	calcOrderIndex	V4.0
	charLimit	V4.0
	comb	V4.0
	commitOnSelChange	V4.0
	currentValueIndices	V4.0
	defaultValue	V4.0
	doNotScroll	V4.0
	doNotSpellCheck	V4.0
	delay	V4.0
	display	V4.0
	doc	V4.0
	editable	V4.0
	exportValues	V4.0
	hidden	V4.0
	fileSelect	V4.0
	fillColor	V4.0
	lineWidth	V4.0
	highlight	V4.0
	multiline	V4.0
	multipleSelection	V4.0
	name	V4.0
	numItems	V4.0
	page	V4.0

Object	Properties/Method Names	Minimum Supported SDK Version
	password	V4.0
	print	V4.0
	radiosInUnison	V4.0
	readonly	V4.0
	rect	V4.0
	required	V4.0
	richText	V4.0
	rotation	V4.0
	strokeColor	V4.0
	style	V4.0
	textColor	V4.0
	textFont	V4.0
	textSize	V4.0
	type	V4.0
	userName	V4.0
	value	V4.0
	valueAsString	V4.0
	richValue	V9.0
	submitName	V9.0
field methods	browseForFileToSubmit	V4.0
	buttonGetCaption	V4.0
	buttonGetIcon	V4.0
	buttonSetCaption	V4.0
	buttonSetIcon	V4.0
	checkThisBox	V4.0
	clearItems	V4.0
	defaultIsChecked	V4.0
	deleteItemAt	V4.0
	getArray	V4.0
	getItemAt	V4.0
	insertItemAt	V4.0
	isBoxChecked	V4.0
	isDefaultChecked	V4.0
	setAction	V4.0
	setFocus	V4.0
	setItems	V4.0
	buttonImportIcon	V9.0
	getLock	V9.0
	setLock	V9.0

Object	Properties/Method Names	Minimum Supported SDK Version
	signatureGetModifications	V9.0
	signatureGetSeedValue	V9.0
	signatureInfo	V9.0
	signatureSetSeedValue	V9.0
	signatureSign	V9.0
	signatureValidate	V9.0
global methods	setPersistent	V4.0
Icon properties	name	V4.0
util methods	printd	V4.0
	printf	V4.0
	printx	V4.0
	scand	V4.0
	iconStreamFromIcon	V9.0
identity properties	loginName	V4.2
	name	V4.2
	corporation	V4.2
	email	V4.2
collab properties	user	V6.2
ocg properties	name	V6.2
ocg methods	setAction	V6.2
bookmark properties	color	V8.4
	open	V8.4
	name	V8.4
	parent	V8.4
	children	V8.4
	language	V8.4
	style	V8.4
	platform	V8.4
bookmark methods	createChild	V8.4
	insertChild	V8.4
	execute	V8.4
	setAction	V8.4
	remove	V8.4
certificate properties	binary	V8.4
	issuerDN	V8.4
	keyUsage	V8.4
	MD5Hash	V8.4
	privateKeyValidityEnd	V8.4
	privateKeyValidityStart	V8.4

Object	Properties/Method Names	Minimum Supported SDK Version
	SHA1Hash	V8.4
	serialNumber	V8.4
	subjectCN	V8.4
	subjectDN	V8.4
	validityEnd	V8.4
	validityStart	V8.4
RDN properties	c	V8.4
	cn	V8.4
	e	V8.4
	l	V8.4
	o	V8.4
	ou	V8.4
	st	V8.4
security properties	handlers	V9.0
security methods	getHandler	V9.0
	importFromFile	V9.0
securityHandler properties	appearances	V9.0
	isLoggedIn	V9.0
	loginName	V9.0
	loginPath	V9.0
	name	V9.0
	uiName	V9.0
securityHandler methods	login	V9.0
	logout	V9.0
	newUser	V9.0
signatureInfo properties	objValidity	V9.0
	idValidity	V9.0
	idPrivValidity	V9.0
	docValidity	V9.0
	byteRange	V9.0
	verifyHandlerUIName	V9.0
	verifyHandlerName	V9.0
	verifyDate	V9.0
	subFilter	V9.0
	statusText	V9.0
	status	V9.0
	reason	V9.0
	name	V9.0
	mdp	V9.0

Object	Properties/Method Names	Minimum Supported SDK Version
	location	V9.0
	handlerUIName	V9.0
	handlerUserName	V9.0
	handlerName	V9.0
	dateTrusted	V9.0
	date	V9.0
search properties	attachments	V9.0
	bookmarks	V9.0
	docText	V9.0
	ignoreAccents	V9.0
	markup	V9.0
	matchCase	V9.0
	matchWholeWord	V9.0
	maxDocs	V9.0
	proximity	V9.0
	stem	V9.0
	wordMatching	V9.0
	ignoreAsianCharacterWidth	V9.0
search methods	query	V9.0
	addIndex	V9.0
	removeIndex	V9.0
link properties	borderColor	V8.4
	borderWidth	V8.4
	highlightMode	V8.4
	rect	V8.4
link methods	setAction	V8.4
app.media properties	align	V8.4
	canResize	V8.4
	ifOffScreen	V8.4
	over	V8.4
	windowType	V8.4
app.media methods	createPlayer	V8.4
	openPlayer	V8.4
doc.media methods	getOpenPlayers	V8.4
Playerargs properties	doc	V8.4
	annot	V8.4
	rendition	V8.4
	URL	V8.4
	mimeType	V8.4

Object	Properties/Method Names	Minimum Supported SDK Version
	settings	V8.4
	events	V8.4
MediaPlayer properties	isOpen	V8.4
	isPlaying	V8.4
	settings	V8.4
	visible	V8.4
MediaPlayer methods	close	V8.4
	play	V8.4
	seek	V8.4
	stop	V8.4
MediaSettings properties	autoPlay	V8.4
	baseURL	V8.4
	bgColor	V8.4
	bgOpacity	V8.4
	duration	V8.4
	floating	V8.4
	page	V8.4
	repeat	V8.4
	showUI	V8.4
	visible	V8.4
	volume	V8.4
	windowType	V8.4
floating properties	align	V8.4
	over	V8.4
	canResize	V8.4
	hasClose	V8.4
	hasTitle	V8.4
	title	V8.4
	ifOffScreen	V8.4
	rect	V8.4
eventListener methods	afterClose	V9.0
	afterPlay	V9.0
	afterReady	V9.0
	afterSeek	V9.0
	afterStop	V9.0
	onClose	V9.0
	onPlay	V9.0
	onReady	V9.0
	onSeek	V9.0

Object	Properties/Method Names	Minimum Supported SDK Version
	onStop	V9.0
Template properties	hidden	V9.1
	name	V9.1
Template method	spawn	V9.1
span properties	alignment	V9.1
	fontFamily	V9.1
	fontStretch	V9.1
	fontWeight	V9.1
	fontStyle	V9.1
	strikethrough	V9.1
	subscript	V9.1
	superscript	V9.1
	text	V9.1
	textColor	V9.1
	textSize	V9.1
	underline	V9.1
soap properties	wireDump	V9.1
Soap method	request	V9.1
	streamDigest	V9.1
	streamEncode	V9.1
	streamFromString	V9.1
	stringFromStream	V9.1
hostContainer method	postMessage	V9.2
Fullscreen properties	transitions	V9.2
	defaultTransition	V9.2
	loop	V9.2
	timeDelay	V9.2
	useTimer	V9.2
	isFullScreen	V9.2

Global methods

Method Names	Minimum Supported SDK Version
AFNumber_Format	V4.0
AFNumber_Keystroke	V4.0
AFPercent_Format	V4.0
AFPercent_Keystroke	V4.0
AFDate_FormatEx	V4.0
AFDate_KeystrokeEx	V4.0
AFDate_Format	V4.0

Method Names	Minimum Supported SDK Version
AFDate_Keystroke	V4.0
AFTime_FormatEx	V4.0
AFTime_KeystrokeEx	V4.0
AFTime_Format	V4.0
AFTime_Keystroke	V4.0
AFSpecial_Format	V4.0
AFSpecial_Keystroke	V4.0
AFSpecial_KeystrokeEx	V4.0
AFSimple	V4.0
AFMakeNumber	V4.0
AFSimple_Calculate	V4.0
AFRange_Validate	V4.0
AFMergeChange	V4.0
AFParseDateEx	V4.0
AFExtractNums	V4.0

REFERENCES

[1] PDF reference 1.7

http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=51502

[2] PDF reference 2.0

<https://www.iso.org/standard/63534.html>

[3] Foxit PDF SDK API reference

sdk_folder/doc/Foxit PDF SDK Dotnet API Reference.html

Note: sdk_folder is the directory of unzipped package.

SUPPORT

Foxit Support

In order to provide you with a more personalized support for a resolution, please log in to your [Foxit account](#) and submit a ticket so that we can collect details about your issue. We will work to get your problem solved as quickly as we can once your ticket is routed to our support team.

You can also check out our [Support Center](#), choose Foxit PDF SDK which also has a lot of helpful articles that may help with solving your issue.

Phone Support:

Phone: 1-866-MYFOXIT or 1-866-693-6948